
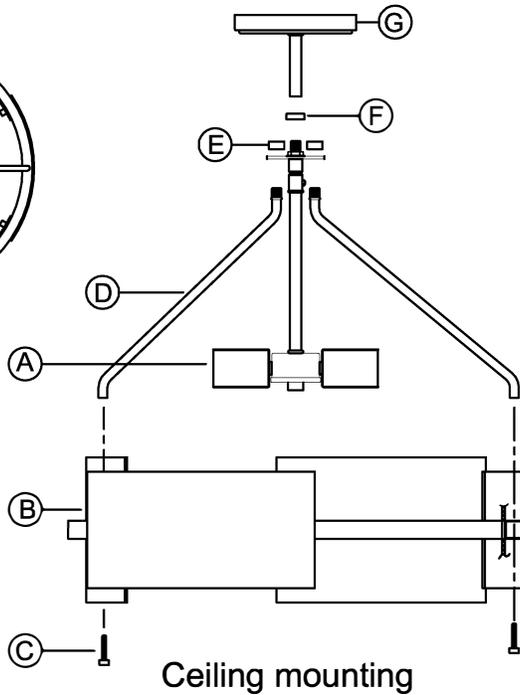



# urban ambiance

Installation Instructions: UHP3862

| PART | DESCRIPTION | QUANTITY |
|------|-------------|----------|
| A    | Fixture     | 1        |
| B    | Frame       | 1        |
| C    | Screw       | 3        |
| D    | Round arm   | 3        |
| E    | Finial      | 3        |
| F    | Seat ring   | 1        |
| G    | Canopy      | 1        |



-OR-

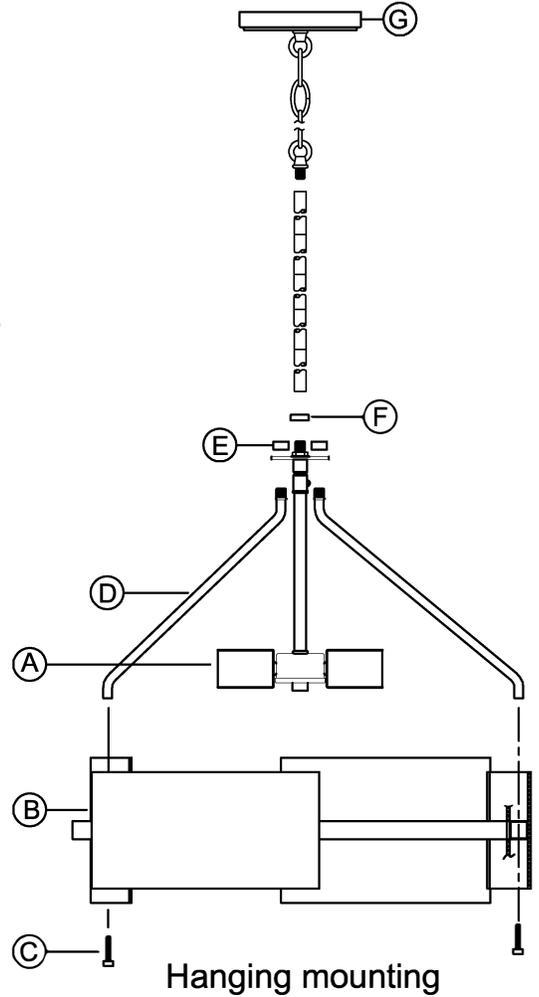

## HARDWARE CONTENTS (not actual size)

|                           |                   |                               |                             |                                  |                             |                                |                              |                             |                            |
|---------------------------|-------------------|-------------------------------|-----------------------------|----------------------------------|-----------------------------|--------------------------------|------------------------------|-----------------------------|----------------------------|
| AA                        | BB                | CC                            | DD                          | EE                               | FF                          | GG                             | HH                           | JJ                          | KK                         |
|                           |                   |                               |                             |                                  |                             |                                |                              |                             |                            |
| Screw<br>(#8-32)<br>Qty:2 | Wire nut<br>Qty:3 | Round Mounting Plate<br>Qty:1 | Hex nut<br>(#8-32)<br>Qty:2 | Cylinder nut<br>(#8-32)<br>Qty:2 | Chain<br>(6 links)<br>Qty:1 | Chain loop<br>(1/8IP)<br>Qty:2 | 12" Pipe<br>(1/8IP)<br>Qty:4 | 6" Pipe<br>(1/8IP)<br>Qty:1 | Nipple<br>(1/8IP)<br>Qty:4 |



### Questions?

Call our Customer Care Team at 1-855-303-4229

urban ambiance

[www.urbanambiance.com](http://www.urbanambiance.com)



## Safety Information

Please read and understand this entire manual before attempting to assemble, operate or install the product.

**CAUTION:** Read instructions carefully and turn electricity off at main circuit breaker panel before beginning installation.

**CAUTION:** Risk of fire. Min. 90°C supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

**WARNING:** If any Special Control Devices are used with this fixture, follow instructions carefully to assure full compliance with N.E.C. requirements. If there are any questions, contact a qualified electrical contractor.

**CAUTION:** All glass is fragile. Use care when handling glass shades and bulbs.

## Preparation

1. Before beginning installation, make sure all parts are included using the contents diagrams from page 1. If any part is missing or damaged, do not attempt to assemble, install or operate the product.


2. Estimated assembly time: 30 minutes.

3. Tools required for assembly (not included): Phillips screwdriver, pliers, wire stripper, safety glasses, electrical tape, ladder.

## Care and Maintenance


Shut off main power supply before cleaning product or changing light bulbs. To clean, wipe with damp cloth. Do not use abrasive cleaners or cleaners that contain alcohol.


## Assembly Instructions

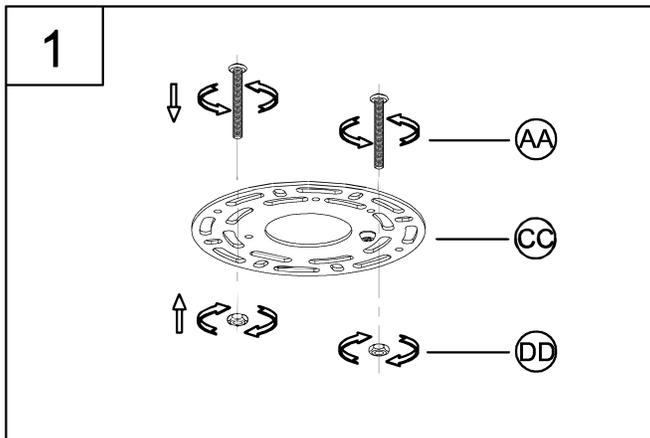

1. Screw screw (AA) onto round mounting plate (CC) and use hex nut (DD) to secure it tightly.

### Hardware Used


|   |                      |   |    |
|---|----------------------|---|----|
|  | Screw                |  | X2 |
|  | Round mounting plate |  | X1 |
|  | Hex nut              |  | X2 |

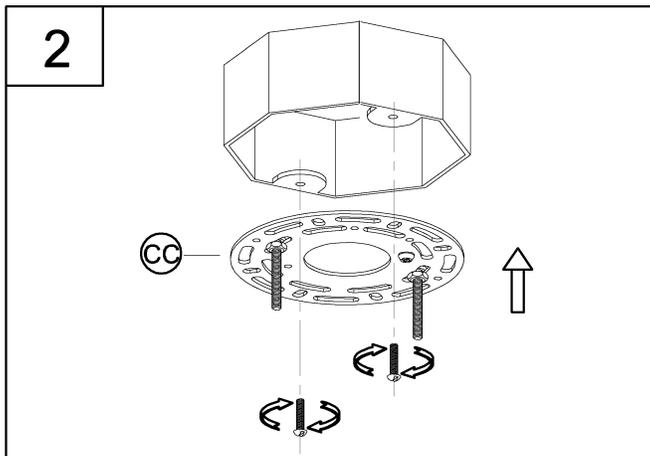

2. Attach assembled parts from step 1 onto outlet box using the mounting screws supplied with the outlet box (not included).


# Ceiling Assembly Instructions

3

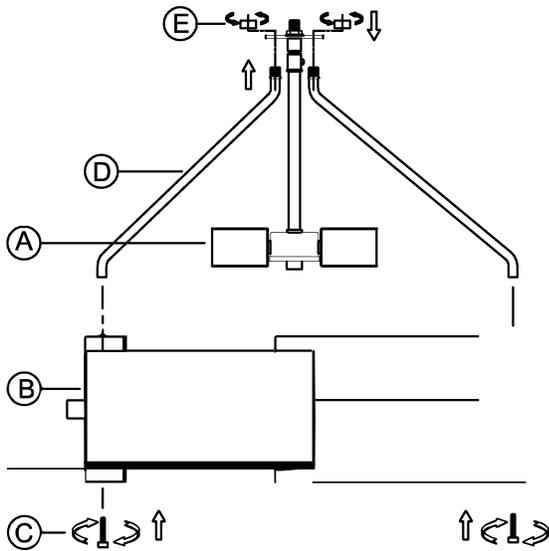

3. Attach round arm (D) to frame (B) use screw (C) to secure tightly; then attach other end of round arm (D) to the steel plate of fixture (A) use finial (E) to secure tightly.

4

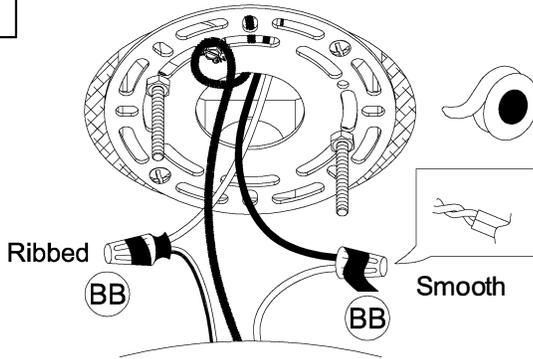

4. Strip 3/8" of insulation from the electrical wire ends. Using wire nuts (BB), connect RIBBED fixture wire to the WHITE supply wire from the outlet box; connect the SMOOTH fixture wire to the BLACK supply wire. Connect the fixture ground wire and supply ground wire using a wire nut or by fastening to the ground screw on the round mounting plate. Push all wire connections into the outlet box.


BB

Wire nut



X3

5

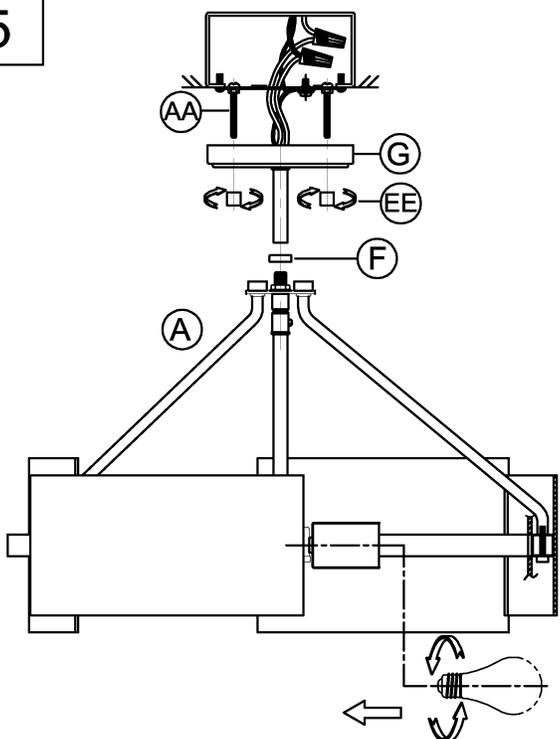

5. Attach seat ring (F) onto fixture (A), thread fixture (A) onto canopy to secure tightly.

Attach canopy (G) to screws (AA) use cylinder nuts (EE) to secure tightly.

EE

Cylinder nut




X2

Screw lamp (not included) into fixture socket. Use 60-watt MAX incandescent medium base lamp, SBCFL or SBLED.

# Hanging Assembly Instructions

6

## Canopy Parts

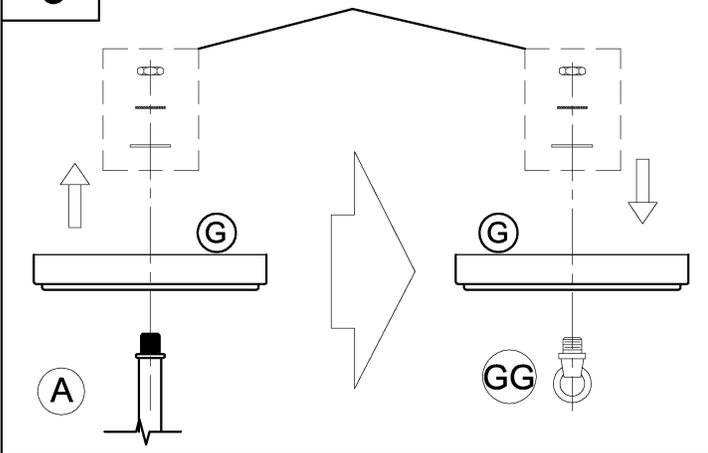

6. Remove existing canopy parts and canopy (G) from fixture(A).

Install canopy parts and chain loop(GG) into canopy (G), Secure tightly.




Chain loop



X1

7

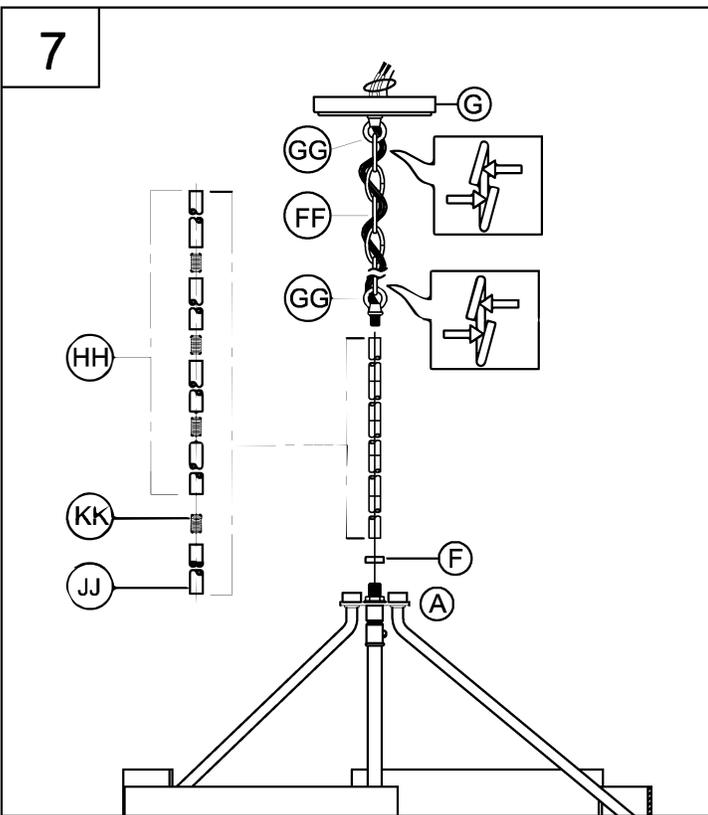

7. Pass the wires through the seat ring (F) / nipple (KK)/one pipe (JJ)/four pipe (HH) to achieve overall desired length. Next attach seat ring (F) / pipe onto fixture (A) , secure tightly. Weave electric cord and ground wire through chain (FF) and chain loop (GG). Open two links of chain and attach both ends to chain loops (GG). Close the chain links.

NOTE: During this step, you may choose to shorten the chain and electrical/ground wires.



Chain



X1




Chain loop



X2




12" Pipe



X4



6" Pipe



X1




Nipple



X4

8

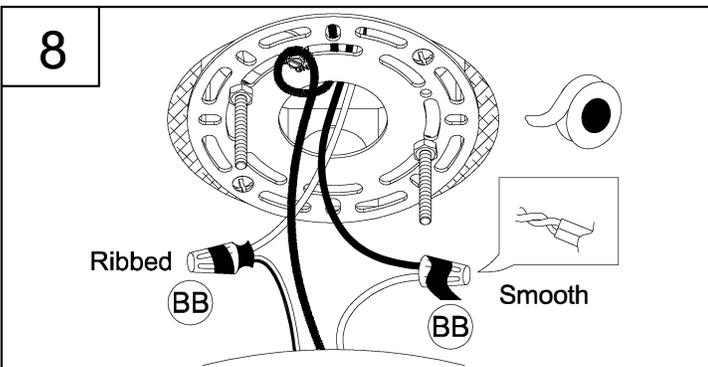

8. Strip 3/8" of insulation from the electrical wire ends. Using wire nuts (BB), connect RIBBED fixture wire to the WHITE supply wire from the outlet box; connect the SMOOTH fixture wire to the BLACK supply wire.

Connect the fixture ground wire and supply ground wire using a wire nut or by fastening to the ground screw on the round mounting plate. Push all wire connections into the outlet box.




Wire nut



X3

# Hanging Assembly Instructions

9

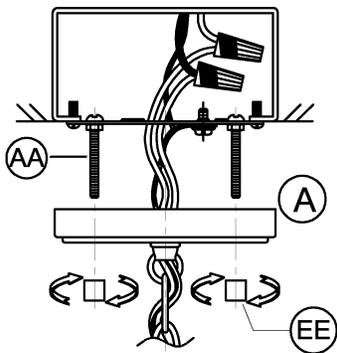


9. Secure the fixture (A) to screws (AA) use the two cylinder nuts (EE) to secure tightly.

(EE) Cylinder nut



X2

10

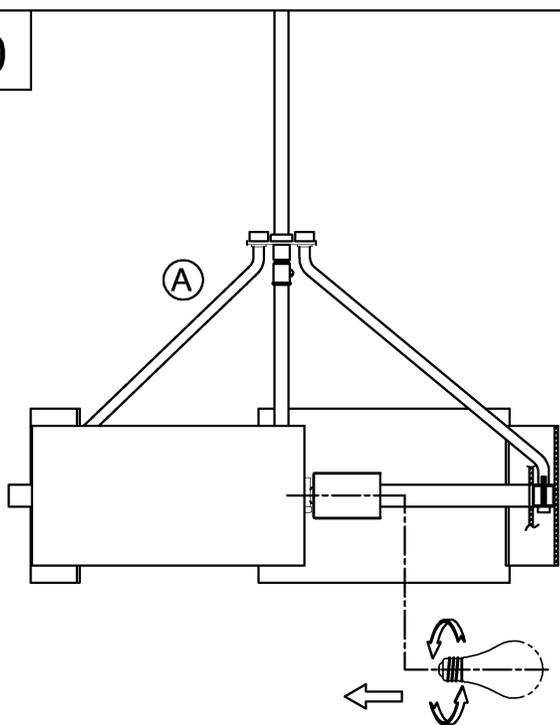

10. Screw lamp (not included) into fixture socket. Use 60-watt MAX incandescent medium base lamp, SBCFL or SBLED.



**Questions?**

Call our Customer Care Team at 1-855-303-4229

urban ambiance

[www.urbanambiance.com](http://www.urbanambiance.com)