




see what Delta can do™

Pendant Raincan

- H₂Okinetic® Pendant Raincan
- Single Spray Setting Pendant Raincan

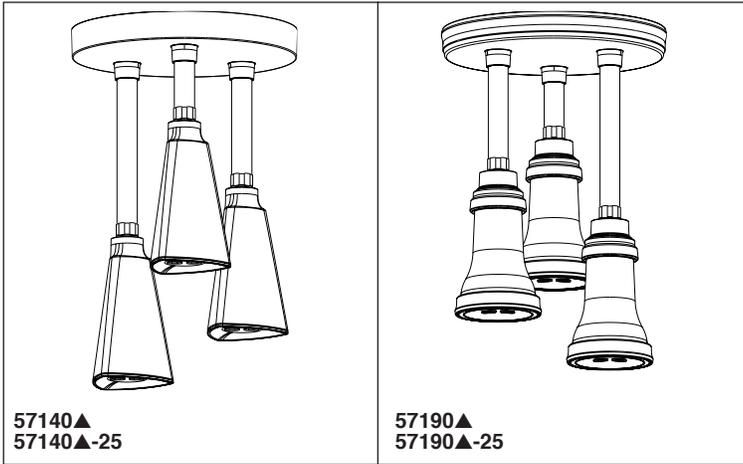


57140▲
57140▲-25


57190▲
57190▲-25

Submitted Model No.: _____

Specific Features: _____

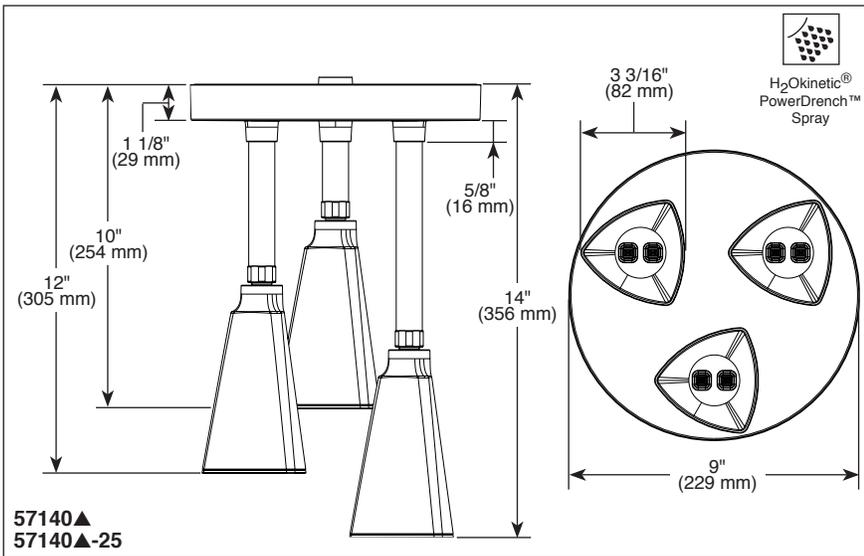

57140▲
57140▲-25

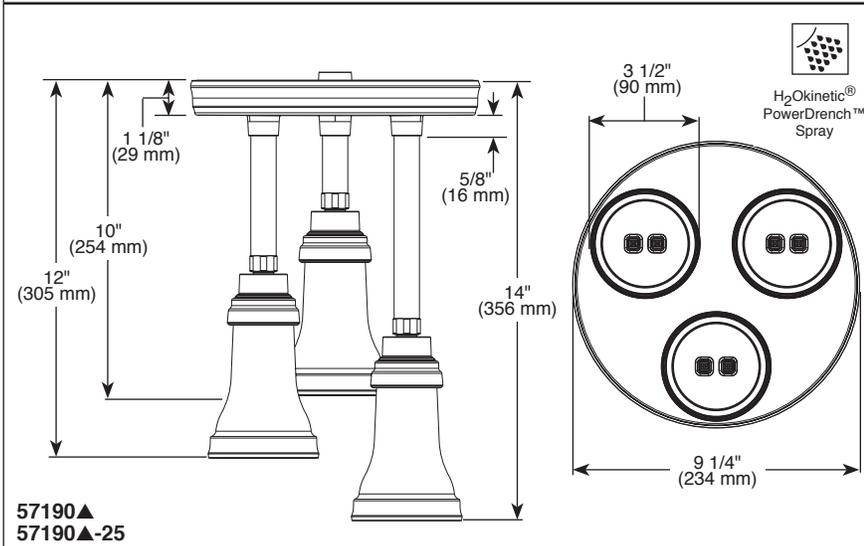

57190▲
57190▲-25

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-57140 Rev. D

STANDARD SPECIFICATIONS:

- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa (57140▲, 57190▲)
- Maximum 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa (57140▲-25, 57190▲-25)
- Adjustable pendant showerheads for ideal coverage
- To be used with a 9" (2286 mm) ceiling or taller
- Connects to 1/2" IPS male threads

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® (57140▲, 57190▲ only)

Delta Faucet Company

55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1
© 2018 Delta Faucet Company