

# EML6 LED Emergency Light

The NICOR EML6 emergency light provides a code compliant solution for outdoor and wet location requirements. The UL924 Wet Location listed fixture is made from an ABS corrosionresistant enclosure, making it a durable option. The EML6 Series is available in white and features universal wall mounting with the EZ quick connect. Designed with high output LEDs, the EML6 has exceptional light distribution and a maintenance-free nickel-cadmium battery.

### Construction

- Injection molded thermoplastic ABS housing, UL-94-V-0 rated material
- Injection molded clear polycarbonate face

### Optical System

- Each head is designed with an optical lens to smooth the beam pattern and minimize pixilation

### Electrical

- Operating temperature rating of 5°F to 104°F (-15°C to 40°C)
- Maintenance-free nickel-cadmium battery provides 90-minute emergency operation & recharges in 24 hours
- 120/277VAC Dual Voltage Operation, 60Hz input
- Includes test switch/power indicator light

### LED

- LED lamps provide an average luminous flux of 265 lumens

### Finish

- White textured thermoplastic housing

### Installation

- Surface wall mounting
- Universal mounting plate with EZ quick connect
- Universal knockout pattern provided on housing for surface mount install

### Compliance

- UL Listed for wet locations
- UL 924

### Warranty


- 2-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)



100° TILT WITH 100° ROTATION



NEW!

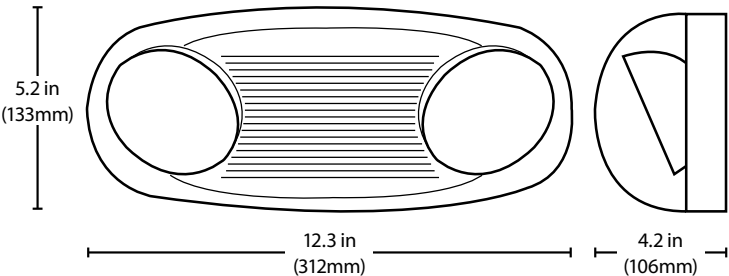

Product Information	
Input Voltage (VAC)	120/277
Power Draw (W)	2.4W
Emergency Operation	Minimum 90 Minutes



## Applications



The EML series can be installed in many applications such as hallways, hospitals, schools, restaurants, event venues and more.

## Installation



Easy installation with mounting plate for access to wiring compartment. Knock outs provide pattern to be installed into a standard junction box.



Adjustable head lamps with 100° tilt and 100° rotation to aim the light where it is most needed.

Ordering Information			
Series	Version	Voltage	Housing Color
EML6	1 (Version 1)	UNV (120/277VAC)	WH (white)