


SAFAVIEH

LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM #:LIT44 34A

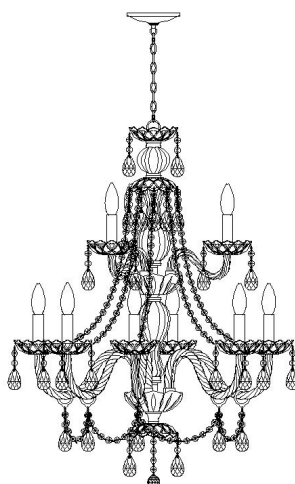

Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

Part List and Hardware List

| PIECE | DESCRIPTION | PICTURE | QUANTITY | PIECE | DESCRIPTION | PICTURE | QUANTITY | PIECE | DESCRIPTION | PICTURE | QUANTITY |
|-------|-----------------------|---------|----------|-------|------------------------|---------|----------|-------|----------------------------|---------|----------|
| A | Mounting bar | | 1X | J | Crystal string (Long) | | 6X | S | Glass bowl (small hole) | | 1X |
| A1 | Mounting screw | | 2X | K1 | Flat washer | | 2X | T | Metal finial | | 1X |
| B1 | Canopy | | 1X | K2 | Internal teeth washer | | 9X | U | Dropper | | 1X |
| B2 | Support wire cap | | 1X | L | Acrylic ring | | 6X | V | Bulb | | 9X |
| C | Lock | | 1X | M | Flastic washer | | 2X | W1 | Metal round plate (3 hole) | | 1X |
| D | Out ring | | 1X | N | Spring washer | | 9X | W2 | Metal round plate (6 hole) | | 1X |
| E | Chain | | 1X | O | Dropper | | 56X | X | Glass arm (big) | | 6X |
| F | Wire nut | | 6X | P | Crystal string (short) | | 6X | Y | Hex screw | | 12X |
| G | Glass bowl (Big hole) | | 9X | Q | Glass bowl | | 1X | Z | Top lampbody | | 1X |
| H | Socket cover | | 9X | R | Trumpet cap | | 1X | Z1 | Bottom lampbody | | 1X |
| I | Glass arm (Short) | | 3X | | | | | | | | |

Installation

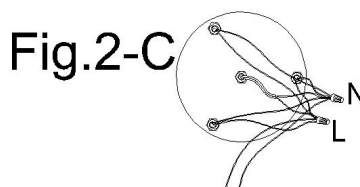
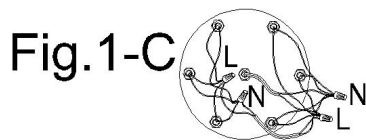
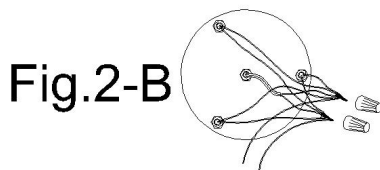
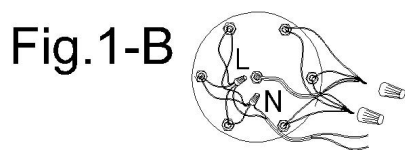
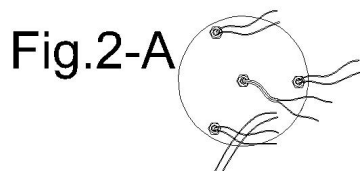
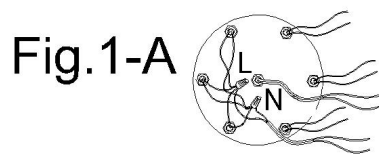


Fig.3 Long glass arm






Fig.4 Short glass arm

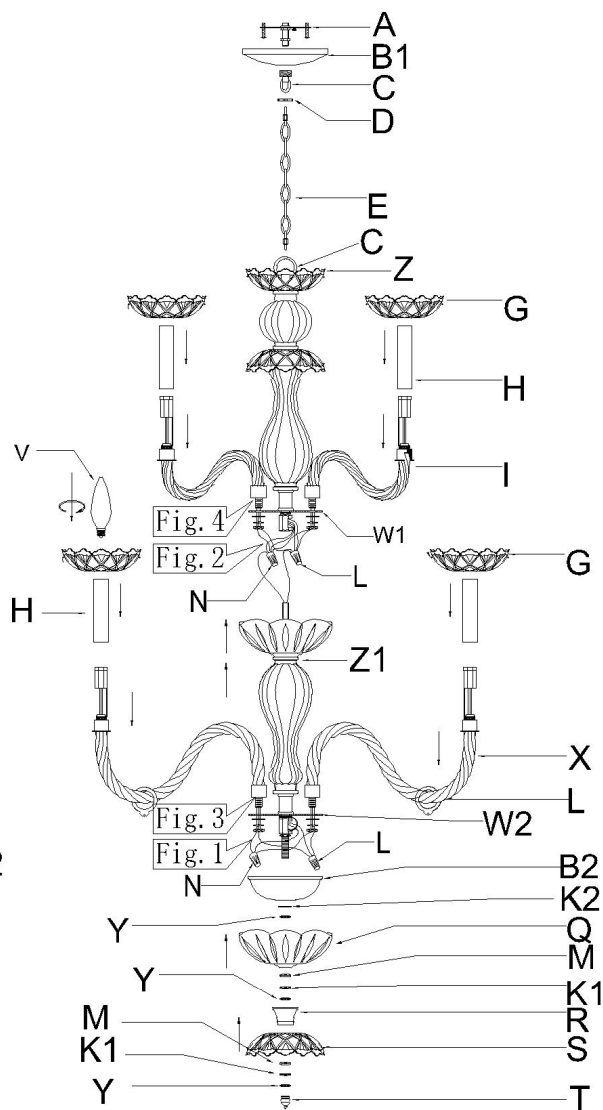

Step 1

Unpack all parts from cartons carefully

Place the glass arm(I) to the metal round plate(W1),then tighten with internal teeth washer(K2) , spring washer(N) and hex screw(Y)

Place the glass arm(X) to the metal round plate(W2),then tighten with internal teeth washer(K2) , spring washer(N)and hex screw(Y).

Connect electrical wire by wire nut(F) , identify positive and neutral(See step2)

Secure the support wire cap(B2),internal teech washer(K2),hex screw(Y), glass bawl(Q),plastic washer(M),flat washer(K1), hex screw(Y),trumpet cap(R), Glass bowl (S), plastic washer(M),flat washer(K1)and hex screw(Y) to the tube of bottome lampbody(Z1) and tighten with metal finial(T)


Wire the top body(Z) to the bottom body(Z1),connect electrical wire by wire nut(F) , identify positive and neutral(See step2)

Place the acrylic ring(L),the socket cover(H) to the socketn then glass bowl(G)


Place the bulb(V) to the socket

Step 2 Wire connection

| Connect,Hot,Black or Red outlet Supply Wire to: | Connect,Neutral,White Outlet Supply Wire to: |
|---|---|
| Black | White |
| * Parallel Cord(round & smooth) | * Parallel Cord(square& ridged) |
| Clear,Brown,Gold or Black without Tracer(colored stripes) | Clear,Brown,Gold or Black without Tracer(colored stripes) |
| Insulated Wire(not green) with copper metal conductor | Insulated Wire(not green) with Silver metal conductor |



*Note: When parallel wire(SPT I & SPT II) is used.The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left.)



Step 3

Hang list:


Hang dropper(O) on the hole of acrylic ring(L),the glass bowl(G) of the lampholder, the top glass bowl and the bottom glass bowl(S)

Hang dropper(O) on the acrylic ring(L)

Hang crystal string(L) on the hole(a)(b)

Hang crystal string(P) on the hole(c) of acrylic ring(L)

Hang dropper(U) on the metal finial(T)

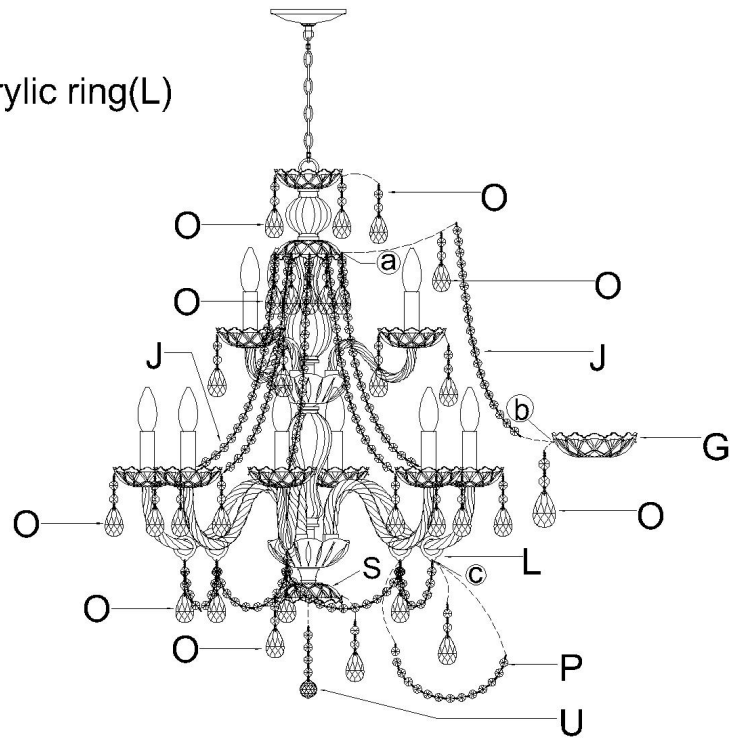


Step 4

Installing the mounting bar(A) with screws, and secure canopy(B) with the lock (C) and tighten with out ring(D)


Step 5

Installing whole body to the top lock(C)

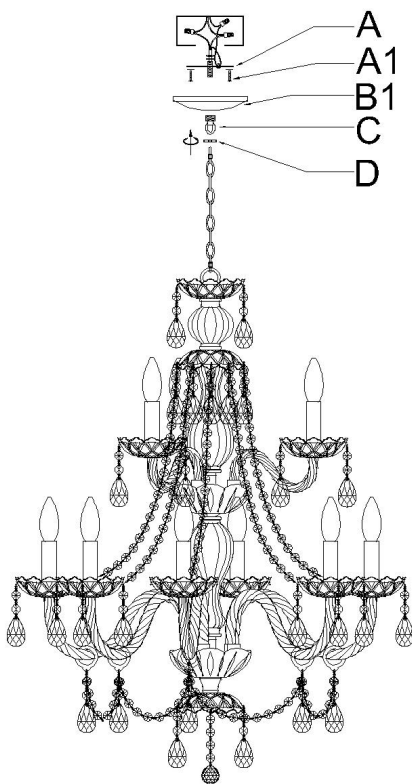

Step 6

Consult a qualified electrician to ensure correct branch circuit conductor

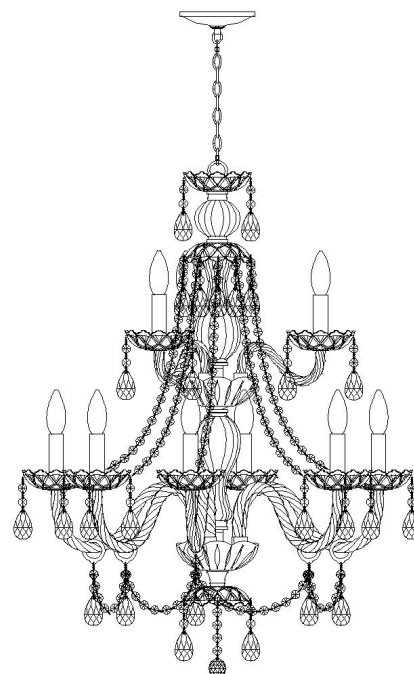

ENJOY YOUR LAMP