


DOWELL



012 Series-24/30/36

Bathroom Cabinet



INSTALLATION GUIDE

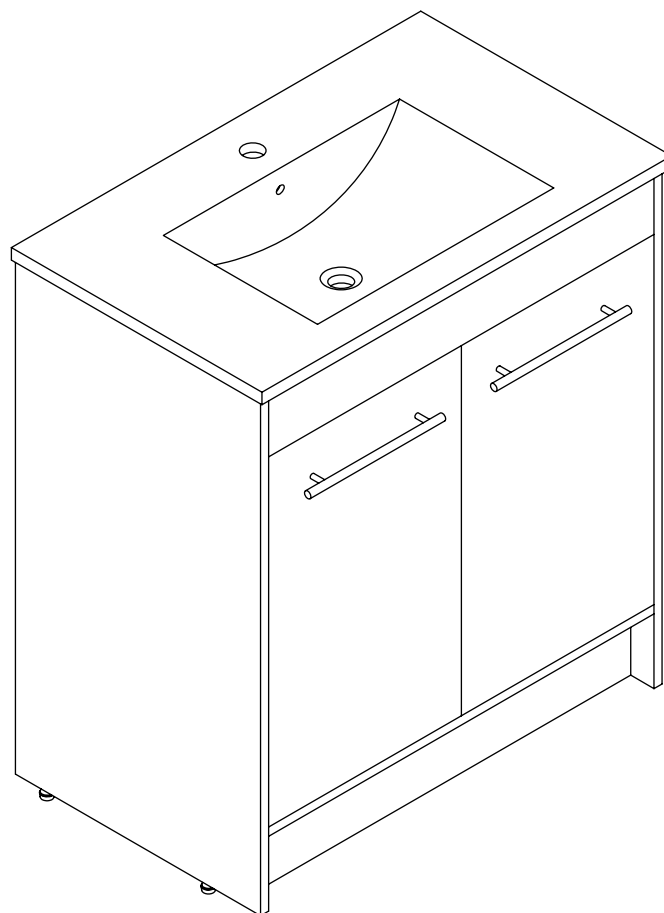



24" Vanity + Ceramic Basin Drawing

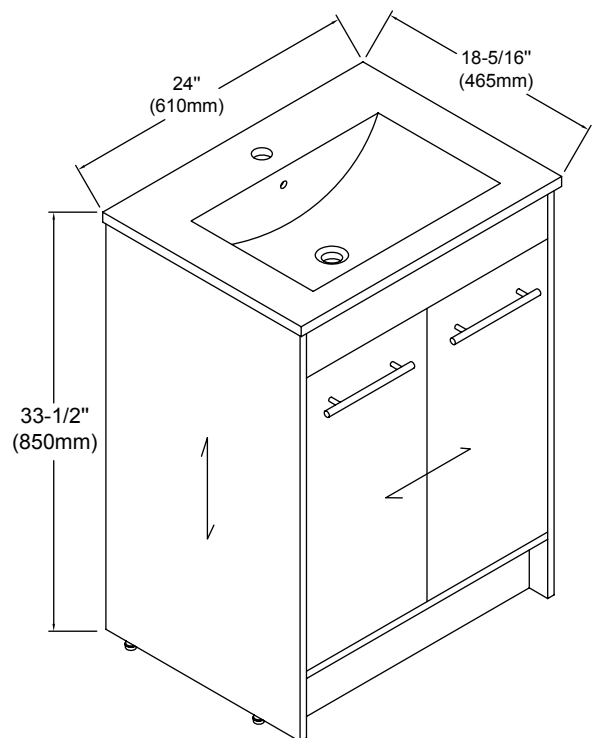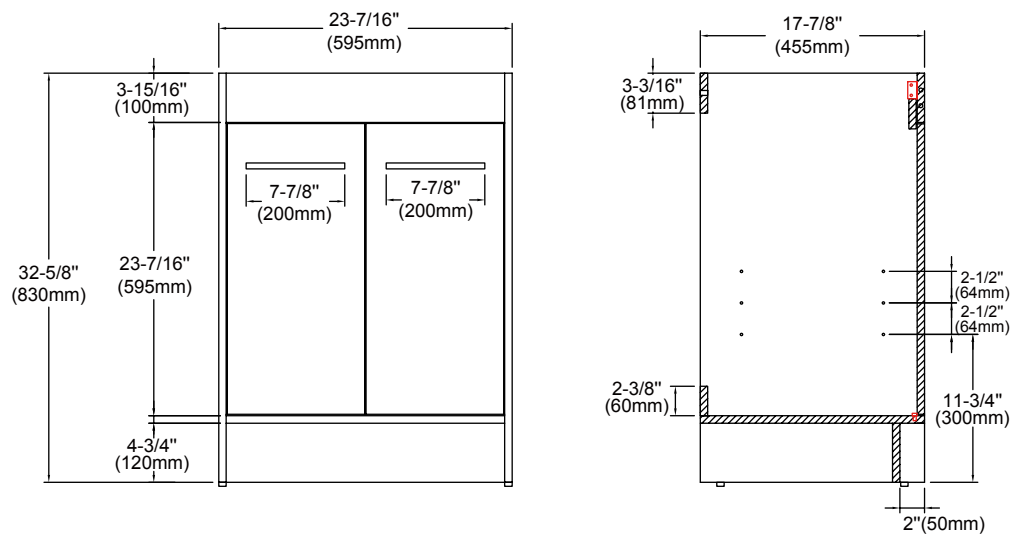

30" Vanity + Ceramic Basin Drawing

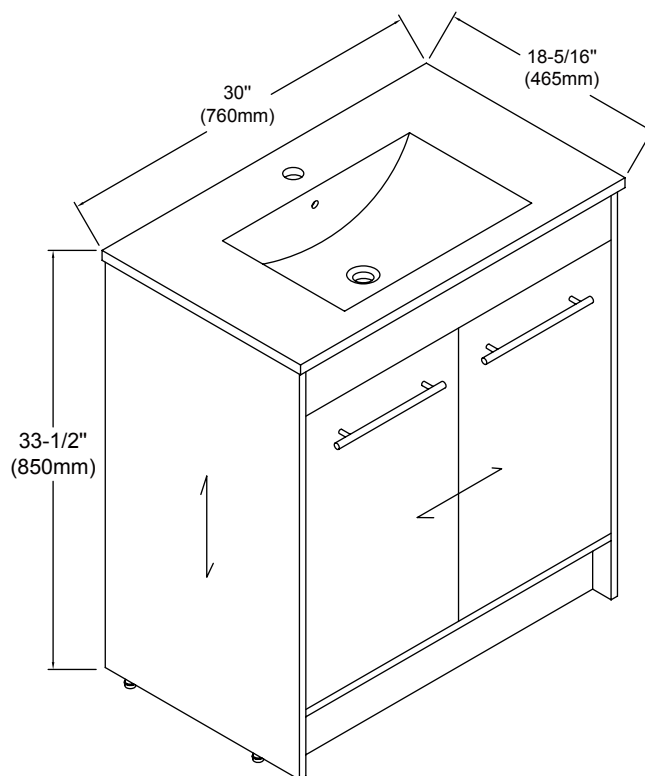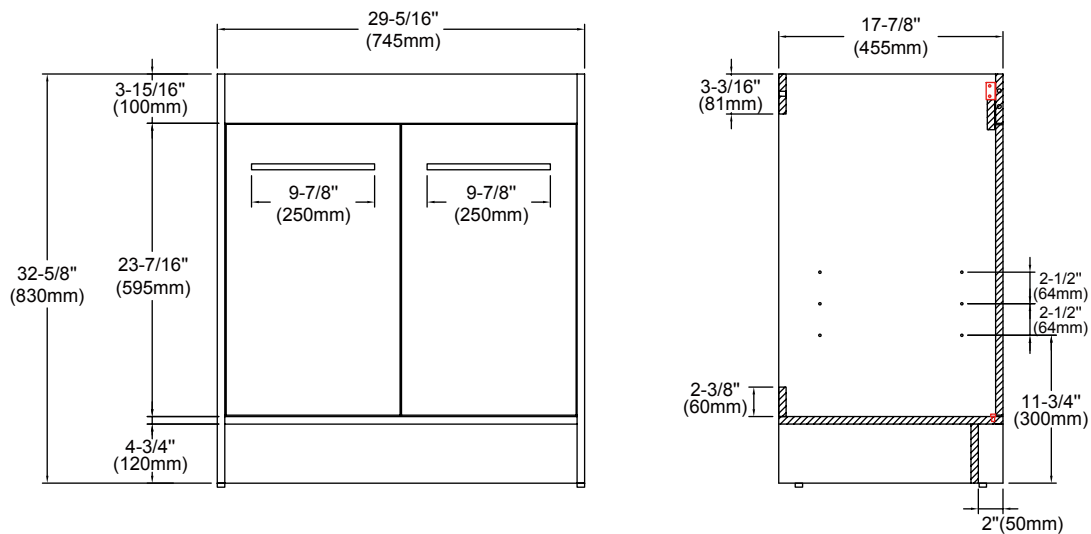

36" Vanity + Ceramic Basin Drawing

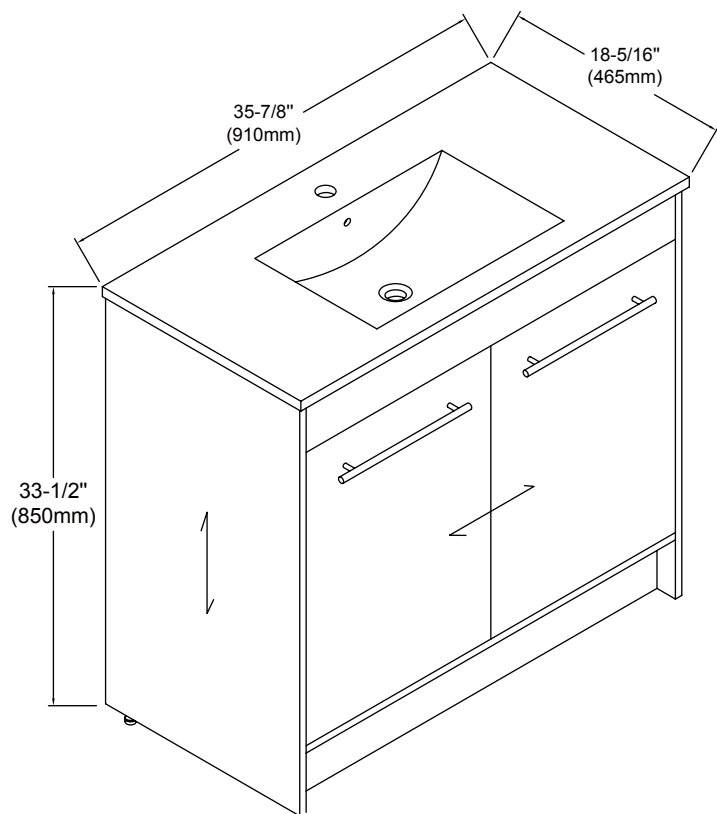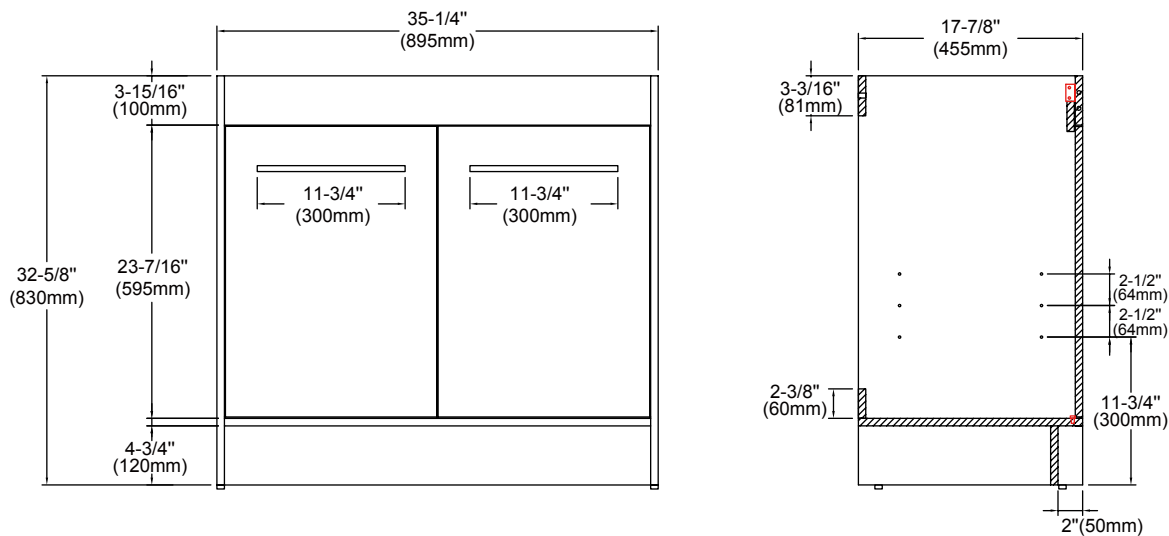


Hardware


NO.	Draw	QTY
A	 Screws Ø4x14mm	48
B	 Two-in-one connector	26
C	 Two-in-one connector	26
D	 Wood plug	6
E	 Plastic anchor(Ø10mm)	2
F	 Screws for fix on the wall	2
G	 Bracket (53x70x44mm)	2
H	 Bracket (19x19x35mm)	2
I	 Bracket (14x14x28mm)	1

NO.	Draw	QTY
J	 Hinges	4
K	 Handles	2
L	 Screws M4x18mm	4
M	 Anti-collision gasket	4
N	 Adjustable feet	4
O	 Door stopper	2
P	 Movable laminate support	4
Q	 Screwdriver	1

Components

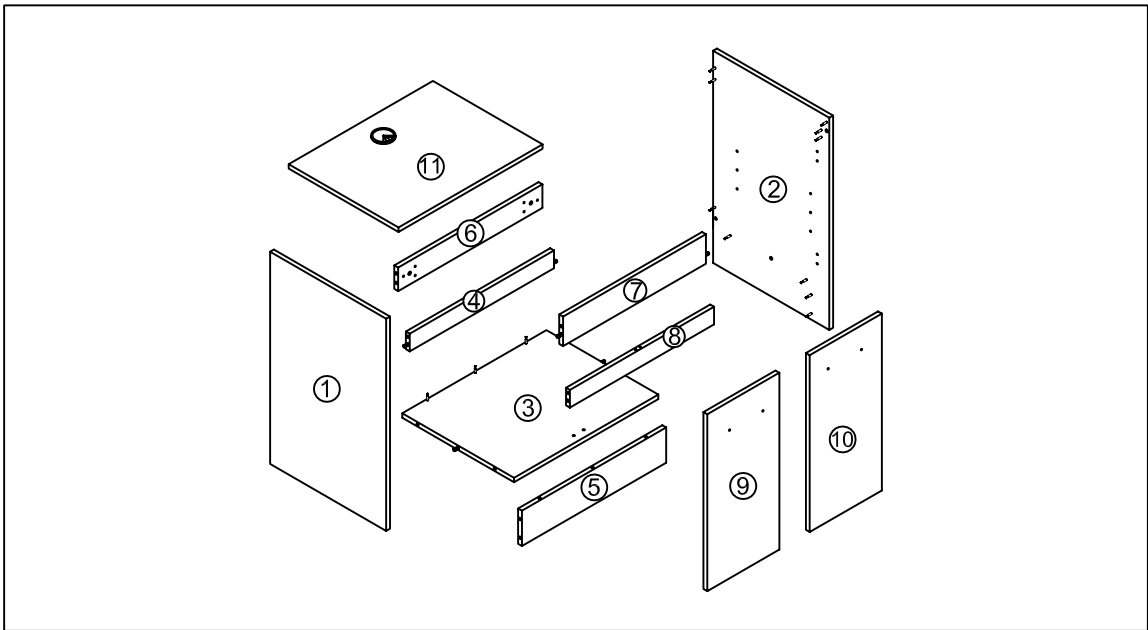





Recommended tools You Will Need-Outils Requis

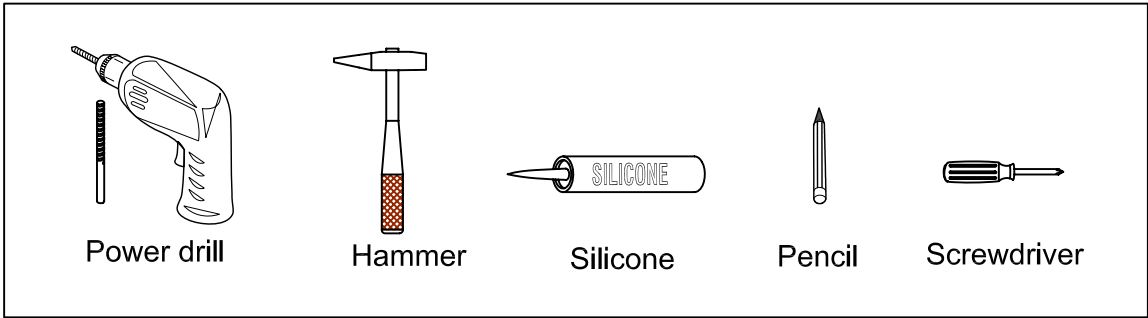


Bathroom Cabinet INSTALLATION GUIDE

DOWELL


Step 1

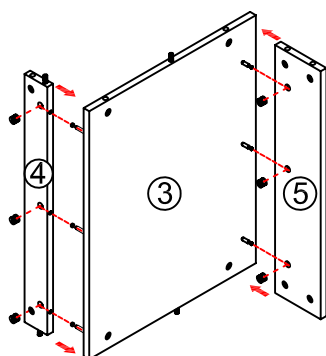


Notes: Screw installation depth as shown







Attention: Cam lock arrow point to the steel rod.



Step 2

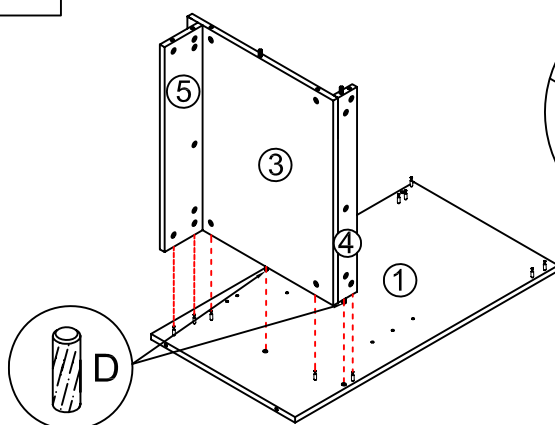

Note: The D parts are used for these two holes

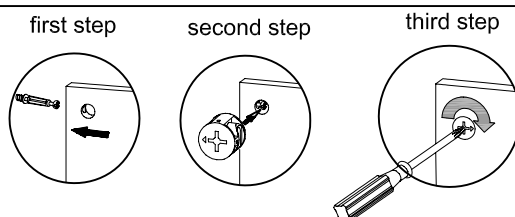

Step 3

	x5
B	
	x5
C	
	x1
D	
	x1
Q	

Step 4

Note: The D parts are used for these three holes

	x10
B	
	x10
C	
	x3
D	
	x1
Q	


Step 5

	x2
G	
(Ø4 x 14mm)	
	x12
A	
	x2
O	
Tool	

Step 6

	x2
H	
	x1
I	
(Ø4 x 14mm)	
	x12
A	
Tool	


Step 7

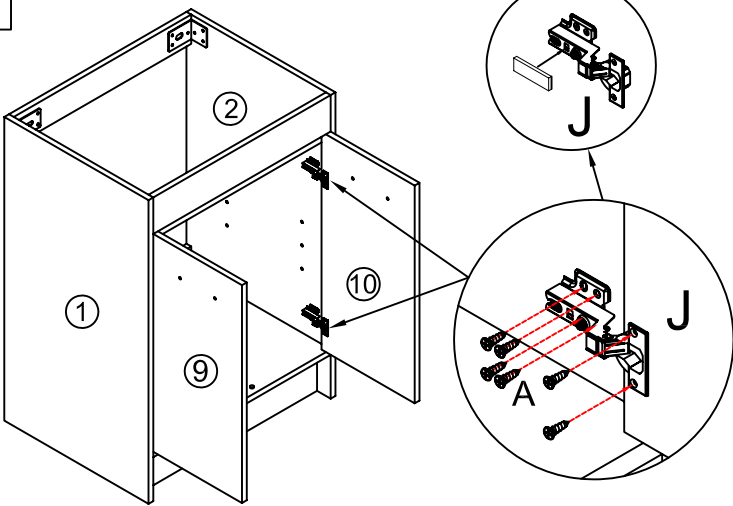


 x4
J
($\varnothing 4 \times 14\text{mm}$)
 x24
A

Tool

You can adjust the doors by tightening or loosening the screws on the hinge. →

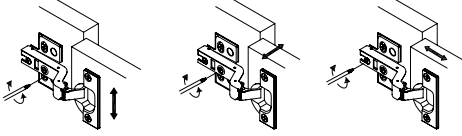

Step 8

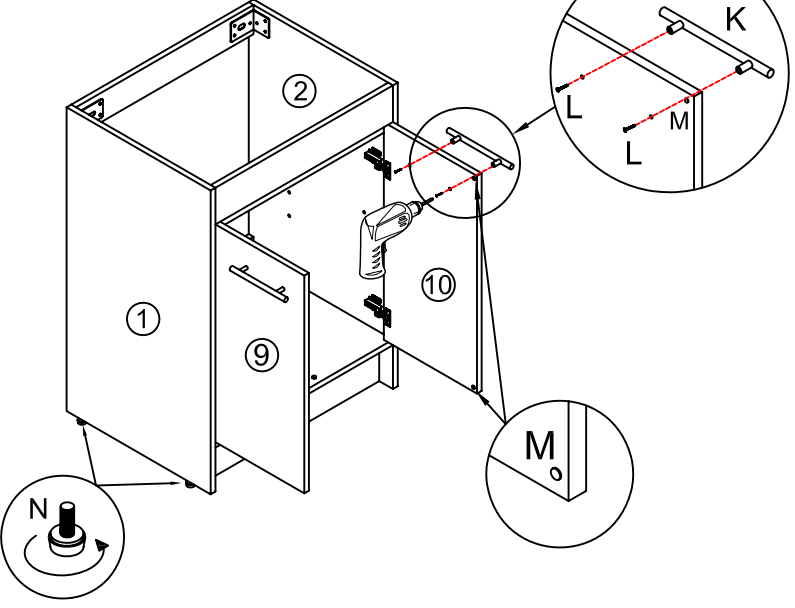

 x2
K
 x4
L
 x4
M
 x4
N

Tool

