
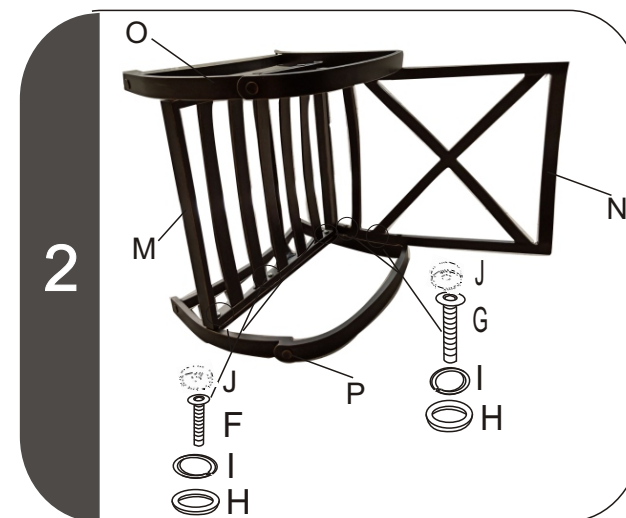


ASSEMBLY INSTRUCTIONS

(For LD18731-7)

Parts List

Pieces	Schema	Description	QTY
A	(M8*35)	Screw	4
B	(M8)	Flat washer	8
C	(M8)	Lock washer	4
D	(M8)	Nut	4
E		Nut cap	4
F	(M6*30)	Screw	6
G	(M6*45)	Screw	4
H	(M6)	Small flat washer	10
I	(M6)	Small lock washer	10
J	(M6)	PVC cover	10
K		Wrench	1
L		Wrench	1
M		Seat frame	1
N		Back frame	1
O		Arm left	1
P		Arm right	1
Q		Base	1
Q1		Foot band	1
R		Foot leveler	4
S		Back Cushion	1
S1		Seat Cushion	1

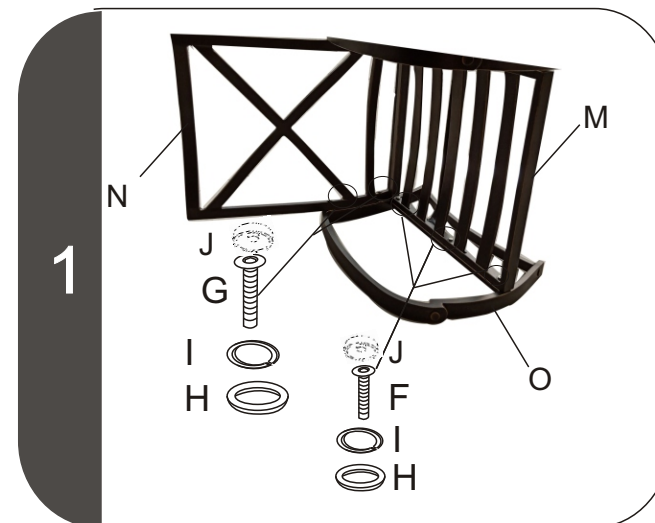

WARNING!


○ This chair has a 275 lbs weight capacity.

○ If cushion gets wet, hang over chair to dry to prevent mold/mildew.

ATTENTION:

1. Please read these instructions carefully before assembly.
2. Since aluminum is soft metal, over tightening may strip threads or break the parts.
3. DO NOT use power tools.
4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

3

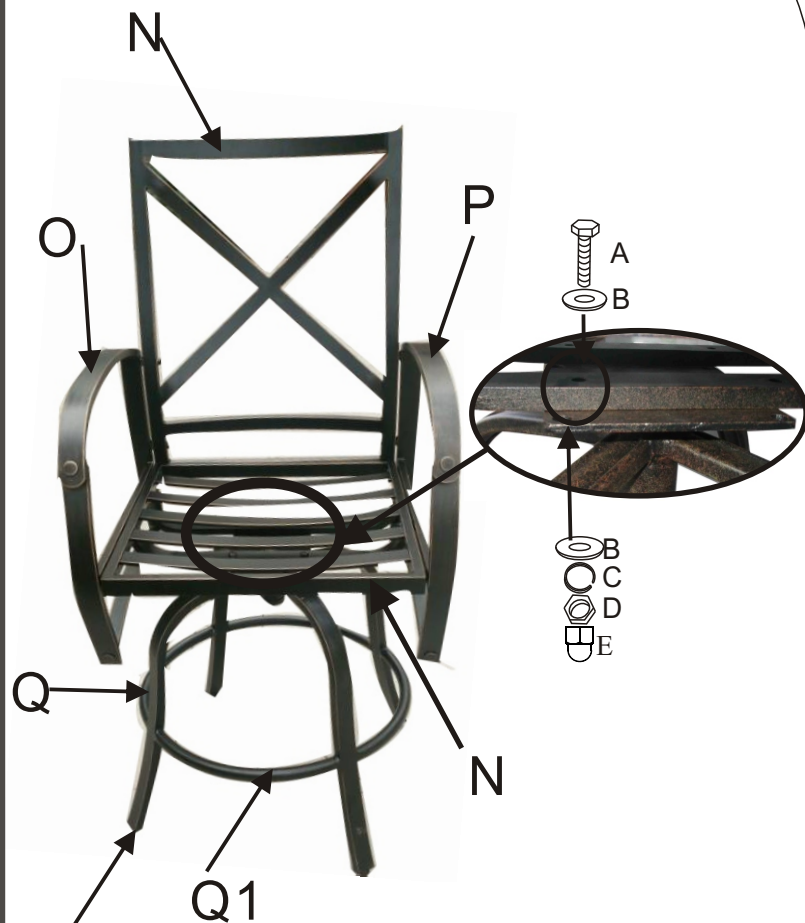

R : These part have been assembled by factory already.

1. Before removing all protective packing material and position base on floor, Loosely attach the back frame(N) and the seat frame (M) on the left arm(O) with bolt(F&G),flat washers(H), lock washer(I), and PVC cover(J).
2. Loosely attach the right arm(P) to the seat and back frame with bolt(F&G),flat washers(H),lock washer(I), and PVC cover(J). DO NOT tighten the nuts.
3. Place the base on a flat, solid surface.Loosely attach the seat to the base.Please using screws(A), flat washers(B), lock washers(C), nuts(D) and nut caps(E).
- 4.Tighten all the bolts and nuts completely.
Use the adjuster feet to level the legs.
5. Put Cushion(S&S1) on the unit(as shown in the picture).

Warning : DO NOT use acid or alkaline washing liquid to clean the product.



*** DO NOT OVER TIGHTEN**

*** NO SOCKET DRIVERS**



Made in China

*** NO POWER TOOLS**

