

## SPECIFICATION SHEET

### BPL - 304

#### Fixture Specifications:

**Housing:** Cast Brass

**Stem:** Die-cast brass stem, with ½ NPT hub on bottom

**Finish:** Available in BRZ- Antique Bronze

**Socket:** G4 Bi-Pin socket

**Lamp:** 12V, JC Bi-Pin bulb 20W standard, 20W Max  
LED lamps available in 3W, with  
2700K-warm white color temperature.

#### •Area Lights


#### •Brass

**Wiring:** Fixture is prewired with a 3ft 18-2 direct burial cord. Wire nuts sold separately.

**Mounting Spike:** Black 8½" ABS spike with ½" NPT male hub on top

**Electrical Notes:** A 12V transformer is required.  
Voltage range for 12V halogen lamps are 11V-12.5V  
Voltage range for LED lamps are 8V-21V.  
Proper grease/lubricant is suggested on threaded parts during installation process.

**Warranty:** Limited five (5) year warranty on fixture housing and stem against manufacture's defects.

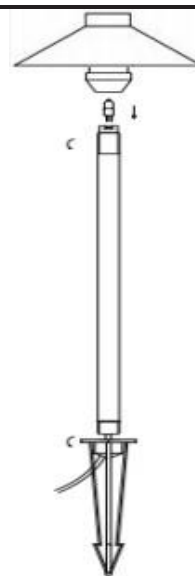

#### AVAILABLE LED LAMPS

LAMP NUMBER	BEAM		LUMEN	COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
	WATTS	SPREAD				
LED3WG412V	3	360°	270	2700K	30000	20 Watt

#### AVAILABLE HALOGEN LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN		
J C10W	10	360°	75	2700K	2000
JC20W	20	360°	190	2700K	2000

