



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Pearl LED Vanity PRLV Series

Features

Sleek contemporary styling with die-cast metal backplate.
Can be mounted up or down. Provides lighting in residential, commercial and hospitality applications. Fixture mounts to standard junction box (not included).

Construction

Back plate is die-formed gauge steel. Power supply connections must be made inside a junction box (not included).

Finish

Black, Satin Brass or Satin Nickel.

Diffuser

White glass diffusers.

Electrical

Input 120 VAC 60 Hz.
Compatible with residential TRIAC and ELV dimmers..

LED

Integrated LED modules capable of producing:
14W = 1185 delivered lumens
21W = 1565 delivered lumens
3000K (CCT) rated for 50,000 hrs., 90 CRI.



Certification

All fixtures are cETLus listed for indoor damp locations.
Title 24 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 year from date of purchase.

Specifications and dimensions
subject to change without notice.

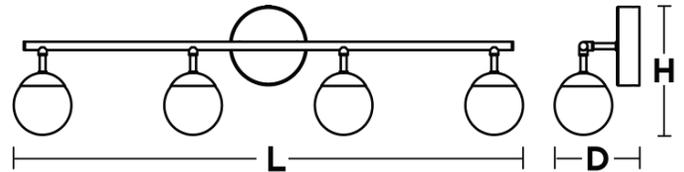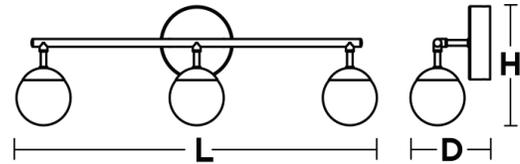

Ordering Information:

Black	Satin Brass	Satin Nickel	LED	Delivered Lumens	CCT	L	H	D
PRLV2408L30D1BK	PRLV2408L30D1SB	PRLV2408L30D1SN	14W	1185	3000K	24"	7-1/2"	5-1/2"
PRLV3208L30D1BK	PRLV3208L30D1SB	PRLV3208L30D1SN	21W	1565	3000K	32"	7-1/2"	5-1/2"