

#### Features

- Fixture-mount design.
- Includes 1.5 V AA batteries.

#### Material

- Brass construction.

#### Technology

- Electronic infrared sensor with WAVE technology for accurate activation.
- Slow-closing piston technology.

#### Installation

- Intended for urinal installations with 3/4" spud coupling connection.

#### Optional Products/Accessories

GP1118986 Flushometer Extension Kit



ADA

CSA B651

OBC

#### Codes/Standards

ASME A112.18.1/CSA B125.1  
CSA B64  
ASSE 1037/ASME A112.1037/CSA B125.37  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes


*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



|    |                 |
|----|-----------------|
| CP | Polished Chrome |
|----|-----------------|

\*10-3/4" (273 mm) minimum with a  
6" (152 mm) critical level above the fixture

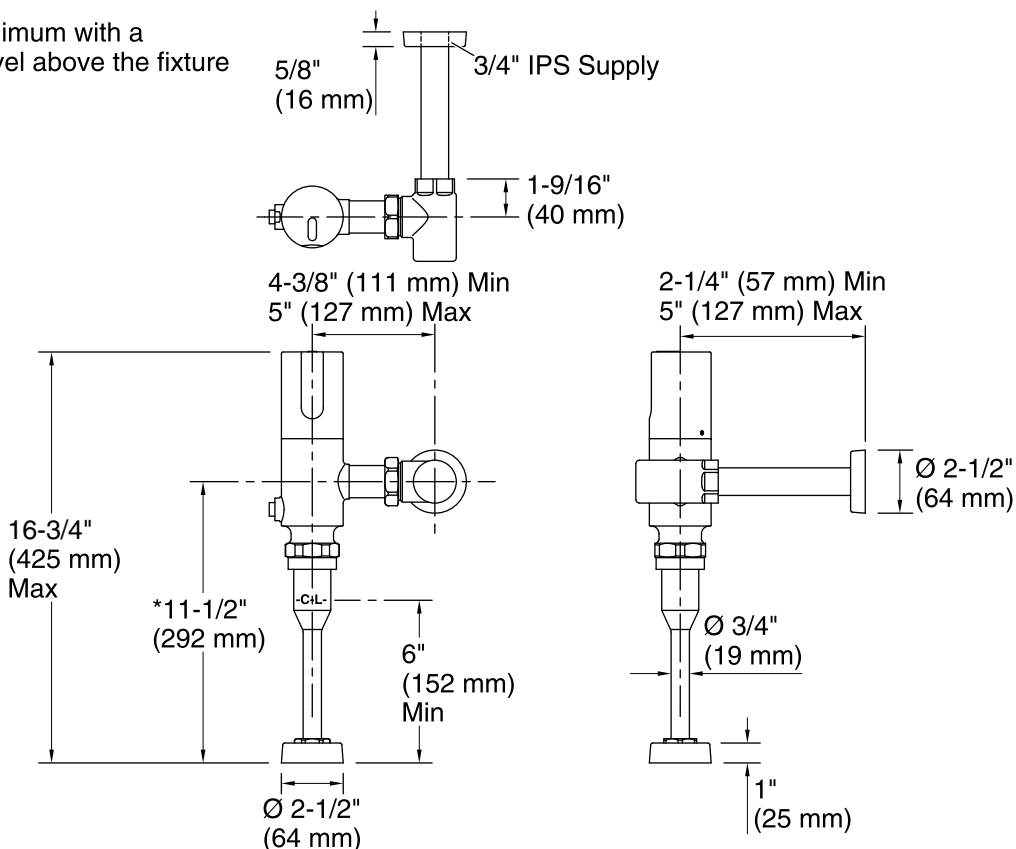

#### Technical Information

All product dimensions are nominal.

Power source: Battery - DC, included

Fixture pressure max 80 psi (551.6 kPa)  
(static):

#### Pressure and Supply Requirements

##### Fixture Supply Requirements

Max static pressure: 80 psi (551.6 kPa)

Min flowing pressure: 25 psi (172.4 kPa)

Min flow rate: 10 gpm (37.9 lpm)

#### Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.