

SPECIFICATION SHEET

BPL-106

Fixture Specifications:

Housing: Solid cast brass

Swivel: Solid cast brass swivel, with ½ NPT hub on bottom.

Finish: BRZ- Antique Bronze

Socket: GU5.3 socket

Lamp: 12V, MR16 halogen bulb 20W standard, 50W Max. LED lamps available in 3W/6W/9W, with 2700K-warm white color temperature.

• Directional Lights


• Brass

Wiring: Fixture is prewired with a 3ft 18-2 direct burial cord. Silicone filled wire nut BPL-80 available from BestProLighting.com Wire nuts sold separately.

Mounting Spike: Black 8½" ABS spike with ½" NPT male hub on top

Electrical Notes: A 12V transformer is required. Options are available from BestProLighting.com Voltage range for 12V halogen lamps are 11V-12.5V Voltage range for LED lamps are 8V-21V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited five (5) year warranty on fixture housing and and stem against manufacture's defects.

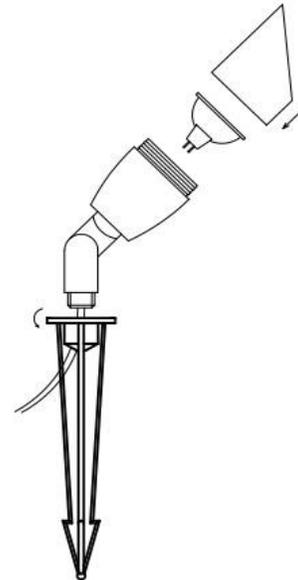

AVAILABLE LED LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
3WMR16LED 3		45°	270	2700K	50000	20 Watt
6WMR16LED 6		45°	540	2700K	50000	35 Watt
9WMR16LED 9		45°	810	2700K	50000	50 Watt

AVAILABLE HALOGEN LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN		
MR16 20W 20	20	36°		2700K	2000
MR16 35W 35		36°		2700K	2000
MR16 50W 50	50	36°		2700K	2000

For additional lamps and accessories, visit bestprolighting.com

