

Brisa 2000

Designed For Ultimate Versatility

Like celestial bodies gracefully orbiting in the night sky, the Brisa Ceiling Fan brings movement, elegance, and function together in perfect harmony. Its lunar-inspired counterweight revolve effortlessly around a striking spherical gear housing, creating a mesmerizing 360° motion. The fan head adjusts within a 180-degree arc, allowing for precise, optimized airflow. The steeper the tilt, the faster the axial rotation, offering a dynamic yet controlled breeze tailored to your comfort. The Brisa enhances the efficiency of heating and air conditioning, circulating air with effortless sophistication. Crafted from cast aluminum, heavy spun, and stamped steel, this masterpiece of design and engineering is built to last—and backed by a limited lifetime warranty.





B2K-BK-MTL Matte Black Finish with Metal Blades

FAN FINISHES

Standard Finishes

Metal Blades









Matte Black Brushed Nickel

Blade Finishes Solid Wood




All Swatches See Page 138

BRBR Brushed Brass **BRCP Brushed Copper** PB Polished Brass CR Polished Chrome CP Polished Copper CRDAMP Polished Chrome Damp

BNDAMP Brushed Nickel Damp Gloss White WH Agua Marinha LTBLUE LTPURPLE Ametista BKN Black Nickel **GREEN** Esmeralda

Rubi RED **BLUE** Safira

TECHNICAL SPECIFICATIONS

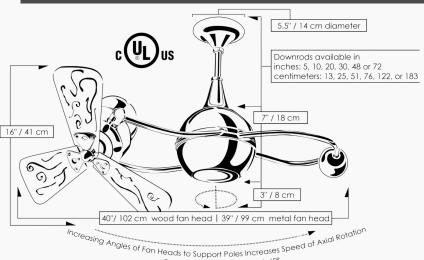

SKU BUILDER

B2K-XXXX-XXX (Model+Finish+Blade)

PRODUCT FEATURES

AC AC Motor



Wall Control

360° Rotation



(*) Unipack Shipping







FAN FEATURES

Fan Weight 21 lbs **Voltage** 110 or 220 Downrod Lengths inches: 5, 10, 20, 30,

48, 72

centimeters: 13, 25, 51, 76, 122, 183 Field cuttable, Non-threaded

Downrod Diameter 0.75 inch

Overall Drop 10 inches / 25 cm + downrod length

Fan Diameter

Solid Wood - 40 inches / 102 cm Metal with Guard - 39 inches / 99 cm

Fan Blade Diameter

Solid Wood - 16 inches / 41 cm Metal with Guard - 13 inches / 33 cm

MOTOR FEATURES

Motor Type AC

Ambiance Soothing White Noise Safety Certification UL / CUL Warranty Limited Lifetime

DOE MOTOR EFFICIENCY DATA

Guard Options

Wood - No Cage Option

Metal - Safety Cage or Decorative Cage

RPM (Low/High) **Wood** - 866 / 1363

CFM/Watt (High) **Wood** - 45

Metal - 790 / 1205 CFM (Low/High)

Metal - 23 **Blade Pitch**

Wood - 1602 / 2376 **Metal** - 790 / 1265

Wood - 19° Metal - 31°

Watts (High) **Wood** - 52.44 **Metal** - 55.15

STANDARD EQUIPMENT

Downrod 10in / 25cm **Flat Ceiling Canopy**



Wall Control Requires three-wire system

- 3-speed

- Oscillation On/Off

*For more information see accessory page. 132

118 matthewsfanco.com