

bruck

DELFINA

Canopy, Track LED E26

WE PLIGHT
^ COLLECTION



FEATURES

- Designed, handcrafted, and painted by Master Artisans
- Made to order, eliminating waste
- 6 wood stains + 11 colors to mix & match
- Traditional E26 socket or range of LED options. 3000K, 3500K, & Warm Dim 3000K, dim to 1800K

HOUSING

- Composed of recycled, locally sourced reconstructed wood veneer
- USA factory assembled shades with some exceptions due to size
- Due to hand-crafted nature, colors may vary from fixture to fixture and from photo

MOUNTING

- Delfina 60 & 80 : Bayonet canopy with 108" cord, field adjustable
- Delfina 100, 160 & 220: Air craft cable suspension with black canopy and 108" black cord, field adjustable.
- Optional track mounting options: Global Trac Systems, GEO track, ECO track / HALO® track, and Zonyx track.
- Delfina 60: 1.65 lbs.
- Delfina 80: 4.34 lbs.
- Delfina 100: 5.13 lbs.
- Delfina 160: 12.12 lbs.
- Delfina 220: 40.8 lbs.

LISTING

- ULus listed to UL1598 (suitable for indoor use and dry locations only)
- cUL listed to CSA C22.2 #250.0

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

ORDERING CODE

SERIES	WEP	wood shade
TYPE	DEL	delfina
SIZE	60 80 100 ¹ 160 ^{1,2} 220 ^{1,2}	60 pendant, 1 x light source 80 pendant, 1 x light source 100 pendant, 1 x light source 160 pendant, 1 x light source 220 pendant, 3 x light source
LIGHT SOURCE	LLED LE26 ³	LED, 1000 lm E26 socket
CCT	30K 35K 3018	3000K, standard white LED 3500K, standard white LED 3000K, dim to 1800K, warm dim LED Not applicable to LE26 option. Do not include in LE26 ordering code.
CRI	90 ⁴ 95 ⁵	90 CRI, standard white 95 CRI, warm dim Not applicable to LE26 option. Do not include in LE26 ordering code.
MOUNTING OPTION	PBK PWH PMC ECOHBK ECOHWB ECOHMC ECOJBK ⁶ ECOJWH ⁶ ECOJMC ⁵ GEOBK GEOWH GEOHC ZONMC	canopy, black with black cable canopy, white with white cable canopy, matte chrome with black cable ECO/HALO black with black cable ECO/HALO white with white cable ECO/HALO matte chrome with black cable JUNO black with black cable JUNO white with white cable JUNO matte chrome with black cable GEO black with black cable GEO white with white cable GEO matte chrome with black cable Zonyx matte chrome with black cable
OUTER SHADE COLOR	ASH BCH BLU EBY GRN GYO OCH PGR PTB RED ROS TRC WHT WNG YLW LPT VLT	ash beech blue ebony green grey oak ocher pale green petiribi red rose teracotta white wenge yellow light petrol violet
INNER SHADE COLOR	ASH BCH BLU EBY GRN GYO OCH PGR PTB RED ROS TRC WHT WNG YLW LPT VLT	ash beech blue ebony green grey oak ocher pale green petiribi red rose teracotta white wenge yellow light petrol violet

ORDERING CODE

Follow the steps to specify your fixture, example:

WEP - DEL - 80 - LLED - 35K - 90 - PWH - YLW - ASH

NOTES

1. 100, 160 & 220 available in PBK and PWH mounting only.
2. Assembly required.
3. 15W E26 socket available, use base option code LE26-15.
4. 90 CRI for standard white only.
5. 95 CRI for warm dimming only.
6. Not available with LLED.

COLOR OPTIONS




PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

LIGHT SOURCE

Light Source	LLED - Static White LED	LLED - Warm Dim LED	LE26 - E26 Socket
Performance			
LED	Cree CMT 1420	Luminus CDM-9	Lamp Dependant
Lumens	1150 lm	850 lm	
CCT	3000K or 3500K	3000K to 1800K	
SDCM	2-Step MacAdam Ellipse	3-Step MacAdam Ellipse	
CRI	>90	>95	
Lumen Maintenance	L ₉₀ > 41,500 hours	L ₇₀ > 54,000 hours	
Technical Specs			
Socket Listing	Integrated LED module ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0 and #9.0	Integrated LED module ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0 and #9.0	Medium E26 base socket ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0 and #9.0
Mounting			
Canopy	120-277Vac, 50/60Hz input 14.3W, 14.9VA Tri-mode dimming (Triac, ELV and 0-10V)	120-277Vac, 50/60Hz input 15.6W, 16.1VA Tri-mode dimming (Triac, ELV and 0-10V)	120Vac input 100W, 100VA (max 100W lamp) Dimmable (with compatible lamp)
Line Voltage Track	120Vac, 50/60Hz input 14.3W, 14.9VA Triac and ELV phase dimming Connects to line voltage adapter (ECOH, GEO, Zonyx)	120Vac, 50/60Hz input 15.6W, 16.1VA Triac and ELV phase dimming Connects to line voltage adapter (ECOH, GEO, Zonyx)	120Vac input 100W, 100VA (max 100W lamp) Dimmable (with compatible lamp) Connects to line voltage adapter (ECOH, ECOJ, GEO, Zonyx)
Warranty			
	5 year limited fixture warranty	5 year limited fixture warranty	1 year limited fixture warranty


CCT AT LIGHT LEVEL (%LF) FOR WARM DIM LED	
%LF	CCT
100%	3000
50%	2800
25%	2300
10%	1900
5%	1800

WARM DIM DIMMING CURVE
CCT RANGE: 3000K TO 1800K

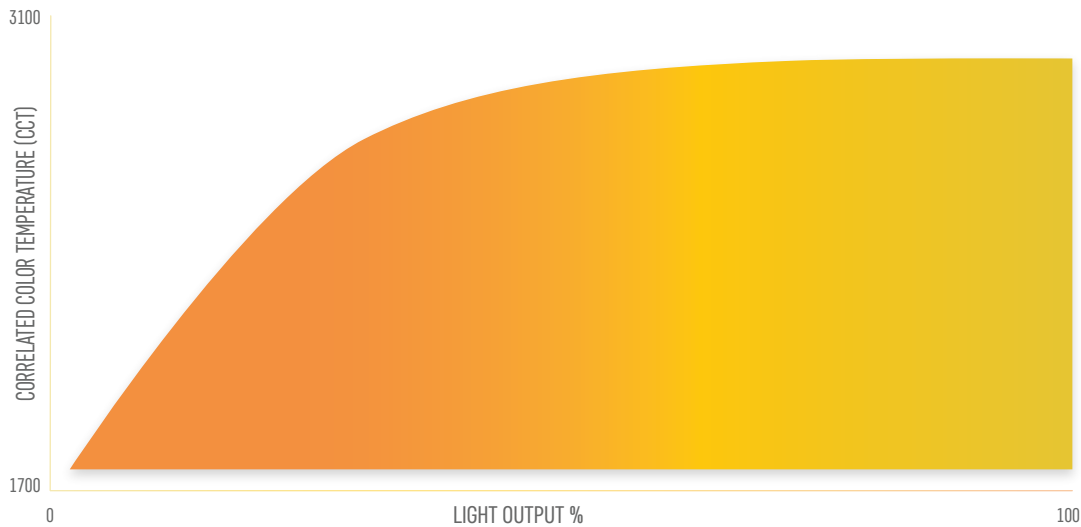


PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			


MOUNTING OPTIONS




DELFINA 60





DELFINA 80





DELFINA 100

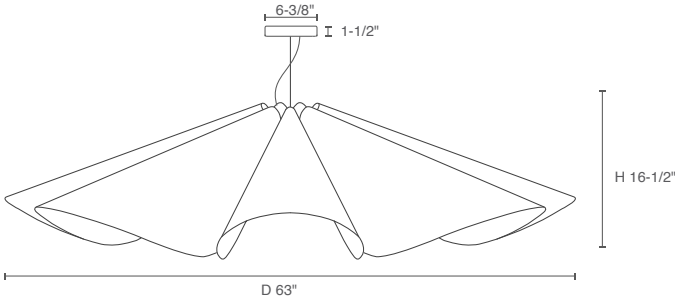

DELFINA 160

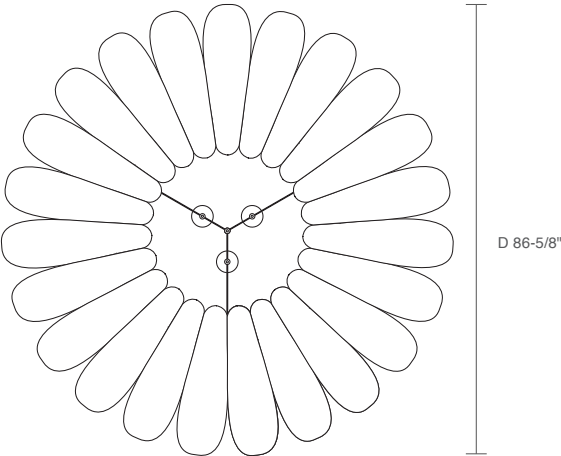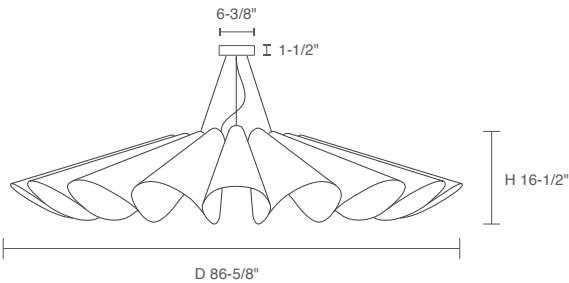


DELFINA 220

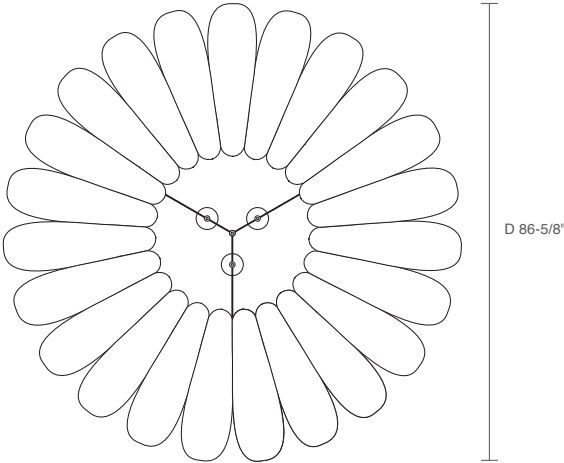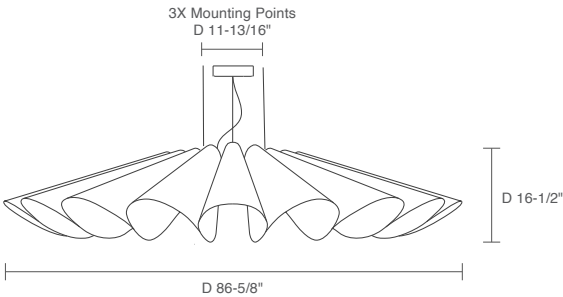


DELFINA 220 LLED

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			


MOUNTING OPTIONS




LLED-ECOH




LLED-GEO




LLED-ZONMC



LE26-ECOH/ECOJ



LE26-GEO



LE26-ZONYX