


KATORI TRIPLE FUNCTION OUTDOOR SHOWER INSTALLATION MANUAL

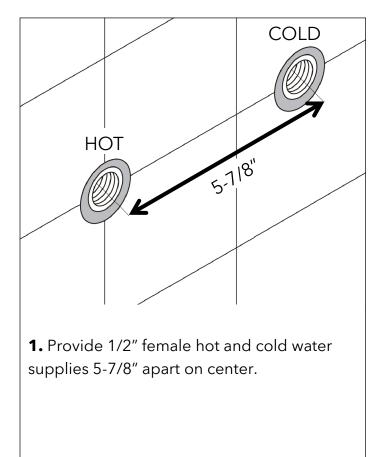


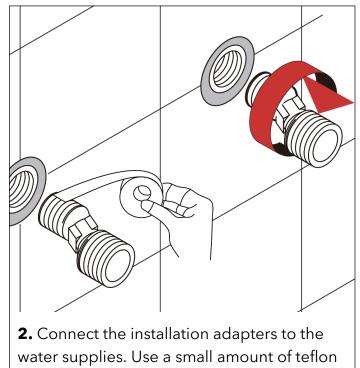


tape to ensure a watertight seal.

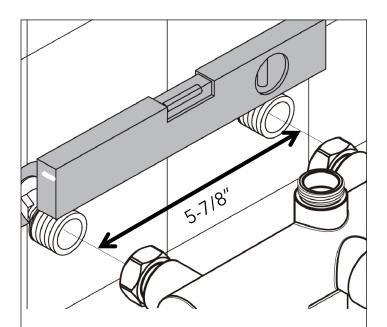


3. Adjust the adapters so they are level and exactly 5-7/8" apart on center.

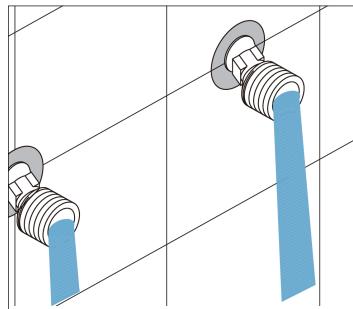

4. Turn the water on for several minutes to flush the supply lines. This will prevent dirt and impurities from entering the cartridge and reducing water pressure.

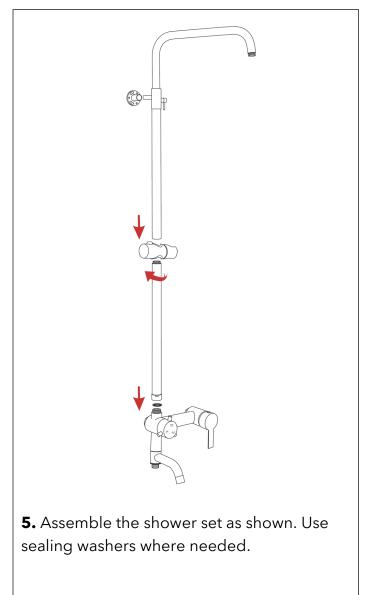

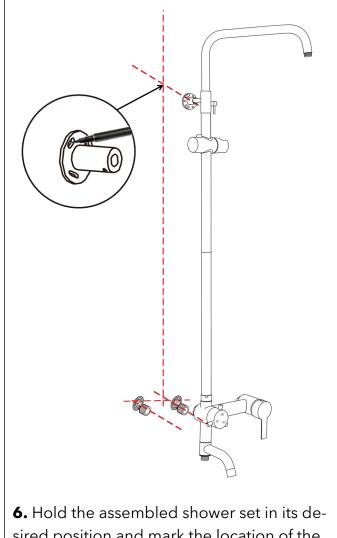

sired position and mark the location of the mounting bracket.

