

# ASSEMBLY INSTRUCTIONS KBC-HSK42

- -Please Unpack all parts and check against parts list on this instruction sheet before discarding the packaging.
- Note: We recommended at least 2 people assist in installation to avoid injury or damage to the product.

#	Part Description	Dimension	QTY
1	Floating vanity	1067x560x580mm	1 (PC)
2	Wooden Hanger	220x50x20mm	
3	Plywood panel	945x160x18mm	1 (PC)

RTA hardware				
#	Drawing	Description	QTY	
Α	<b>—</b>	Long screws(Ø8x50mm)	15 (PCS)	
В	-	Short screws(Ø8x35mm)	18 (PCS)	


#### Tools


. Screwdriver,drill,hammer...(not included)

## Assembly Instructions

#### Step 1:

- Hold the plywood panel (3) against the wall and align the screw holes with your stud locations.
- Use a writing untencil to mark the location.
- See Figure 1 for recommended mounting height
- Use long screws (A) and drive them through the plywood panel to secure.







### Step 2:

- Use short screws (B) to attach the wooden hanger (2) to the plywood panel (3).

- Use Figure 2 as reference for mounting height.







Step 3:

- Hang the vanity (1) on the wooden hanger (2).

- Use Figure 3 as reference for recommended final mounted height.



Vanities 42

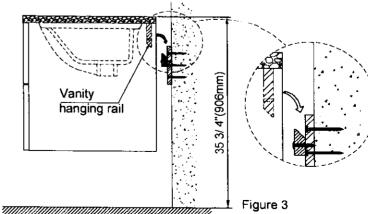

www.Kitchenbathcollection.com


1 of 2



# ASSEMBLY INSTRUCTIONS KBC-HSK42


#### Step 4:

- Remove the middle drawers by pulling on the drawer, and pushing the locking device at the same time. See Figure 4.




#### Step 5:

- Drive short screws (B) through the two holes located on the vanity hanging rail. See Figure 5.




The middle drawer has been removed, to facilitate short screw (B) installation



### Step 6:

Figure 5

- Fully extend the slide rail out. See Figure 6.
- Place the drawer onto the slide rails. See Figure 7.
- To secure the drawer, close until a series of clicks are heard. See Figure 8.

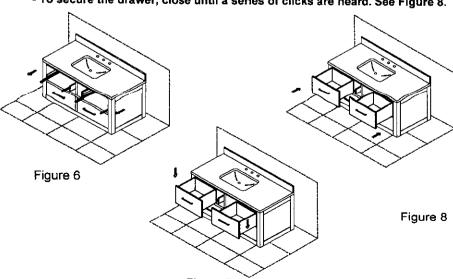




Figure 7

www.Kitchenbathcollection.com

2 of 2