


Description

Indoor commercial LED linear fixture. Minimalistic and attractive design with high quality light output. Available in variety of color temperature options. The fixture comes with suspension cables and surface mounting brackets. The RTS series fixtures ship the following business day after the purchase.

Dimming

0-10v dimming is a standard dimming that requires 0-10v capable dimmer/switch and additional wiring. Bluetooth, DALI, DMX control is available for custom orders. Please contact the Centerlight for other questions and compatible dimmer/switches.

Body color

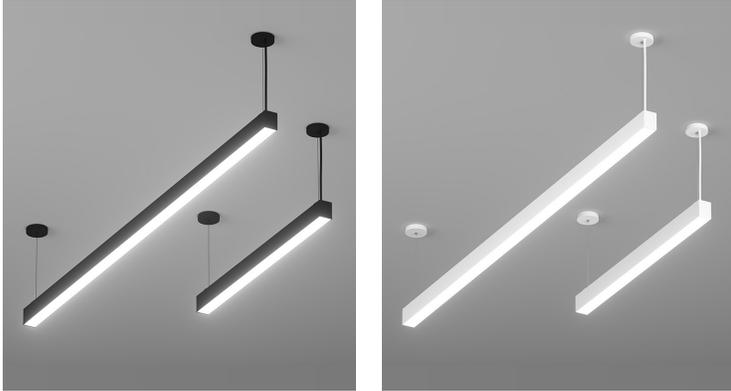


Performance per fixture




Model:	RTS-4	RTS-8
Dimensions:	48" x 2.72" x 3.5"	96" x 2.72" x 3.5"
Total lumens:	4000 Lm	8000 Lm
Total watts:	40 W	80 W
Efficacy, CRI:	100 Lm/W, CRI: 95	
Input:	110/277 VAC	

Types of Installation

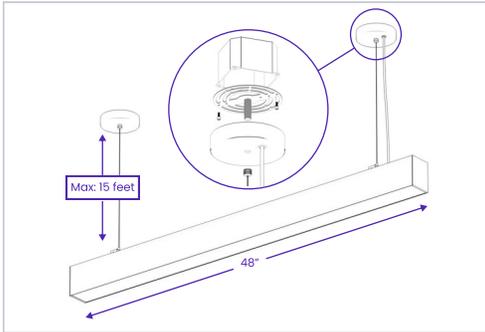


J-BOX mount

Is a standard installation type for the RTS fixture. Each canopy set includes all the necessary hardware for j-box installation. The maximum length of the aircraft and power cables is 15 feet. Ideally fits on 3.5" and 4" octagon/square j-box.

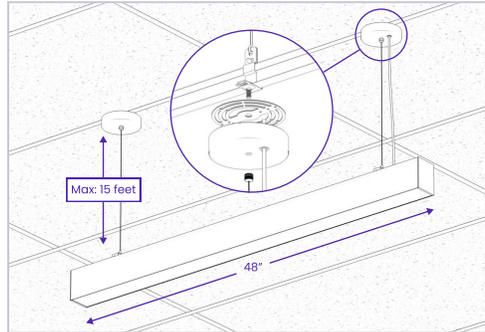

T-Clip (for drop ceiling)

Is an optional hardware bracket for suspended ceilings that allows RTS fixture suspension directly on the T-grid. T-clip fits on a 15/16" grid, and it comes as a set of two brackets per fixture.

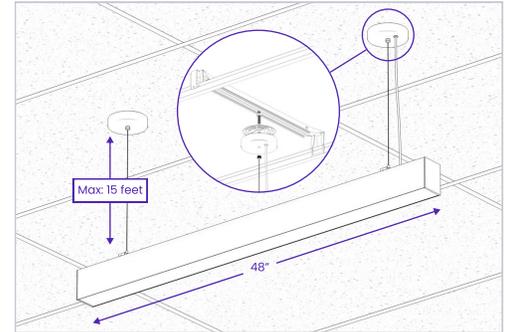

T-Support (for drop ceiling)

Is an optional hardware bar for suspended ceilings installations that allows RTS fixture suspension through the panels and between the T-grids. It is fully adjustable for symmetric/asymmetric fixture positioning.

Ordering guide

Sample: RTS-4-W-3000-EM-TS

Model:	RTS-4 / RTS-8	
Finish:	B-Black / W-White	
Color temp:	3000 / 3500 / 4000	
Emergency:	EM - built in 90 min battery	
Mouting type:	TS-T-support / TC-T-clip / J-j-box mount	

3D REVIT FILES (RFA)



PHOTOMETRIC (IES)



INSTALATION MANUAL

