



ALINA 12

120V PENDANTS

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

Cable-hung or stem-mount pendant with handcrafted glass diffuser.

LAMPING

LED: 9W Replaceable source, 120V, dimmable, 80+ CRI, 3000°K CCT, 800 lumens, 30,000 hours, lamp included.

SHADE

Shade shall be handcrafted glass of various decors. 11.8" Dia. x 11.8" H

SUSPENSION

Cable-hung: 1x 10' aircraft-quality stainless steel cable support with 10' AWM type cord. Jacket tint coordinates with metal finish. 5" Dia. canopy is plated stamped steel. Bronze or Satin Nickel.

Stem-mount: 4 connectable stem sections (3", 6", 12" and 18" lengths) plus telescoping piece for up to 3" adjustment, 10' max. 5" Dia. canopy (with swivel) and stem sections are plated steel. Bronze or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.


LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

Consult factory concerning lower wattage labeling for energy requirements.



GOLD FOIL (ALINA12GF) SHOWN WITH STEM OPTION & SILVER FOIL (ALINA12SF)

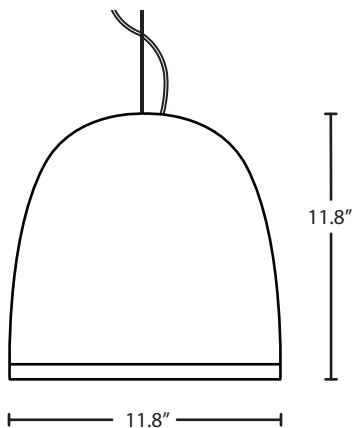

Project Information:

For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 3/18



ORDERING:


CONNECTION	-	GLASS OPTIONS	-	LAMP OPTIONS	-	METAL FINISH
1x Cable Fixture		ALINA12GF Gold Foil		LED 9W LED		BR Bronze
1KZ 1 Lt. Flat		ALINA12SF Silver Foil				SN Satin Nickel

Stem Fixture
1TT 1 Lt. Flat

Ex. 1KZ-ALINA12SF-SN
Alina 12 Pendant, Silver Foil Shade,
Satin Nickel Finish


PENDANT OPTIONS:

CABLE-HUNG PENDANT



- 10' aircraft-quality stainless steel cable
- 1KZ Series: 1x lampholder
- Cord: 10' AWM-type provided
- Bronze or Satin Nickel

STEM PENDANT



- Swivel at canopy, suitable for sloped ceilings
- Includes telescoping section plus 4 connectable stem sections, (1x 3", 1x 6", 1x 12", 1x 18"), 10' max
- Bronze or Satin Nickel

ACCESSORIES:

ADDITIONAL STEM SECTIONS:

Additional connecting stems are available to increase overall length, up to 10' max. Telescoping adjustable section allows up to 3" movement.

T20A-SN or T20A-BR	Adj. Section
T203-SN or T203-BR	3" Section
T206-SN or T206-BR	6" Section
T212-SN or T212-BR	12" Section
T218-SN or T218-BR	18" Section

Project Information: