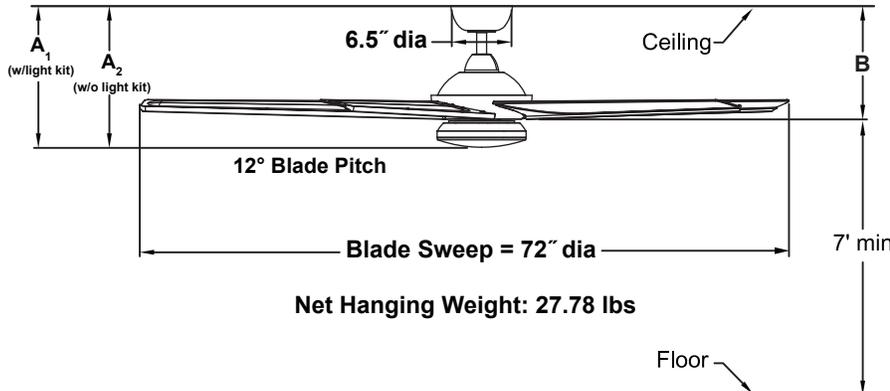


SUBTLE™**FPD6236B**
72" Ceiling Fan**

| | A ₁ | A ₂ | B |
|--------------------|----------------|----------------|--------|
| Fan w/4.5" downrod | 14.63" | 14.63" | 11.90" |
| Fan w/12" downrod | 22.13" | 22.13" | 19.40" |
| Fan w/18" downrod | 28.13" | 28.13" | 25.40" |
| Fan w/24" downrod | 34.13" | 34.13" | 31.40" |
| Fan w/36" downrod | 46.13" | 46.13" | 43.40" |
| Fan w/48" downrod | 58.13" | 58.13" | 55.40" |
| Fan w/60" downrod | 70.13" | 70.13" | 67.40" |
| Fan w/72" downrod | 82.13" | 82.13" | 79.40" |

Available Finishes

| | |
|----|---|
| BN | Brushed Nickel with bourbon Blade and Opal Frosted Glass / Steel Cap |
| DZ | Dark Bronze with bourbon Blade and Opal Frosted Glass / Steel Cap |
| GR | Matte Greige with Weathered Wood Blade and Opal Frosted Glass / Steel Cap |

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

158 x 22 sensorless DC motor is designed for optimal performance with this fan.

BLADES:

A set of five 33" blades in plastic with aluminum trim materials.

CONTROL OPTIONS:

TR205 hand-held remote control is included. Push button remote control with variable fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206 wall control and WFR6236 receiver are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 18-watt dimmable LED.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

Airflow / Energy Efficiency Info (120V)

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 92 | 8197 | 204 | 0.49 | 40 |
| Med | 60 | 5464 | 546 | 0.14 | 10 |
| Low | 29 | 2487 | 777 | 0.05 | 3 |

Light Bulb Information (120V)

| Bulb Type | Watts | QTY | Lumens Amount | Color Temp | CRI |
|-----------|-------|-----|---------------|------------|-----|
| LED | 18 | 1 | 1400 | 3000 | 90% |

Energy Guide FTC

| Power (W _{ave}) | Total Air Delivery (CFM _{ave}) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|---------------------------|--|-----------------------------------|--------------------------------|
| 23 | 3361 | 6 | 148 |