


Assembly Instruction

BAR STOOL

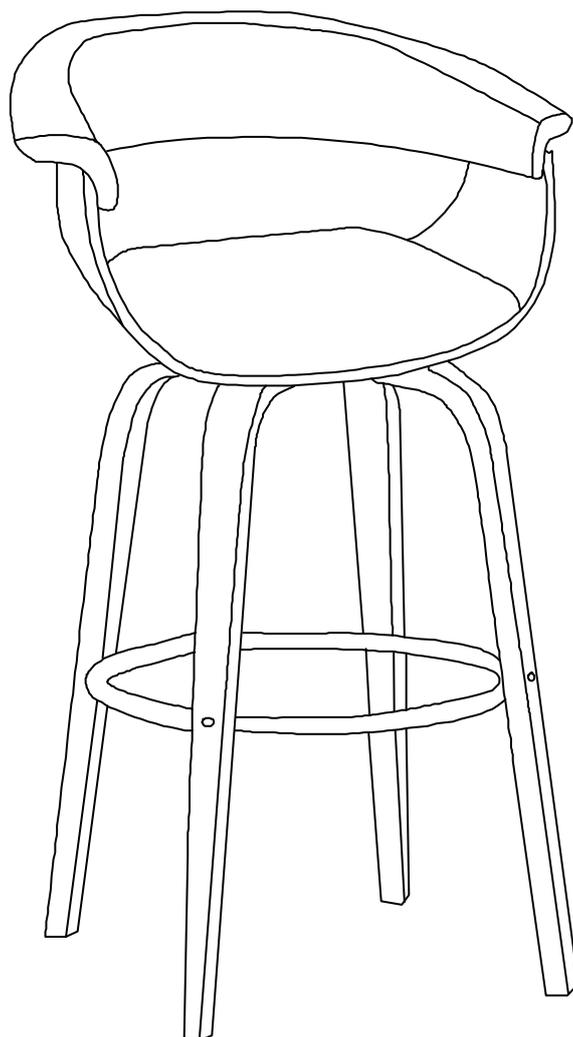

Carefully unpack and identify each component before beginning assembly. Before you begin, please refer to parts list to make sure that you have all parts. Please take care when assembling the unit and always place the parts on a clean, soft surface.





Get social with us and discover more about our products, tips and exclusive discounts!



PRE-ASSEMBLY PREPARATION


- **CAUTION:** Assembly will require at least 2 adults. DO NOT use power tools. Please inspect all items BEFORE assembly. If for any reason you need to return this item, please kindly return it in it's original packaging.
- **WARNING!**
 1. DO NOT let any sharp objects touch or rub the surface of the product.
 2. When assembling, do not let children play around the working area.
 3. DO NOT tighten all bolts and screws completely until the entire unit has been assembled and set up.
 4. DO NOT USE if this product become damaged, and/or components are broken or missing.
- **CARE AND CLEANING:** DO NOT scratch or chip the finish. DO NOT use abrasive chemicals for cleaning. Clean with mild soap on a soft rag. Rinse and dry thoroughly.
- **MAINTENANCE:** Please periodically check all fittings and re-tighten as necessary.

PARTS LIST

<p>SEAT (A)</p>  <p>Qty: 1</p>	<p>LEG (B)</p>  <p>Qty: 4</p>	<p>FOOTREST (C)</p>  <p>Qty: 1</p>	<p>CONNECTION (D)</p>  <p>Qty: 1</p>
<p>ROTATING SHAFT (E)</p>  <p>Qty: 1</p>			
<p>HARDWARE LIST (1 set in a plastic bag)</p>			
<p>LONG BOLT (F) M6 x 25MM</p>  <p>Qty: 4</p>	<p>MEDIUM BOLT (G) M6 x 20MM</p>  <p>Qty: 10</p>	<p>SHORT BOLT (H) M6 x 16MM</p>  <p>Qty: 2</p>	<p>WASHER (I)</p>  <p>Qty: 2</p>
<p>CAP (J)</p>  <p>Qty: 4</p>	<p>ALLEN KEY (K)</p>  <p>Qty: 1</p>		


STEP 1

Use Connection (D), Medium Bolt (G) and Allen Key (K) to fix four Legs (B), then attach Footrest (C) to the legs by using Long Bolt (F) and Allen Key (K) as shown in below diagram.

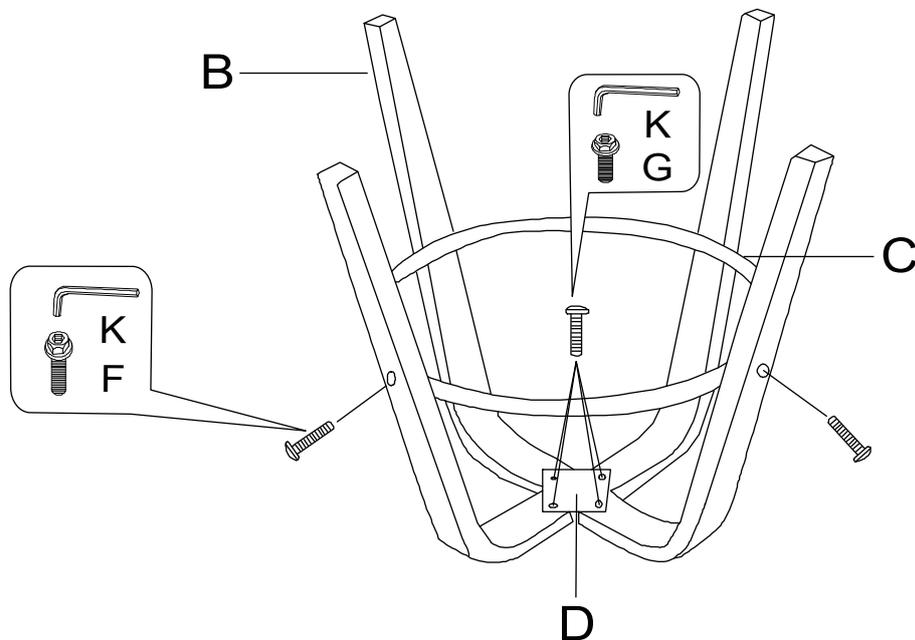


STEP 2

Attach Rotating Shaft (E) to the leg frame by using Medium Bolt (G) and Allen Key (K) as shown in below diagram.

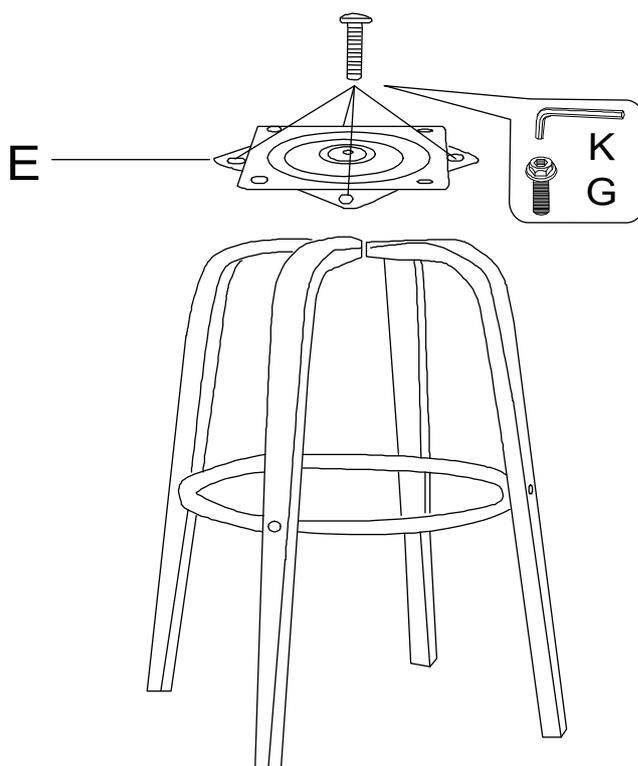

STEP 3

Attach Rotating Shaft (E) to the Seat (A) by using Medium Bolt (G), Washer (I) and Allen Key (K) from the front side, using Short Bolt (H) and Allen Key (K) from the back side as shown in below diagram.

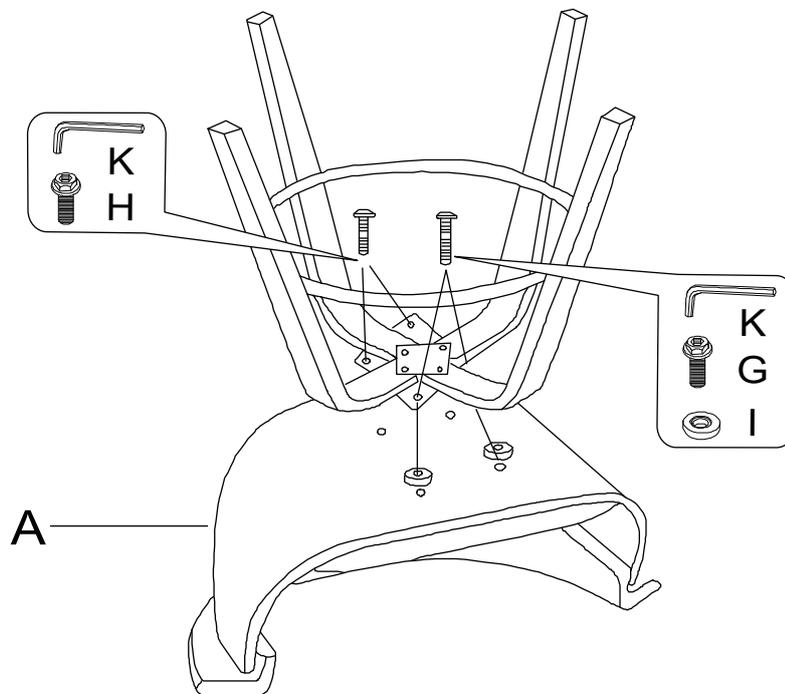

STEP 4

Please use the Cap (J) to cover the holes of bolts as shown in below diagram. After initial assembly, the product may acclimate to its new environment. Please ensure all screws are still securely tightened.

