



















# ASSEMBLY INSTRUCTIONS

(For LD777-11)

Parts List				
Pieces	Schema		Description	QTY
A			Screw	4
B			Flat washer	4
C			Lock washer	4
D			Nut	4
E			Alu plate	4
F			Nut cap	4
G			Wrench	1
H			PE cap	Factory already assembled
I			Seat	1
J	1		Base	1
	2		Alu plate	2
	3		Spring plate	2
	4		Screw	4
	5		Flat washer	4
	6		Lock washer	4
	7		Nut	4
	8		TR	1
K			Seat Cushion	1



## WARNING!

- This chair has a 250 lbs weight capacity.
- Hang cushion over chair frame to dry if it gets wet to prevent mold/mildew.

## ATTENTION:

1. Please read these instructions carefully before assembly.
2. Aluminum is soft metal over tighten may strip threads or break the part.
3. DO NOT use power tools.
4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

# ASSEMBLY INSTRUCTIONS

(For LD7008C-60\*108)


## ATTENTION:

1. Please read these instructions carefully before assembly.
2. Aluminum is soft metal over tighten may strip threads or break the part.
3. DO NOT use power tools.
4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

## Assembly step:

1. Turn the table top(A) upside down on the soft clean surface.
2. Loosely attach the legs(C,D) to the table top with bolts(E&E1),big flat washers(F),big lock washer(G), nut(H) and nut cap(I).DO NOT tighten the nuts.
3. Loosely attach each of the center plate(B1&B2) to the legs. Note that the recessed end of each plate goes on the leg Last at each corner. Secure using small flat washers(K), small lock washers(L), bolts(J) and PVC covers(M).Loosely attach the support(O) to the center plate with small flat washers(K), bolts(J1),lock nut(N), nut cap(P) and PVC covers(M)
4. Turn the table onto its legs. Use the adjuster to level the table.

Warning : DO NOT use acid or alkaline washing liquid to clean the product.

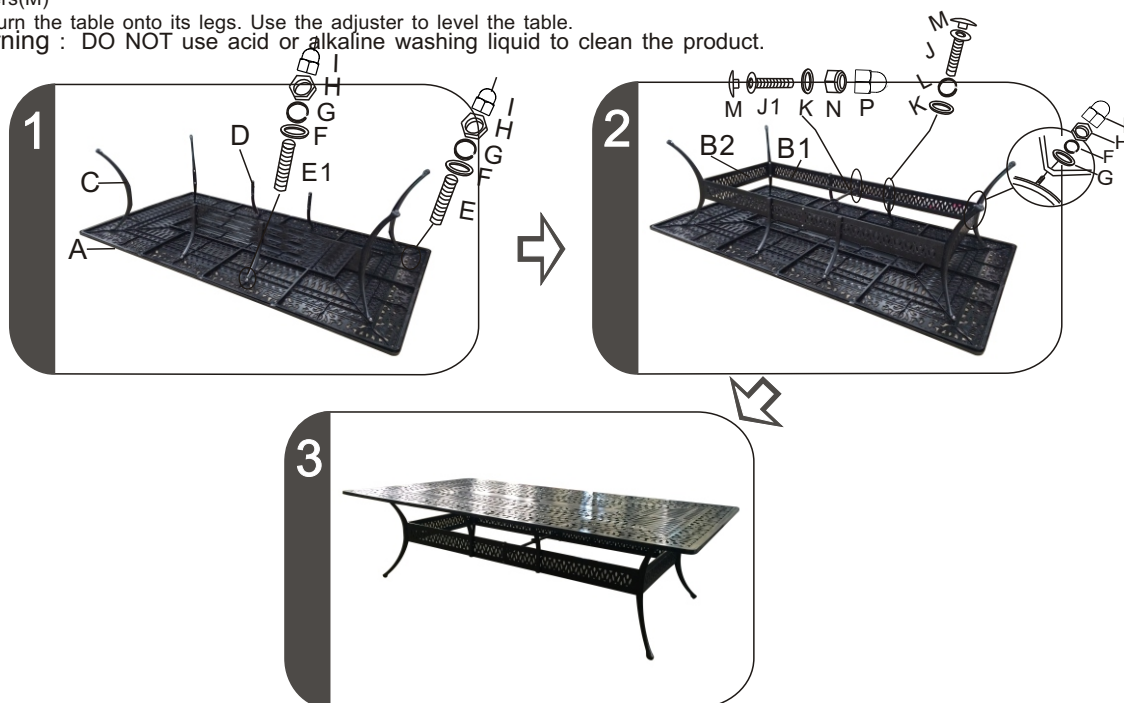

Parts list	Parts picture	Description	Q'ty	Parts list	Parts picture	Description	Q'ty
A		Table top	1	E		Long bolt	4
B1		Long Center plate	2	E1		Short bolt	4
B2		Short Center plate	2	F		Big lock washer	16
C		Side table leg	4	G		Big flat washer	16
D		Middle table leg	4	H		Nut	16
O		Support	1	I		Nut cap	16
R		Wrench	1	J		Bolt	8
S		Adjustable Foot	Factory already assembled	J1		Bolt	4
K		Umbrella ring	1	K		Small flat washer	12
				L		Small lock washer	8
				M		PVC cover	12
				N		Lock nut	4
				P		Nut cap	4
				Q		Wrench	1


Made in China

\* DO NOT OVER TIGHTEN

\* NO POWER TOOLS

\* NO SOCKET DRIVERS



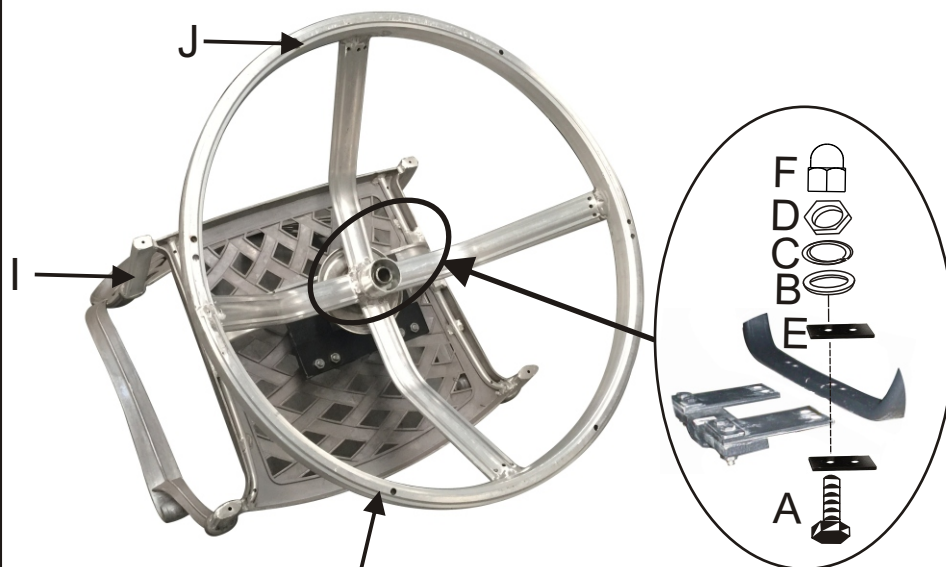

H : This part have been assembled by factory already.

1. Before removing all protective packing material and position base on floor. Attach the seat(I) onto the base (J)with Alu plate as the picture, then assemble using bolt(A), flat washers(B), lock washers(C), nuts(D) and nut cap(F). Be sure to the arrows face to front.
2. Tighten all the bolts and nuts. Test the swivel rocker gently. If the rocker does not rock properly, double check the assembly procedure.
3. Remove all protective packaging.
4. Put Cushion(K) on the unit(as shown in the picture).

**Warning :** DO NOT use acid or alkaline washing liquid to clean the product.



**\* DO NOT OVER TIGHTEN**

**\* NO SOCKET DRIVERS**



Made in China

**\* NO POWER TOOLS**

