



Watch how to easily assemble
At YouTube.com Key word: **LL2046**

Assembly Instructions – Trellis


Note: These instructions apply only to trellis assembly. See separate planter instructions packed with the planter. Assemble the planter **before** assembling the trellis.

Required tools: one 16mm wrench and two 17mm wrenches


Caution – after assembly please make sure the planter is filled full with soil to prevent the planter from tipping




With Casters

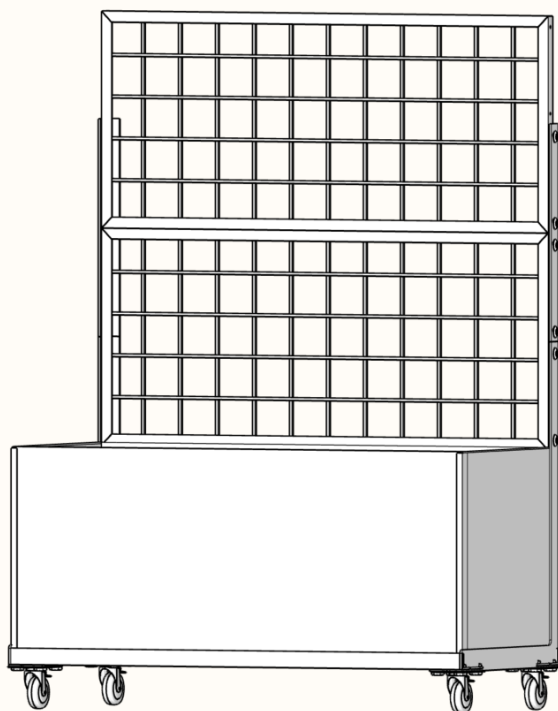


Without Casters

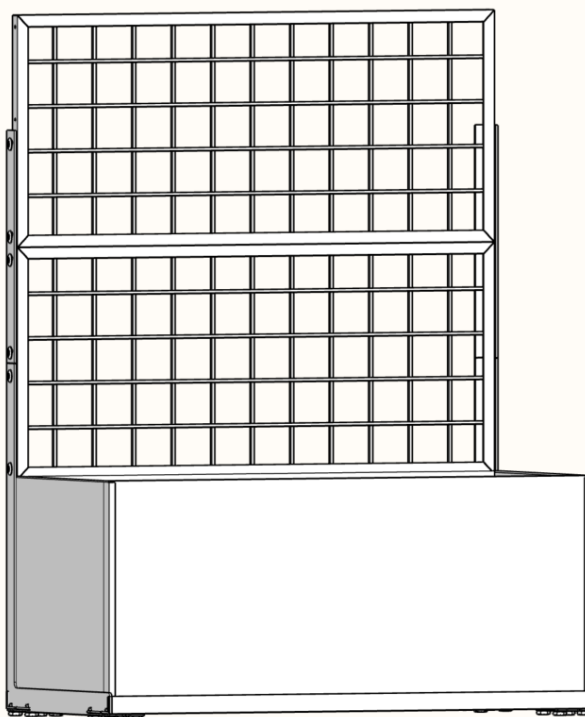


1) Align brackets A and B with the L braces as illustrated.

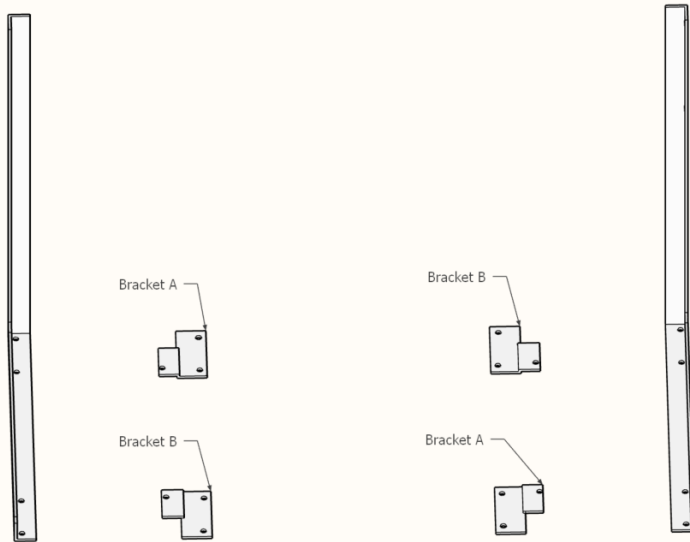


2) Position the A and B brackets on the L braces.

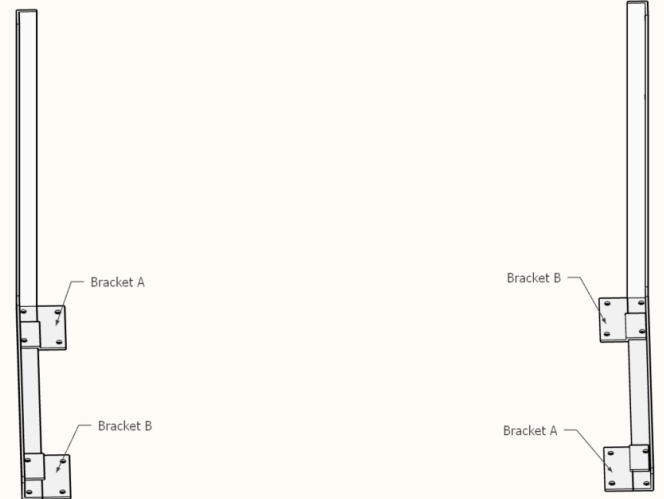


3) Position the angle iron and align the bolt holes

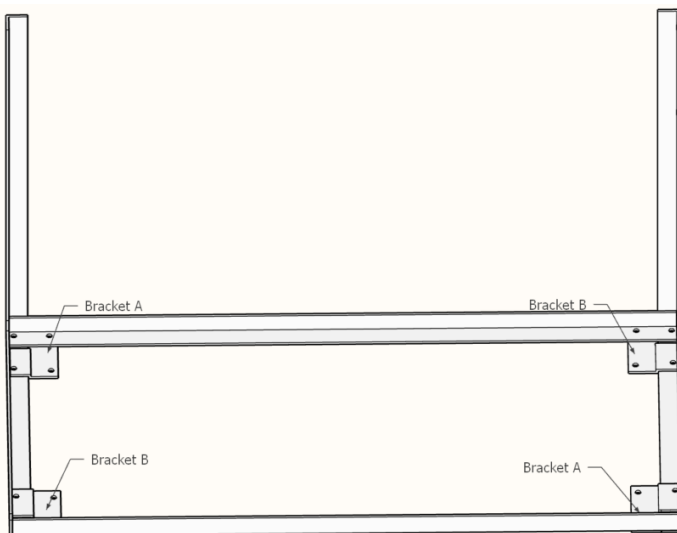


4) For assembly without casters, insert hex head bolts with the bolt heads facing down. After all the bolts are inserted firmly tighten the nuts from the top.

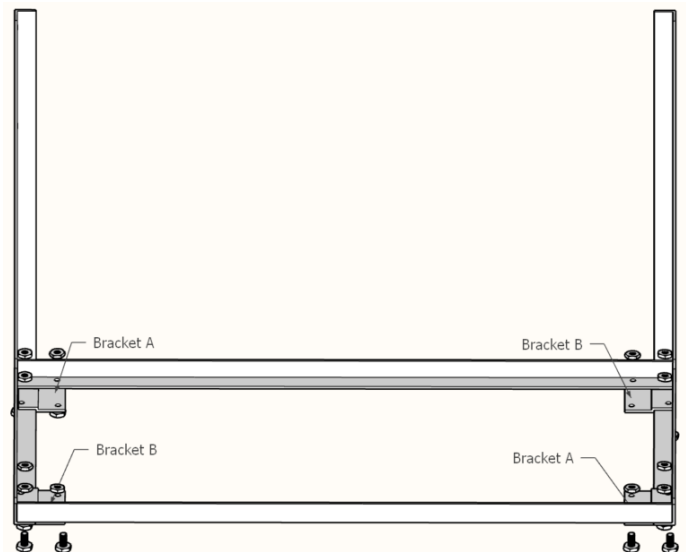


6) For assembly with casters, position the casters under the brackets and the L braces. Align the bolt holes and insert hex head bolts with the bolt heads facing down. After all the bolts are inserted firmly tighten the 17mm nuts from the top.

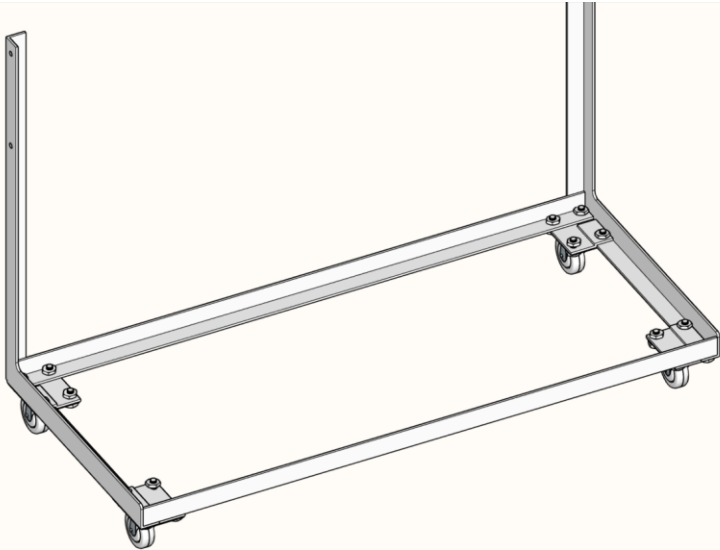


7) Place the planter into the trellis base

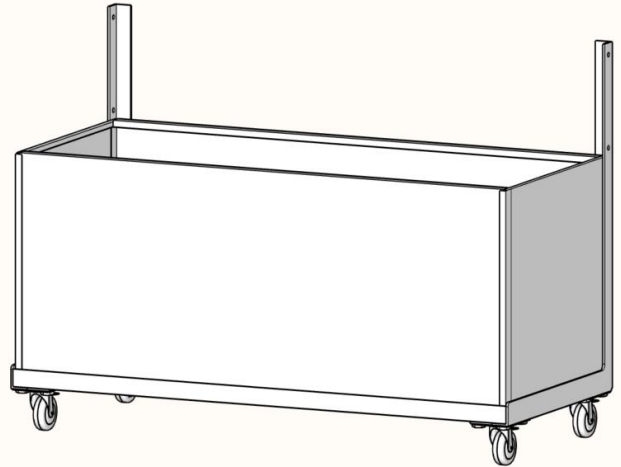


8) Using the black button head bolts secure the first screen into position and tighten the black 16mm nuts.

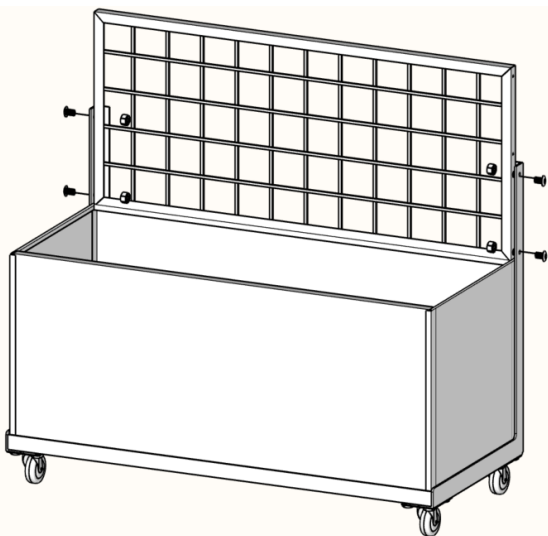

9) Using the black button head bolts secure the extension brackets into position and tighten the black 16mm nuts.

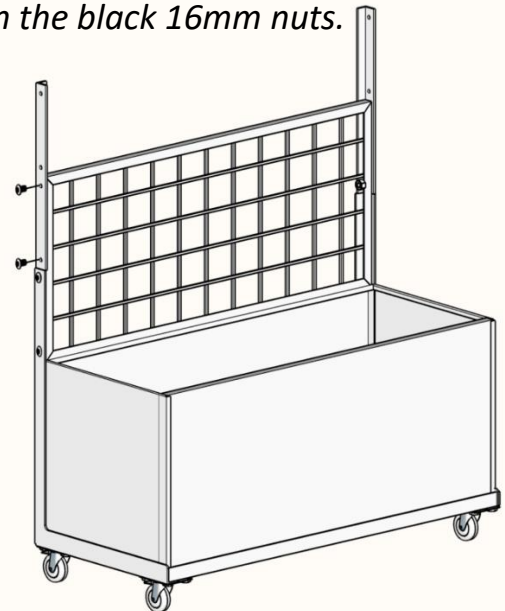

10) Using the black button head bolts secure the second screen into position and tighten the black 16mm nuts.

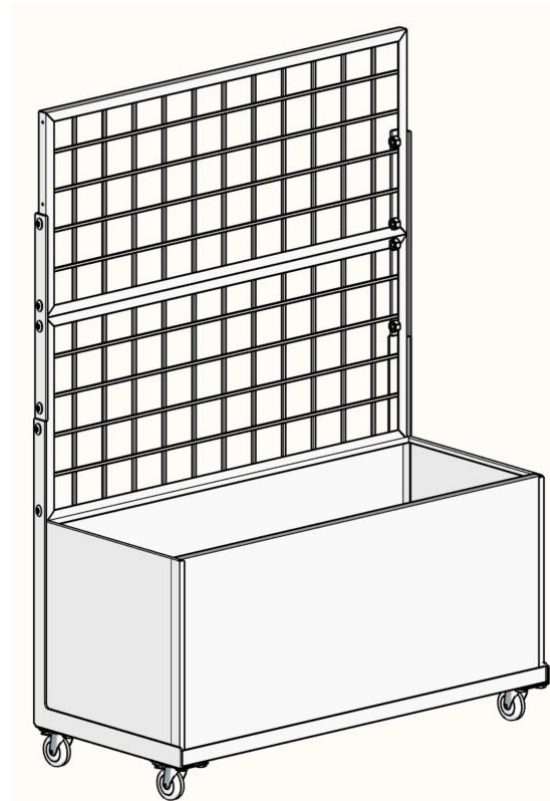

Parts View

