



WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.
 WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.
 INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR

CARE AND MAINTENANCE

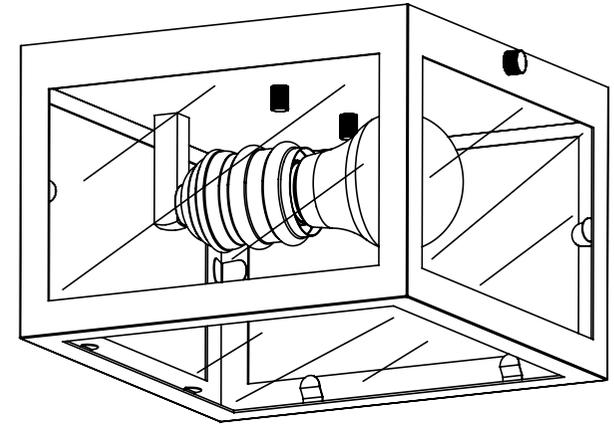
To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
 To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
 Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully

NOTICE& IMPORTANT SAFETY INSTRUCTIONS








- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this luminaire cannot be replaced
 If the cord is damaged, the luminaire shall be destroyed

Model#: JYL9553

Product Dimensions: 8"L X 8"W X 5"H



Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Bracket		1X	G	Sheet Glass 1		4X
B	MountingScrew		2X	H	Sheet Glass 2		1X
C	Ground Screw		1X	I	Canopy Nut		2X
D	Wire Nut		3X	J	Finial		2X
E	Fixture Body		1X	K	Bulb		1X
F	Frame		1X				

PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

If there are any questions relating to defects, missing parts, assembly issues, replacements, or device connectivity issues, please send a detailed email to cs@jonathany.com

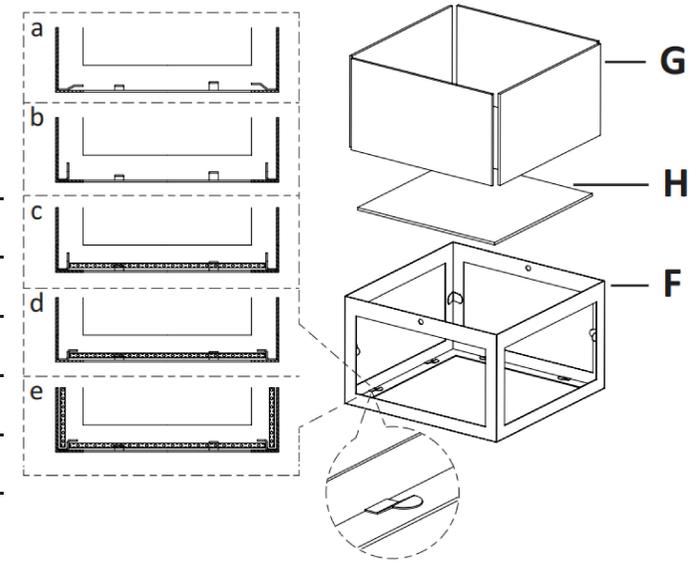1. Push the holders of the bottom of the frame (F) to upright.
2. Place the sheet glass 2 (H) into the frame (F). And use the eight holders of the frame (F) to hold the sheet glass 2 (H) as shown.
3. Insert the four sheet glass 1 (G) into the four inside the frame (F) as shown.
4. Unscrew the two canopy nuts (I) from the mounting bracket (A).
5. Fasten the mounting bracket (A) onto the outlet box using two outlet box screws (B).



Connect, Hot, Black or Red outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
*Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Grounding Instructions:


- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

6. Attach the fixture body (E) to the mounting bracket (A) and fix it by turning the Canopy Nut (I) clockwise.
7. Insert the bulbs (K) into the sockets until secure.

DO NOT EXCEED THE SPECIFIED WATTAGE.

PLEASE USE TYPE "A" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT, THERE IS 4W LED BULBS IN THE BOX.

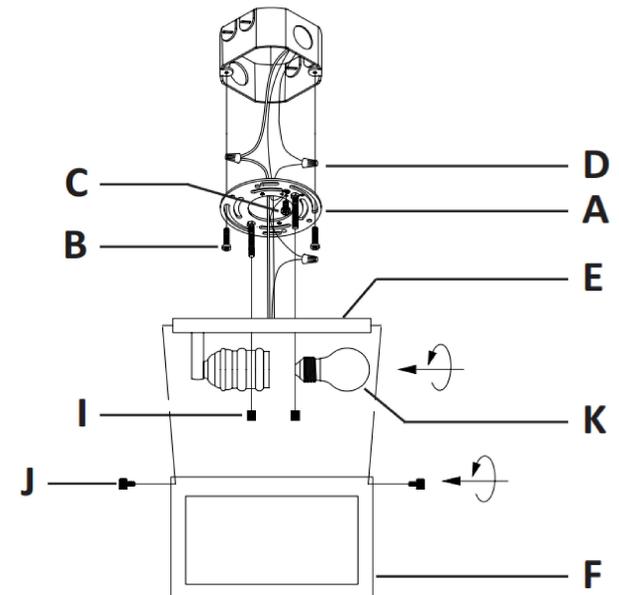8. Place the frame assembly over the fixture body (E), align the two holes of the frame (F) to the canopy of the fixture body (E), then tighten the finals (J).



ENJOY YOUR LAMP