


INSTALLATION MANUAL 3-WAY DIVERTER VALVE

★Installation method and usage for below items are the same.




AB9209

****COMPONENTS CHECKING**

LIST OF THIS STANDARD COMPONENTS:

Please double-check the components list hereinafter and contact our company or our distributor for any unconformity. Remarks: 1.Without affecting their performancing, components may be changed without further notice.


2.Drawings for reference only. Product size & shape refer to actual faucet.

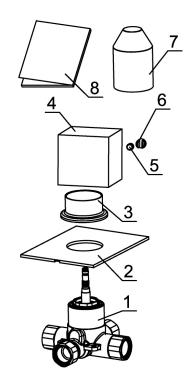


The Component List	Qty.
1. Main body	1
2. Cover plate	1
3. Adjustive cover	1
4. Handle	1
5. Screw	1
6. Decorative plug	1
7. Protective cover	1
8. Manual	1

※Installation Instructions


- ☆ Do not disassemble the main body, as it has been installed & commissioned correctly & precisely before leaving the factory.
- ☆ To avoid the faucet from jamming, do flush the water pipe before installation.
- ☆ After installation, make sure every joint safely sealed & no leaking.
- ☆ The nominal water pressure is 0.05Mpa-1.0Mpa(including cold & hot water pressure), suitable for water temperature from:4°C-90°C.




%Dimension Drawing



%Installation Procedures

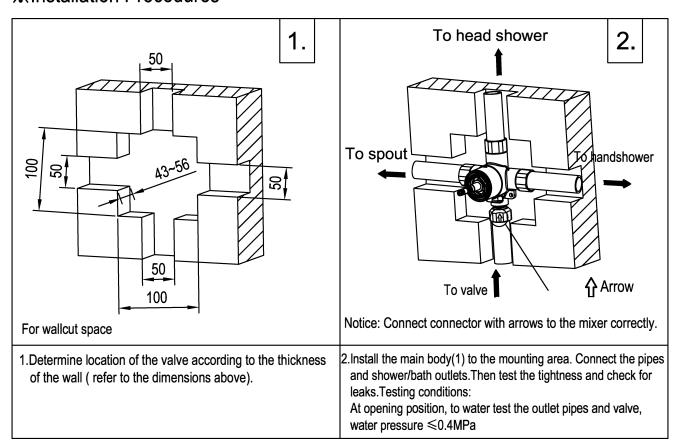


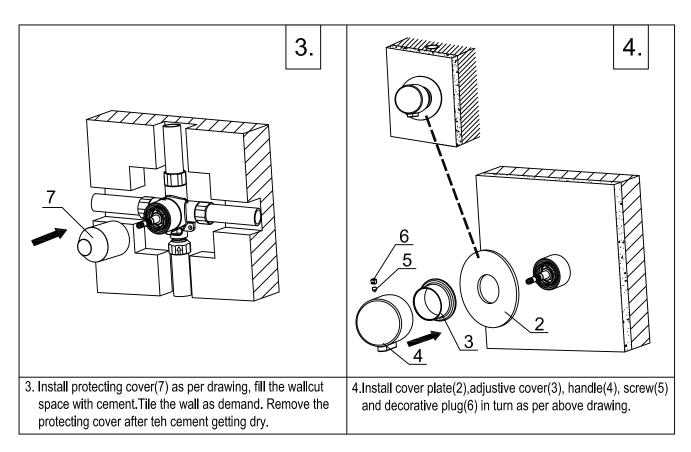

%Usage

☆How to operate the diverter handle:

- 1) Rotate to middle position for headshower outlet.
- 2) Rotate to
 - 1) Rotate to the left for spout outlet.
 - 2) Rotate to up position for overhead shower outlet.
 - 3) Rotate to the right for handshower outlet.

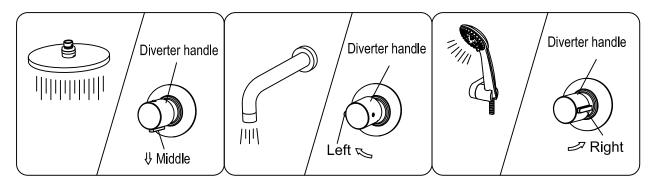

Cleaning & Maintenance

- ☆ To keep the product clean & shining, follow the steps as below:
 - 1.Flush with clean water & dry with soft cloth only.
- 2.If any dirt, clean with soft liquid or transparent glass detergent.
- 3.Do not use any scrubbing detergent, polisher, sand-cloth, paper tissue or scraper.
- 4.Do not use acid detergent, indissovable grain-like detergent or soap.

