


NODE SERIES

VMCL001901B012WH



PROJECT:	TYPE:	CATALOG #:	DATE:
----------	-------	------------	-------

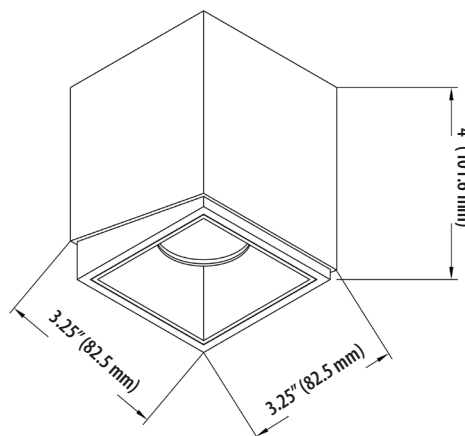

NOMINAL STANDARD SPECIFICATIONS

SKU:	VMCL001901B012WH
FINISH:	WHITE
LUMEN OUTPUT:	856.38
INPUT VOLTAGE:	100 - 277V
COLOR TEMPERATURE:	3000K
CRI: 90	90
DIMMING:	0-10V
POSITIONING:	FIXED
BEAM ANGLE:	33.6°
WATTAGE:	12 W
CUT OUT:	0.59" Dia.
ENVIRONMENT:	DRY / IP20
MOUNTING:	SURFACE

FEATURES

- 3.25" Square LED Surface Mounted Downlight
 - LED Surface mounted downlight, NODE Series
 - Aluminum body structure available in 2 finishes Black and White
 - Integrated LED fixture, surfaced mounted
 - IC Rated
 - DIMENSIONS: 3.25"L x 3.25"W x 4"H
 - LENS BEAM ANGLE: offered in 4 beam angles 14°, 19°, 33°, 40°
 - ETL, cETL, Title 20 Compliant, Title 24 Compliant, Prop 65 Compliant, Energy Star Compliant
 - 3 Year Limited Warranty
- ***THE MEASUREMENTS ARE ROUNDED TO THE NEAREST 1/4"***


SAMPLE ORDERING SKU

1	2	3	4	5	6
VMCL001901B	012	BL	30K	B33	
1 - SKU	2 - WATTAGE	3 - FINISH	4 - COLOR TEMP.	5 - BEAM ANGLE	6 - OTHER OPTIONS
VMCL001901B	012 - 12 W	WH - White BL - Black*	27K - 2700* 30K - 3000 35K - 3500* 40K - 4000*	B14 - 14°* B19 - 19°* B33 - 33.6° B40 - 40°*	EMD - EMERGENCY DRIVER EMC - EMERGENCY CIRCUIT

NOTES

RELATED PRODUCTS AVAILABLE:

- VMCL001901A012BL
- VMCL001901C020BL
- VMCL001901D020BL
- VMCL001901B012WH



NODE SERIES


VMCL001901B012WH



PROJECT: _____ TYPE: _____ CATALOG #: _____ DATE: _____

PHOTOMETRICS


30K - 3000 - STANDARD

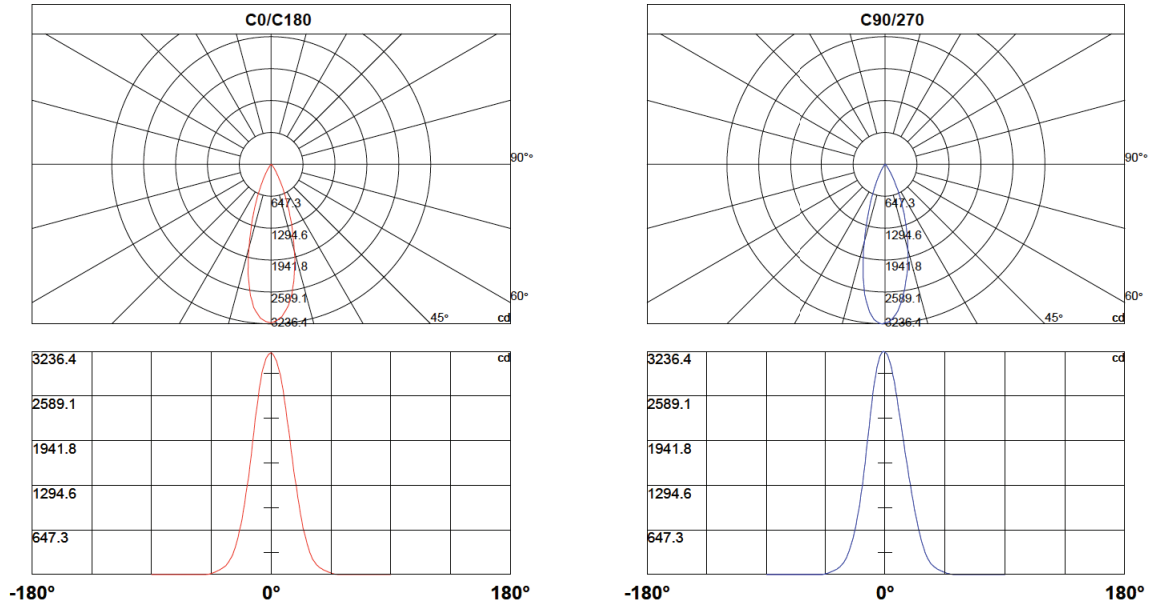

BEAM ANGLE

30K - 3000 - STANDARD

Lux-Distance Curve

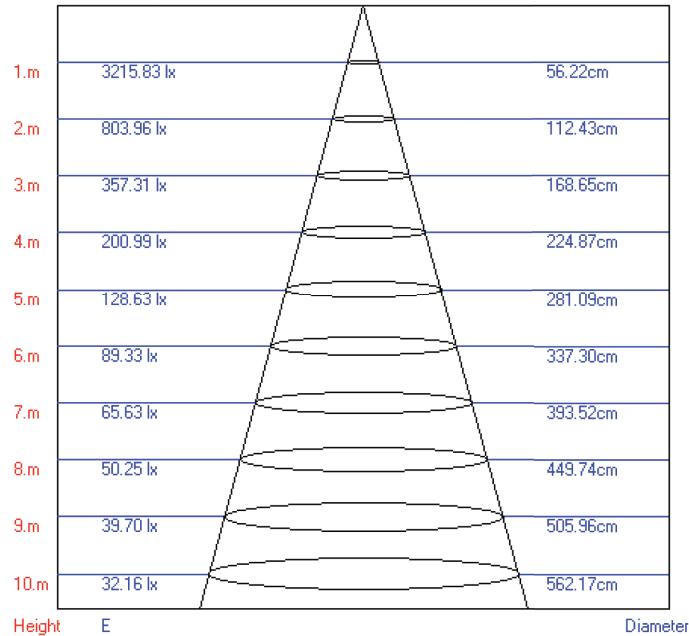

Beam Angle: 31.40°

