

Contemporary Lighting

PRODUCT NAME: Quartz ITEM NUMBER: E31243-20

Please consult your electrician for hanging fixture and wiring.

The fixture is designed to with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

Below is a list of recommended dimmers:

Lutron MACL-153M


Lutron DVL-153P

Lutron SCL-153P

Leviton IPL06-10Z


Leviton 6674-POW

Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

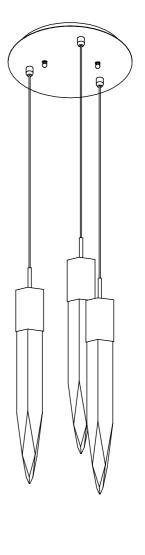



AC LED 3 x 6W Bulbs

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation

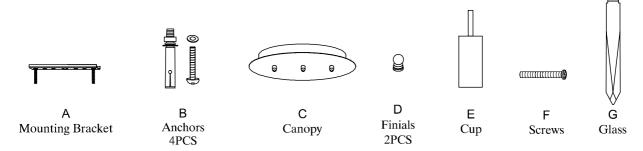


Locate all hardware & components before discarding packaging

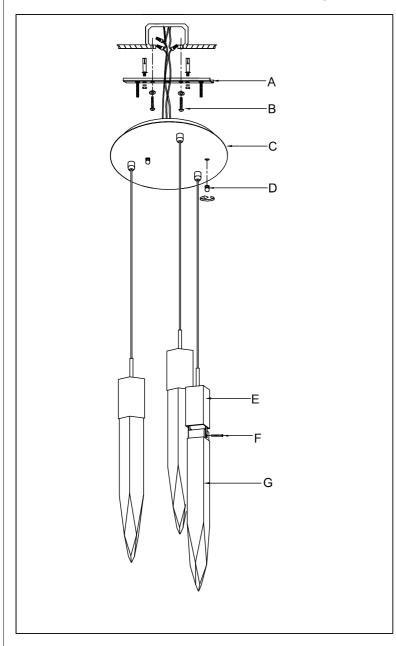





Step 1: Remove mounting bracket (A) from
Canopy (C) and drill holes using 5 /16"
± drill bit where marked, Install bracket
(A) to outlet box by attaching anchors
(B) and secure bracket at ends.



Step 2: Wire fixture to wires in outlet box. Copper wire is for Ground.



Step 3: Carefully remove packaging from fixture, Adjust wire length to desired mounting height, Install canopy (C) to bracket using finials (D) on the bottom of the canopy.



Step 4: Attach glass (G) using set screws (F).

Cleaning & Care:

Clean with soft cloth and a mild detergent.

Do not use abrasive cleaner.