



Location: _____

SYMMONS® Origins®


the smart choice™



S-9601-P, S-9601-P-TRM, S9601PTRMTC Shower System or Trim Specification Submittal

Feature Highlights	Options/Modifications
<ul style="list-style-type: none"> Origins Shower System or Trim Requires Temptrol® Pressure Balancing Shower Valve (included with S-9601-P) Adjustable stop screw to limit handle turn (included with S-9601-P) Integral volume control Tri-star handle 1 mode showerhead with easy to clean nozzles Diverter tub spout not included Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9601PTRMTC) 	<ul style="list-style-type: none"> <input type="checkbox"/> -1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> -2.0 2.0 gpm (7.6 L/min) flow restrictor <input type="checkbox"/> -143 3 mode showerhead <input type="checkbox"/> -145 5 mode showerhead <input type="checkbox"/> -151 1 mode showerhead <input type="checkbox"/> -231 Super showerhead <input type="checkbox"/> -295 Institutional showerhead <input type="checkbox"/> -B Brass escutcheon (chrome only) <input type="checkbox"/> -CHKS Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve <input type="checkbox"/> -D Brass dome cover (chrome only) <input type="checkbox"/> -L1 Less showerhead <input type="checkbox"/> -LAM  Metal finish insert handle <input type="checkbox"/> -LP  Loop handle <input type="checkbox"/> -REB Rebuild trim kit, includes TA-10 and TA-4 <input type="checkbox"/> -VP Vandal resistant escutcheon screws in place of standard screws <input type="checkbox"/> -X Integral service stops - allows water shut-off at valve for service
<h3>Model Numbers</h3>	
<ul style="list-style-type: none"> <input type="checkbox"/> S-9601-P Shower System with integral volume control & Temptrol Pressure Balancing Shower Valve <input type="checkbox"/> S-9601-P-TRM Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately <input type="checkbox"/> S9601PTRMTC Shower Trim with integral volume control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap 	
<h3>Compliance</h3>	
<ul style="list-style-type: none"> ASME A112.18.1/CSA B125.1 Buy American Act (S-9601-P only)  	<p>Note: Append appropriate -suffix to model number.</p>
<h3>Warranty</h3>	
<p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information. Go to www.symmons.com/register to register your Symmons product.</p>	

Dimensions

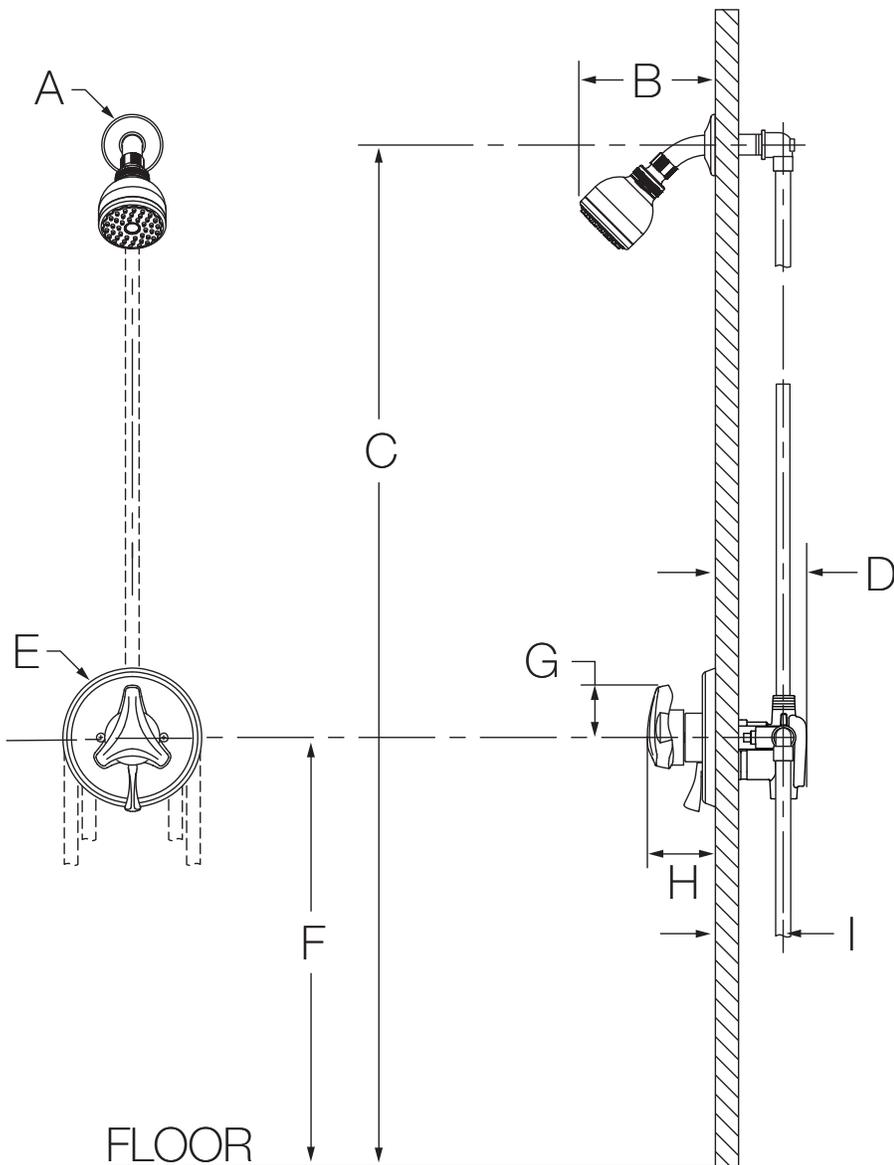

Measurements

A	Ø 2-1/2", 64 mm
B	6-3/8", 162 mm
C	Ref. 77", 1956 mm
D	3-1/2", 89 mm
E	Ø 5-3/4", 146 mm
F	Ref. 42", 1067 mm
G	2-1/8", 54 mm
H	2-7/8", 73 mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.