

196.4401 | 3/4" Thermostatic Valve With 2 Independent Volume Controls




SPECIFICATIONS:


- Turn middle knob to control temperature.
- Turn top knob to control water flow from top output.
- Turn bottom to control water flow from bottom output.
- Thermostatic Valve Flow Rate - 13.0 GPM @ 60 PSI
- Extension Available - TVH.4401E**

FAST SHIP FINISHES :

- Chrome - 196.4401CP / Brushed Nickel - 196.4401BN



Trim
[196.4401T**]



Valve
[TVH.4401]

Belgian Mirror Finish



Legislation Compliance







ZeroDrip Technology




See Spec Sheet For
TVH.4401 For Detailed
Information On Valve.


Technical Diagram

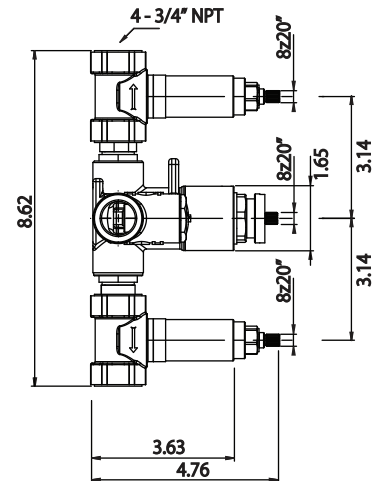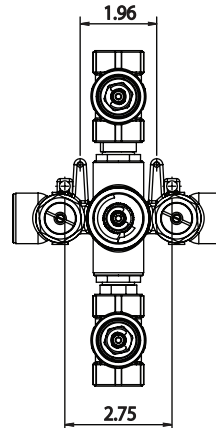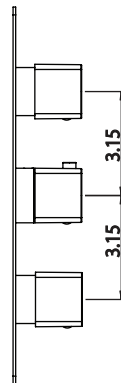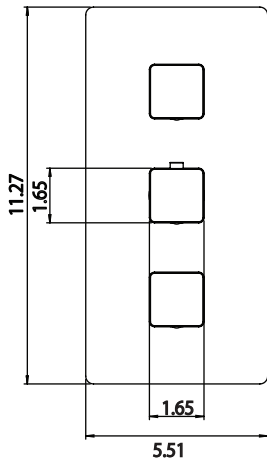

Water Diversion Diagram

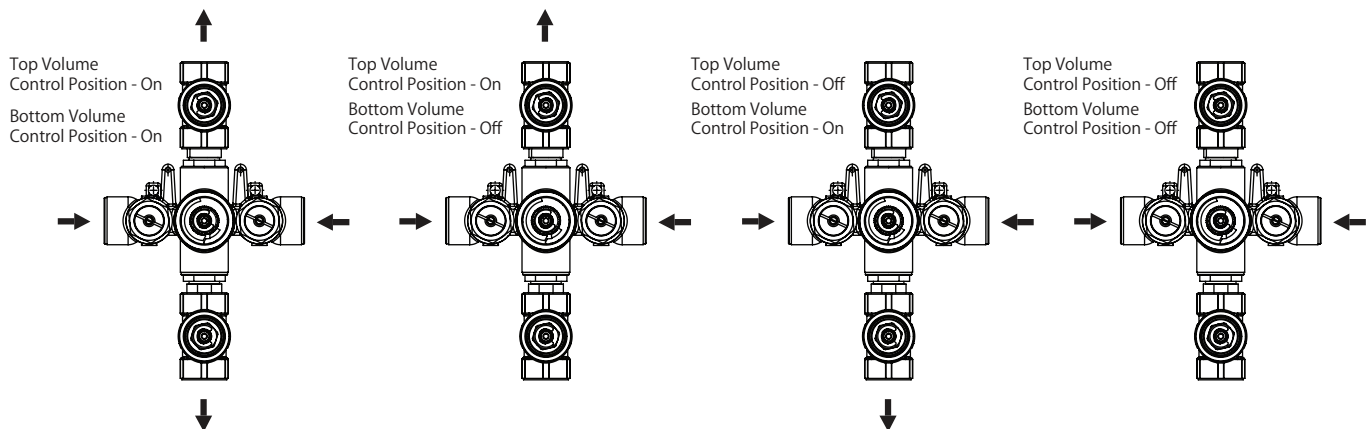

TVH.4401 | 3/4" Thermostatic Valve With 2 Independent Volume Controls Page 1 of 2

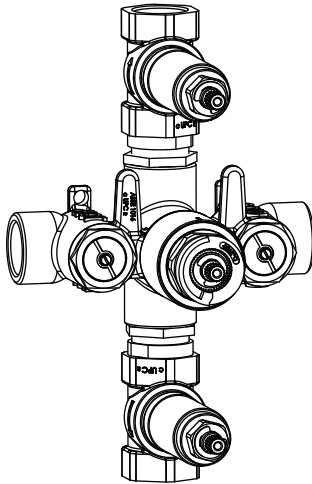

SPECIFICATIONS:

- Turn middle knob to control temperature.
- Turn top knob to control water flow from top output.
- Turn bottom to control water flow from bottom output.
- Thermostatic Valve Flow Rate - 13.0 GPM @ 60 PSI

STANDARDS:

- ASME A112.18.1 / CSA B125.1

WARRANTY:

- Limited lifetime warranty to the original consumer purchaser against finish and workmanship


Legislation Compliance



ZeroDrip Technology



Technical Diagram

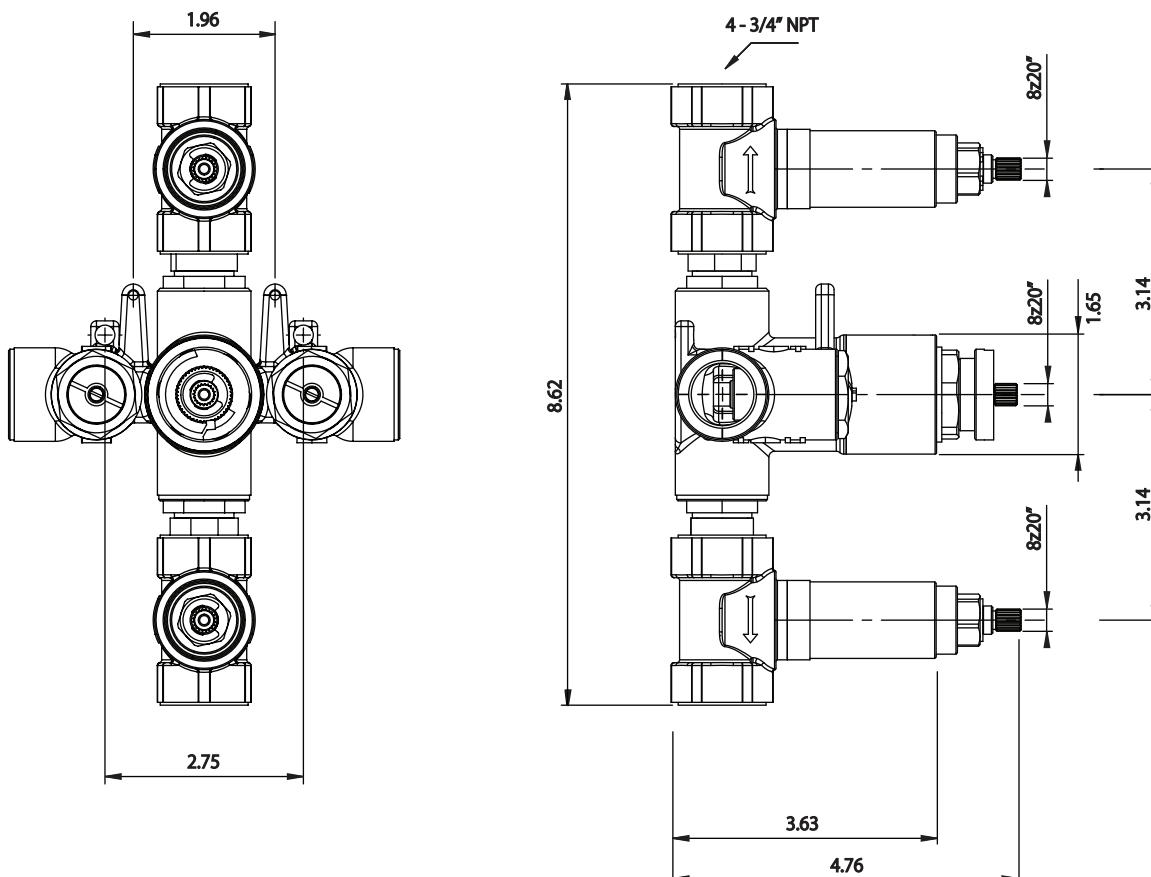

TVH.4401 | 3/4" Thermostatic Valve With 2 Independent Volume Controls Page 2 of 2



Water Flow Diagram

