

Assembly & Installation Instructions

A345

Oceanus Pendant 137675

Page 1 of 3

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*


Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Unpack Fixture (Figure 1)

Component Parts

- A Ceiling Bracket
- B Cable Gripper (2)
- C Gripper Nut (2)
- D Canopy
- J Cupped Washer
- K Hex Nut (2)

1. Carefully unpack the fixture from the carton.
2. Ceiling Bracket (A) and canopy (D) are shipped fastened together.
3. Unscrew both gripper nuts (C) and separate canopy (D) and ceiling bracket (A), set aside.
4. Remove both hex nuts (K) and cupped washer (J) from ceiling bracket (A).

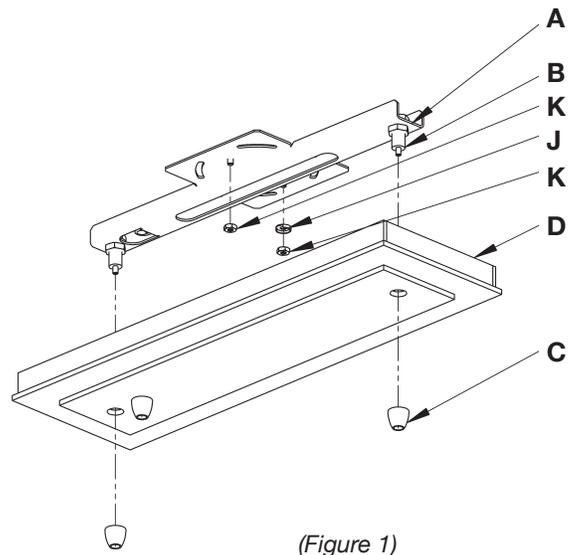

(Figure 1)

To Install to Ceiling (Figures 2-4)


Component Parts

- | | |
|---------------------|------------------------|
| A Ceiling Bracket | I Washer |
| B Cable Gripper (2) | J Cupped Washer |
| C Gripper Nut (2) | K Hex Nut |
| D Canopy | L Canopy Support Cable |
| E Support Cable (2) | |
| F Fixture | |
| G Supply wire | |
| H Strain Relief | |

CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

5. Using two machine screws (not provided), fasten the ceiling bracket (A) to the electric box.

Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.

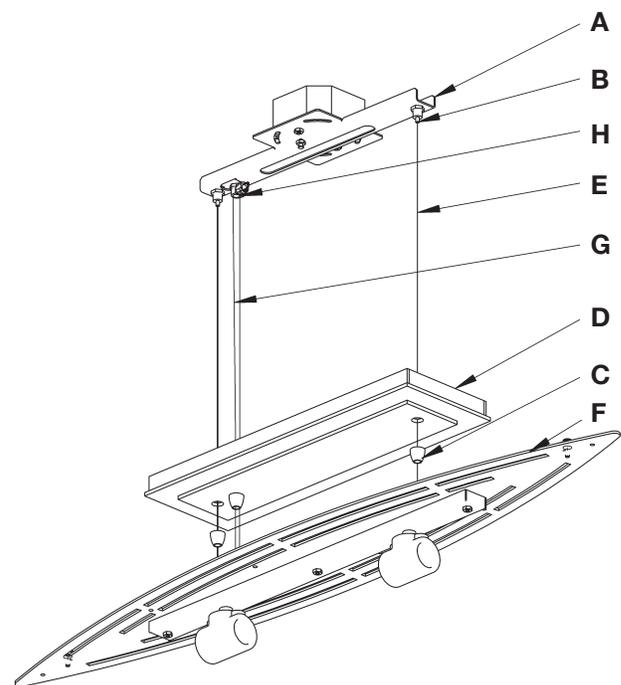

(Figure 2)

(Continued)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

Assembly & Installation Instructions

A345

Oceanus Pendant 137675

Page 2 of 3

To Install to Ceiling (Figures 2-4)

(Continued)

- Slip gripper nuts (C) onto the support cables (E) and allow to rest on top of fixture (F).
- Pull support cables (E) and supply wire (G) through canopy (D). Attach canopy support cable (L) to ceiling bracket using hex nut (K).
- Raise fixture (F) and push support cables (E) through cable grippers (B) until desired fixture height is accomplished and level.


Note: Make sure orientation of slot in the ceiling bracket matches location of supply wire from fixture.

- Slip supply wire (G) through strain relief (H) and push supply wire (G) through slot on the bottom of ceiling bracket (A) followed by washer (I). Adjust location of strain relief (H) on supply wire (G) until it will snap into location provided on ceiling bracket (A).


Note: Make sure orientation of slot in the ceiling bracket matches location of supply wire from fixture.

- Snap strain relief (H) onto supply wire (G) and push into tab on ceiling bracket (Figure 3).
- Once support cables are at the correct height, excess cable can be cut off. To keep the strands of cable together a small piece of electrical tape can be applied to the cut end.
- Cut excess supply wire (G) allowing enough left (approx. 6") to make connections in the electrical box. Strip outside jacket being careful not to cut through shielding of the two inner conductors.
- Run a pigtail lead from the ceiling bracket (A) using cupped washer (J) and hex nut (K) to the junction box. Using suitable wire connectors (not provided) connect unshielded wire from supply wire (G) to all ground wires (bare copper or green shielded) (Figure 4).
- Using suitable wire connectors (not provided) connect fixture wires to supply (wire with white tracer to white and wire with no tracer to black).

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

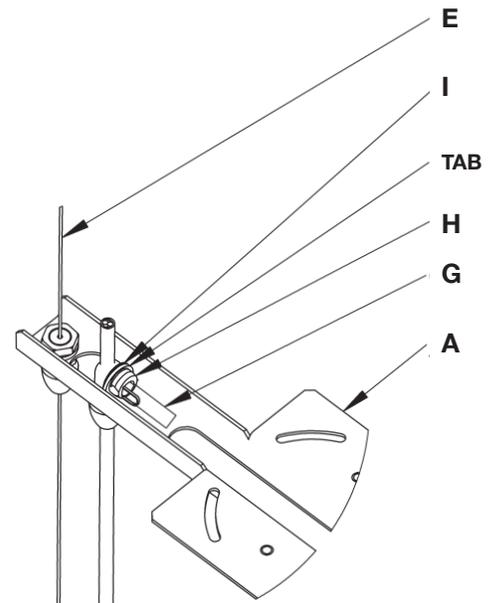

(Figure 3)

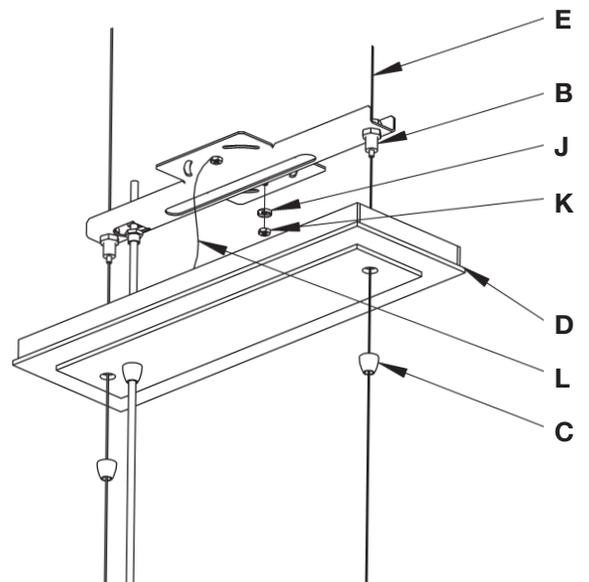

(Figure 4)

(Continued)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

*Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

Assembly & Installation Instructions

A345

Oceanus Pendant 137675

Page 3 of 3

To Install to Ceiling (Figures 2-4)

(Continued)


15. Raise canopy (D) and push firmly to ceiling making sure that no wires are pinched between fixture canopy and ceiling. Fasten to ceiling by threading gripper nuts (C) onto grippers (B) (Figure 4).

Fixture Assembly (Figures 5 & 6)


Component Parts

- K Hex Nut (4)
- F Fixture
- L Textured Plate (2)
- M Threaded Rod (4)
- O Diffuser
- P Shade
- Q Thumb Screw with Washer and Hex Nut (2)

1. Screw four threaded rods (M) onto threaded studs on textured plates (L) until snug (Figure 6).
2. Slide diffuser (O) over threaded rods (M) (Figure 6).
3. Raise textured plates (L) and diffuser (O) up to fixture so that threaded rods (M) pass through holes in fixture (F). Attach hex nuts (K) to threaded rods and tighten (Figure 6).
4. Install Bulbs (not included).
5. Install shade (P) from the bottom and tilt so it will pass fixture (F). Lower the shade so it rests on top of the fixture.
6. Secure the shade (P) with the thumb screw, washer and hex nut (Q).
7. Restore electricity at the main breaker.

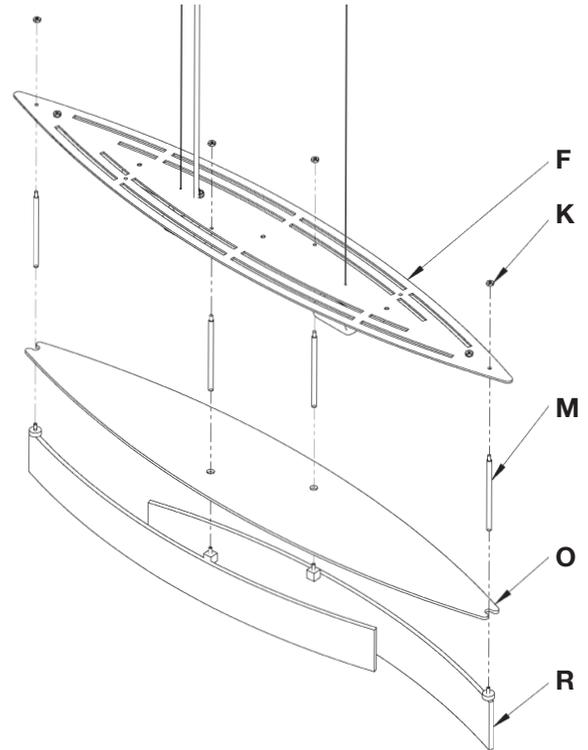

(Figure 5)

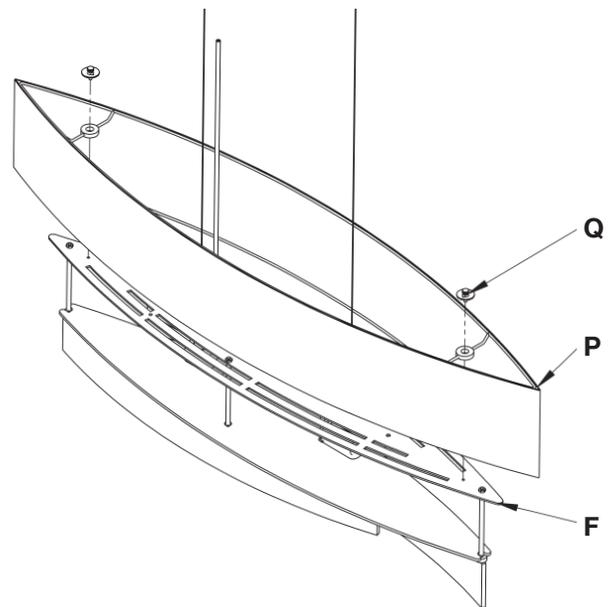

(Figure 6)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.