



# Anglesey™ Comfort Height®

Rear spud flushometer bowl with bedpan lugs  
**K-4352-L**

## Features

- Vitreous china.
- Elongated bowl.
- Comfort Height® elongated bowl.
- With bedpan lugs.
- 1-1/2" (38 mm) top spud.
- Less seat and supply.
- 4" (102 mm) rough-in.
- 2-1/8" (54 mm) fully-glazed trapway.
- 1.28 gpf (4.8 lpf) or 1.6 gpf (6.0 lpf) depending on flushometer specified.
- Floor-mount rear outlet flushometer bowl.
- 31-1/2" (800 mm) x 14-7/8" (378 mm) x 17" (432 mm).

## Recommended Products/Accessories

K-4654-A Lustra™ Commercial Elongated Toilet Seat  
K-4670-CA Lustra™ Commercial Elongated Toilet Seat  
K-10673 WAVE Touchless Toilet 1.28 gpf Flushometer  
K-13517 Manual 1.28 GPF WC Flushometer  
K-23726 Drain treatment

## Included Components

Additional Components:

Bolt cap accessory pack  
Floor screws and bolt caps  
Spud



ADA

CSA B651

OBC

## Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------




0	White
---	-------



# Anglesey™ Comfort Height®

Rear spud flushometer bowl with bedpan lugs  
**K-4352-L**

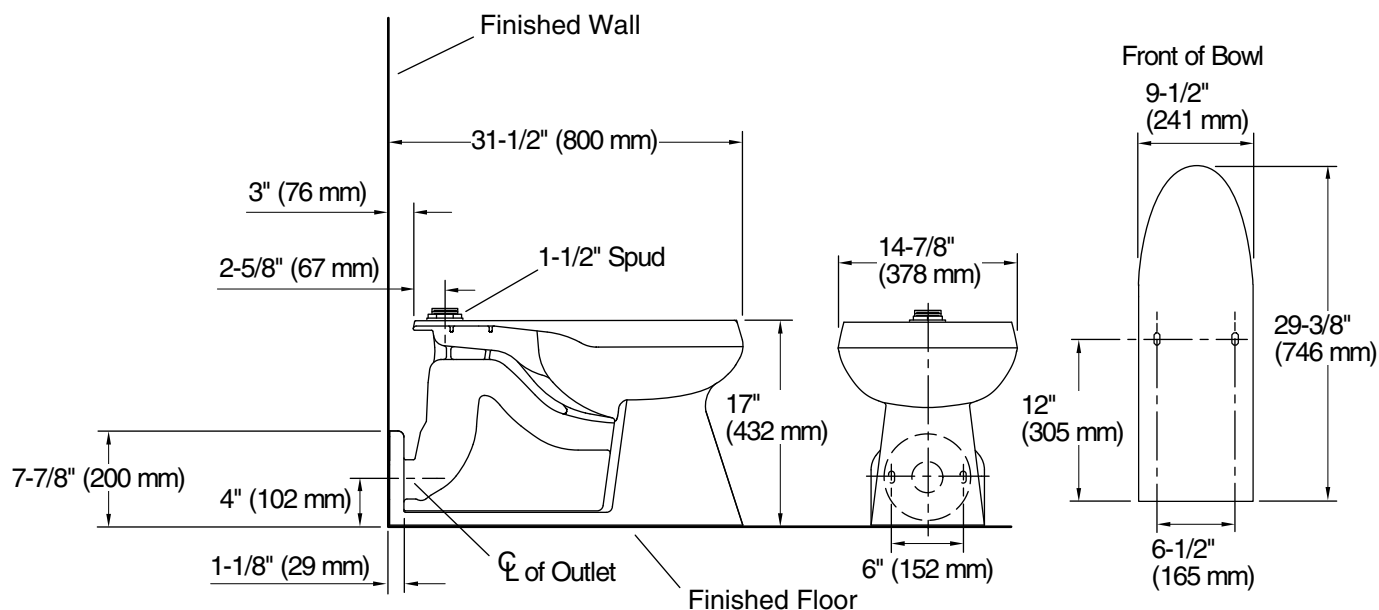

## Technical Information

All product dimensions are nominal.

Toilet type:	Flushometer, Floor-mount
Waste Outlet:	Wall
Bowl shape:	Elongated
Flush type:	Siphon jet
Spud size:	1-1/2", Inlet, Top
Trap passageway:	2-3/8" (60 mm)
Water Consumption	
Reduced:	1.28 gpf (4.8 lpf)
Water surface size:	12" x 10" (305 mm x 254 mm)
Rim to water surface:	5-7/8" (149 mm)
Rough-in:	4" (102 mm)
Seat-mounting holes:	5-1/2" (140 mm)

## Notes

Install this product according to the installation instructions.

For back-to-back installations: Connect the toilet to the vertical stack using a: double fixture fitting, double combination wye and 1/8 bends, or double wye and 1/8 bends.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.