

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 8801-65

For Chandelier Mount Ceiling Fixtures

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
ATTENTION! COUPER LE COURANT AU FUSIBLE OU LE DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.2)

1. Attach the loop (A) to the fixture body (B) by turning it clockwise until tight.
2. Install the light bulbs in accordance with the fixture specifications **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**
3. Thread the nipple (C) into the hex nut on bottom of the fixture body (B) and attach the washer (D), the glass shade (E), the lower washer (F), the arms (G) to bottom of the fixture body (B), aligning hole with the nipple (C) and then lock them with the finial (H).
4. Attach the crystal (I) to the fixture body (B), the arms (G) and the finial (H).

HANGING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
2. Carefully unpack new fixture and lay all the parts on a clear surface.
3. Thread the two Studs (A) about 1/4" into the pre-drilled holes in the mounting strap spaced the same distance apart as the holes in the fixture canopy (B).
4. Install the mounting strap to the Junction Box with the two Junction Box Screws as shown. The side of the mounting strap marked "GND" must face out.
5. While holding the canopy and lamp cluster towards the ceiling, connect the electrical wires as Shown in Fig.3, making sure that all wire connectors are secured. You may have to wrap the connections with electrical tape. If there is a Ground Wire (green or bare copper) in your outlet box, connect the fixture's Ground Wire to it. Otherwise connect fixture's ground wire directly to the mounting strap with the Green Screw provided. After wires being connected, tuck them carefully inside the Junction Box.
6. Then cover the junction box with canopy (B), aligning the Screw of mounting plate with the hole of canopy and lock it with brass ball (C).
7. Open one the end link of the chain provided and connect to the fixture loop (E). Close the link.
8. Lace the fixture wires through the chain.
9. Open the other end link of the chain and hang the fixture on the loop at the ceiling. Close the link.
10. Lace the fixture wires, ground wires through the loop and canopy (B) and pull until taut.
11. Attach the crystal (D) to the small ring of the fixture body (B).

Your installation is now complete Return power to the junction box and test the fixture.

Fig.1

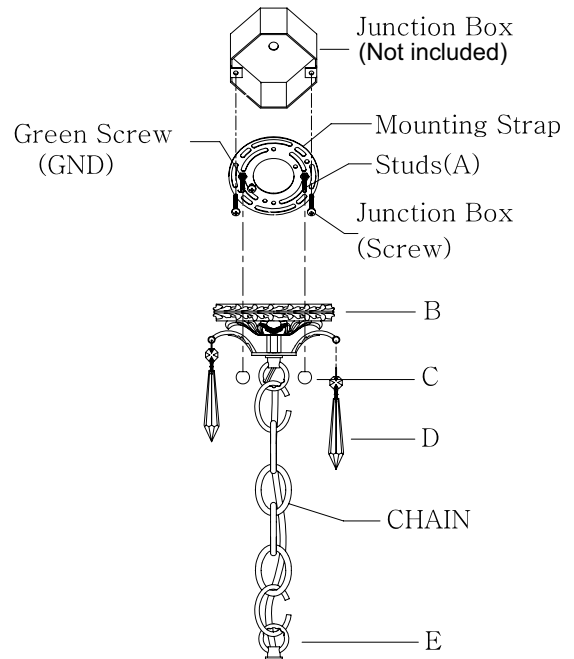


Fig.2


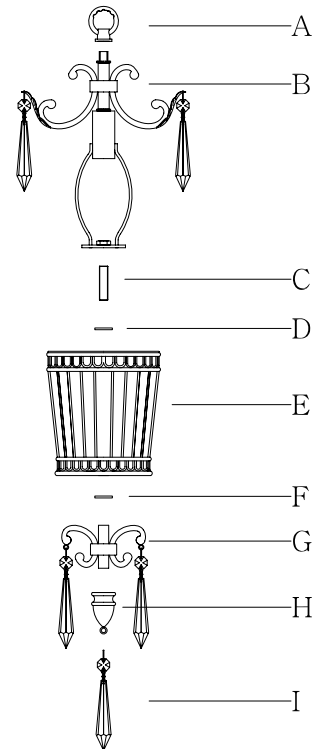


Fig.3

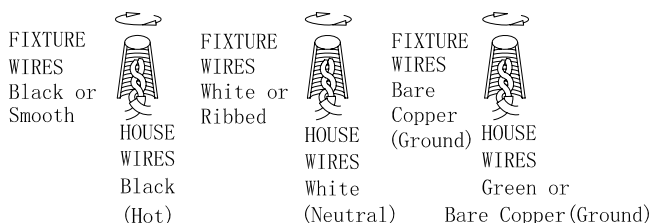

LIVEX[®]
 LIGHTING
 EST. 1993

DOC20141208801

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 8801-65

For Semi Flush Mount Ceiling Fixtures

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
ATTENTION! COUPER LE COURANT AU FUSIBLE OU LE DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the two Studs (A) about 1/4" into the pre-drilled holes in the Mounting strap spaced the same distance apart as the holes in the canopy (B).
4. Attach the Mounting strap to the Junction Box with the two Junction Box Screws as shown. The side of the Mounting strap marked "GND" must face out.
5. While holding the column assembly towards the ceiling, connect the electrical wires as Shown in Fig.2, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the Mounting strap with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.
6. Attach the canopy (D) and the washer (C) to top of the fixture body (F), then lock it with the hex nut (B).
7. Install the light bulbs in accordance with the fixture specifications NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!
8. Thread the nipple (G) into the hex nut on bottom of the fixture body (F) and attach the washer (H), the glass shade (I), the lower washer (J), the arms (K) to bottom of the fixture body (F), aligning hole with the nipple (G) and then lock them with the finial (L).
9. Put the lamp canopy (D) onto the outlet box, aligning screws on Mounting strap with mounting holes in canopy and lock it securely with ball nut (E).
10. Attach the crystal (M) to the fixture body (F), the arms (K) and the finial (L).

Your installation is now complete Return power to the junction box and test the fixture.

Fig.1


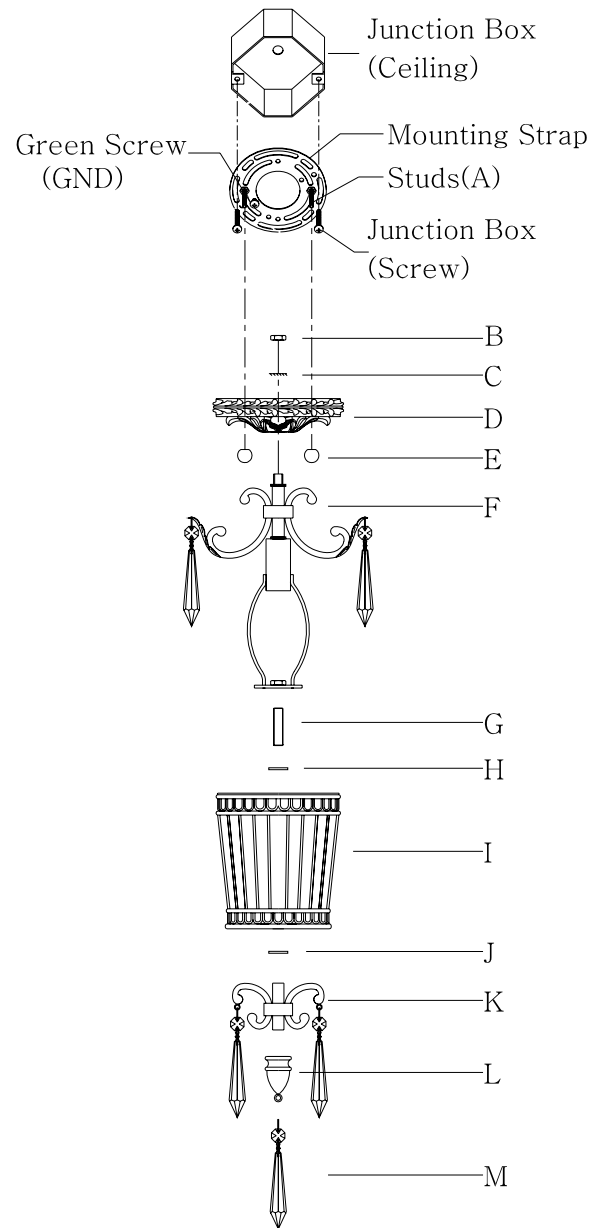


Fig.2

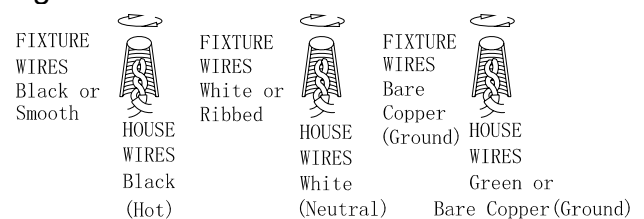

LIVEX[®]
LIGHTING
EST. 1993

DOC20141208801