

VIGO INDUSTRIES INSTALLATION GUIDE FOR SHOWER DOOR (MODEL VG6083)

SAFETY PRECAUTIONS

This Installation Guide uses the following symbols to indicate important information. Always observe the instructions indicated by these symbols.

WARNING

Instructions that, if ignored, could result in death or serious personal injury caused by incorrect handling or installation of the product. These instructions must be observed for safe installation.

IMPORTANT

Maintenance and other important non-personal injury and non-material damage instructions or statements that should be observed.

It is highly advised to dry fit the unit prior to any installation.

 **Product lines may change, contact your Vigo representative at 1-866-591-7792 or visit our website at www.vigoindustries.com for the most up to date product line information.**

*VIGO reserves the right to modify/update all hardware and glass components based on bettering the product for the end user's experience. If you have any questions contact VIGO Tech Support at 1-866-591-7792.


MODEL VG6083 SENECA

INSTALLATION INSTRUCTIONS FOR SHOWER DOOR

PLEASE READ INSTRUCTIONS BEFORE PROCEEDING



















Parts List

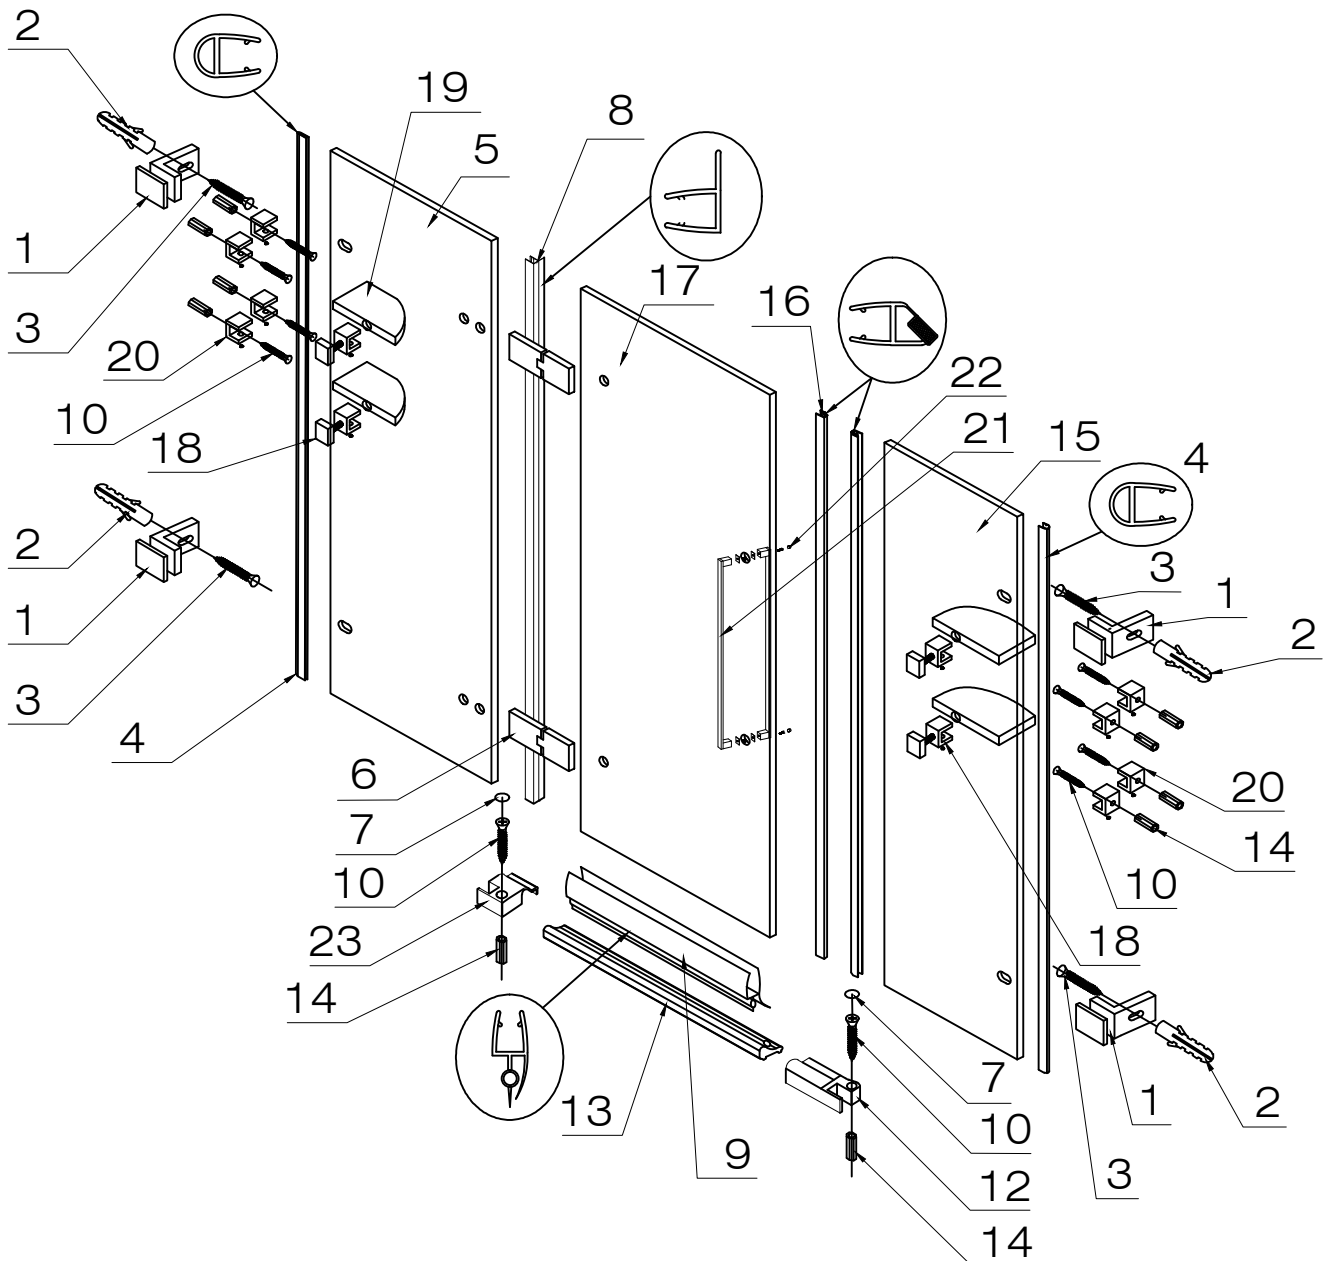1. Glass support (4pc)
2. Plastic anchors white (4pc)
3. Hex screw 1 5/8" (4pc)
4. Side seal strip (2pc)
5. Big fixed panel (1pc)
6. Hinges (2pc)
7. 8mm plastic cover (2pc)
8. Side seal strip with flange (1pc + 1pc spare)
9. Door bottom seal strip (1pc + 1pc spare)
10. Phillips screw 3/4" (10pc)
11. Left threshold clip (1pc)
12. Right threshold clip (1pc)
13. Threshold (1pc)
14. Plastic anchors green (10pc)
15. Small fixed panel (1pc)
16. Magnetic seal strip (2pc)
17. Door (1pc)
18. Glass shelf holder to glass (4pc)
19. Glass shelf (4pc)
20. Glass shelf holder to wall (8pc)
21. Handle assembly (1pc)
22. 10mm plastic cover (2pc)
23. Left threshold extended clip (1pc)
24. Right threshold extended clip (1pc)
25. Allen key pack (1 pack)



GLASS THICKNESS 8mm / 5/16"

NOTE: INSTALLATION MUST BE DONE BY A QUALIFIED, LICENSED PROFESSIONAL.

1. GLASS SUPPORT  98095	2. PLASTIC ANCHOR WHITE  98038	3. HEX SCREW 1 5/8"  98039	4. SIDE SEAL STRIP  96043	5. BIG FIXED PANEL  97050CL25
6. HINGES  98146	7. 8mm PLASTIC COVER  98111	8. SIDE SEAL STRIP WITH FLANGE  96044	9. DOOR BOTTOM SEAL STRIP  96045	10. PHILLIPS SCREW 3/4"  98033
11. LEFT THRESHOLD CLIP  98057	12. RIGHT THRESHOLD CLIP  98058	13. THRESHOLD  98104	14. PLASTIC ANCHOR GREEN  98037	15. SMALL FIXED PANEL  97051CL
16. MAGNETIC SEAL STRIP  96046	17. DOOR  97049	18. GLASS SHELF HOLDER (TO GLASS)  98147	19. GLASS SHELF  97026	20. GLASS SHELF HOLDER (TO WALL)  98148
21. HANDLE  98149	22. 10mm PLASTIC COVER  98135	23. LEFT THRESHOLD EXTENDED CLIP  98154 24. RIGHT THRESHOLD EXTENDED CLIP  98155	25. ALLEN KEY PACK  MISC	

MODEL	DIMENSION "A" (DOOR)	DIMENSION "B" (BIG FIXED PANEL)	DIMENSION "C" (SMALL FIXED PANEL)	DIMENSION "D" (WIDTH)	HEIGHT	DOOR OPENING WIDTH
VG6083XX7274	27 5/8" x 73"	25 3/4" x 74"	19 7/8" x 74"	71 1/4" - 72 3/4"	74"	22 7/8" - 24 1/4"

A, B, C & D DIMENSIONS WERE MEASURED AFTER SHOWER DOOR WAS COMPLETELY INSTALLED

⚠ WARNING

WE STRONGLY RECOMMEND THAT A LICENSED PROFESSIONAL INSTALL THIS SHOWER DOOR AND INCLUDE THE ASSISTANCE OF A SECOND PERSON TO INSTALL THE DOOR UNIT.

INSTALLATION OF THE SHOWER DOORS BY AN INEXPERIENCED PERSON MAY RESULT IN GLASS BREAKAGE AND, CONSEQUENTLY, CAUSE PERSONAL INJURY OR DEATH.

- Handle fragile items with care to prevent personal injury or material damage.
- The glass panels are tempered and cannot be cut. Never attempt to do so.
- Always rest glass on a level surface

BEFORE STARTING

Compare items on your invoice with what you have received. Carefully review the Packing List on page 2. If any items are missing contact Vigo Industries at 1-866-591-7792. Please check our website at www.vigoindustries.com for additional information or instructional videos.

REQUIRED TOOLS

- Square and/or Phillips #1 and #2 screwdriver
- Flat head screwdriver
- Electric drill plus 1/32", 3/32", 1/8" and 1/4" drill bit (depending on wall)
- Level
- Measuring tape
- Pencil (non-permanent)
- Clear silicone caulking
- Utility knife
- Shims (not provided)

⊗ IMPORTANT

- Fiberglass, acrylic or sheetrock construction might not be sufficiently strong enough to support the shower door unit. You should use the wood framing studs from behind the face edge of the stall to provide a secure mounting to the door. Apply a bead of silicone between the walls and base of the stall.
- For optimum performance, you should install the shower door perfectly level on a level surface. Failure to do so will lead to water leakage and potential property damage.
- When installing use heavy duty gloves.

IMPORTANT:

THE CLEAR GLASS MODEL HAS A REVERSIBLE DOOR AND CAN BE INSTALLED TO THE RIGHT OR LEFT SIDE. (SEE CONFIGURATION DIAGRAM BELOW)

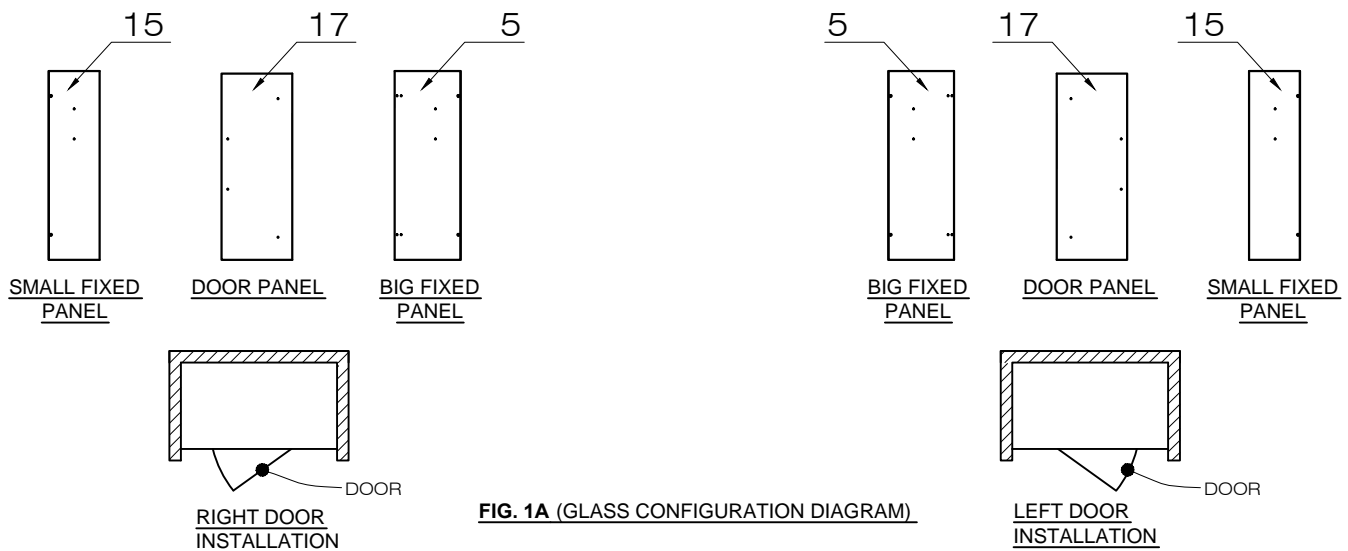


FIG. 1A (GLASS CONFIGURATION DIAGRAM)

PREPARATION STEPS TO FOLLOW BEFORE INSTALLATION

⊘ IMPORTANT

- Verify that the overall size of the shower door opening is appropriate for the shower door.
- Due to individual site variations, exact guidelines for every situation cannot be supplied. The recommended framing and dimensional requirements are shown for a typical application and may vary depending on the site requirements.
- To prevent damage to the finish, you should protect the shower cabin bottom with a cardboard protector before beginning the installation.
- Properly apply silicone to the wall and base joints.
- Make sure to read corresponding base instructions carefully prior to install on the Vigo Brand Shower Door System. Failure to do so can cause water leakage and bodily harm.
- Ensure that there is sufficient structural support behind the shower wall to hold the weight of the shower door. If there is insufficient enough support, then reinforce the shower walls with wooden studs prior to shower door installation. [SEE FIG. 1]





FIG.1

⚠ CAUTION

- **GASKETS NEED TO BE IN BETWEEN ALL GLASS AND METAL CONTACT. FAILURE TO DO SO CAN LEAD TO BREAKAGE AND POTENTIAL BODILY HARM.**

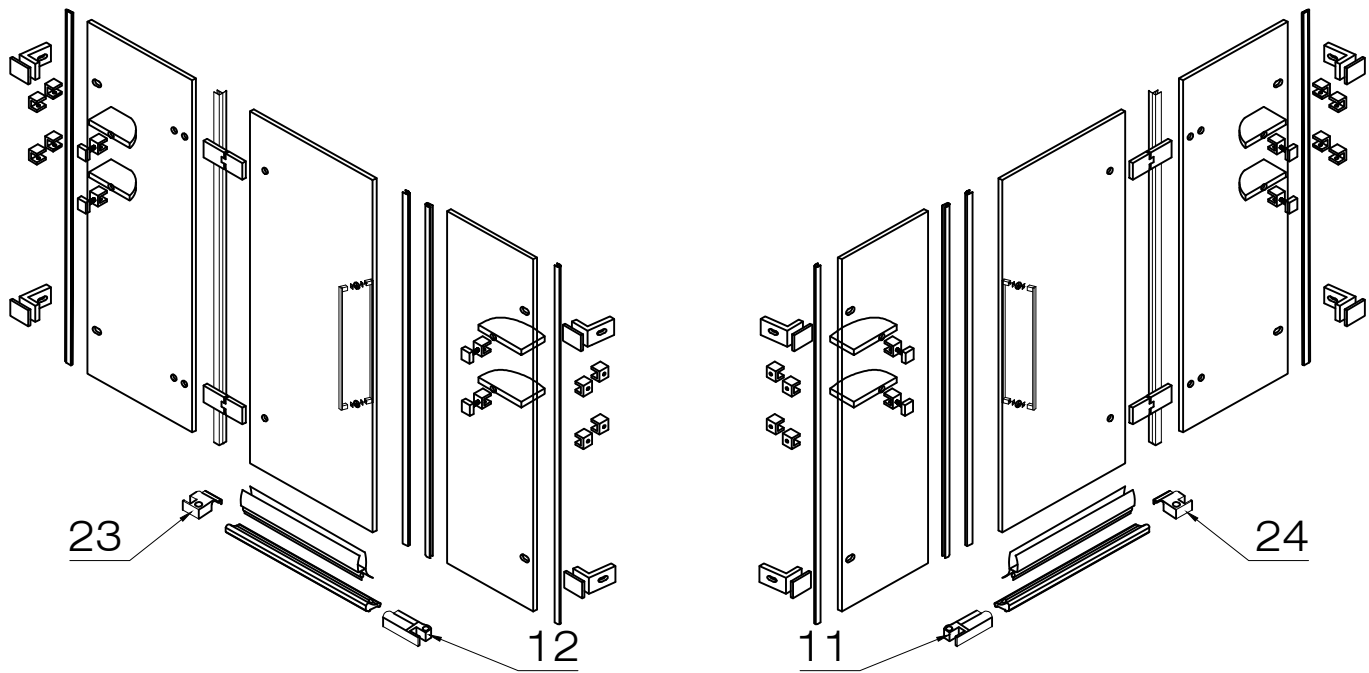


LEFT DOOR INSTALLATION

RIGHT DOOR INSTALLATION


INSTALLATION STEPS

A. INSTALLING THE BIG FIXED PANEL (#5)


1. Arrange the big fixed panel (#5) to the preferred configuration to determine the orientation of glass supports (#1). Clean the big fixed panel (#5) edge where the side seal strip (#4) is to be installed with rubbing alcohol. Install the side seal strip (#4) to the wall side of the big fixed panel.

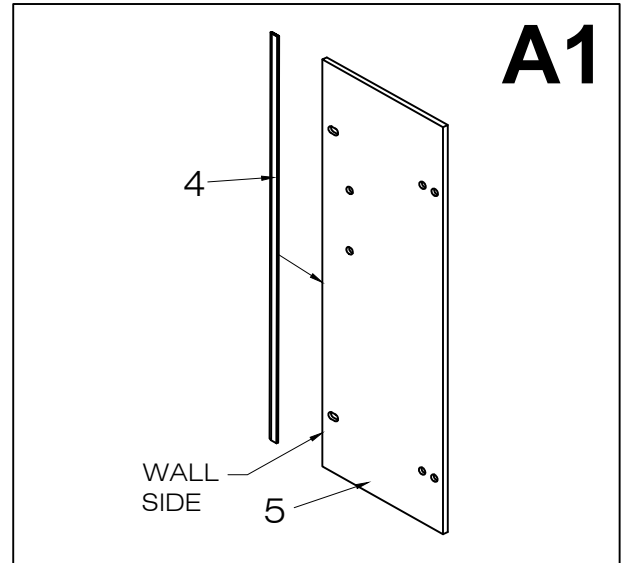


2. Screw in the glass supports (#1) with the hex key to the big fixed panel (#5). Be sure to use washers on both sides of the panel.

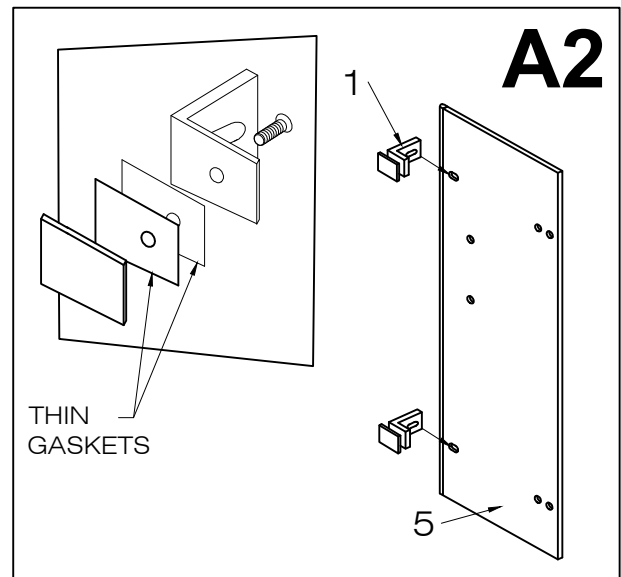


3. Mark holes on the wall for the mounting screws after leveling panel.

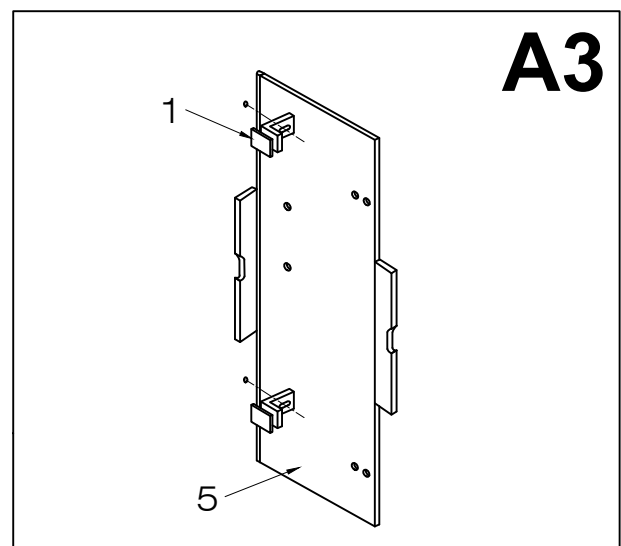


4. Remove the big fixed panel and drill holes into the wall. Insert plastic anchors (#2) into the holes. **⚠ Not necessary if installing into studs. Studs are the preferred means of installation, anchors can pull out of the wall causing property damage and bodily harm. There is a 15mm adjustment built into the glass supports for minor modifications.**

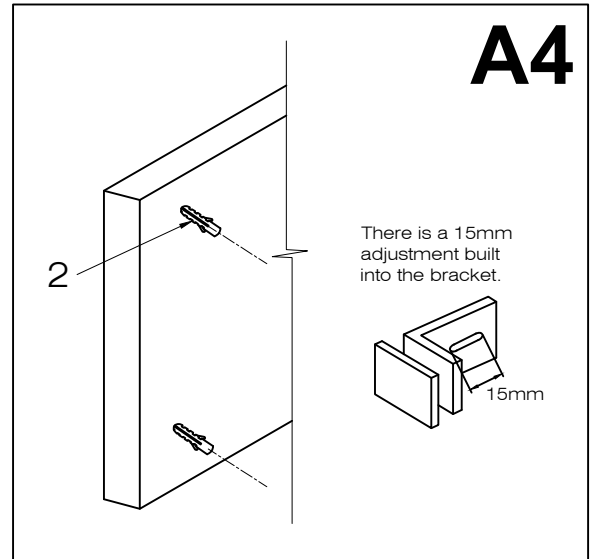


5. Replace the big fixed panel (#5). Screw into the wall with 1 5/8" hex screws (#3).

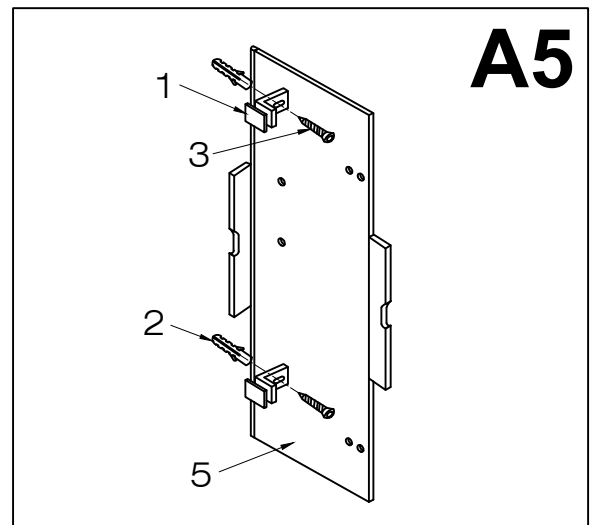


6. Position the left threshold extended clip (#23) at the bottom of the big fixed panel (#5). Mark the location for the mounting hole.

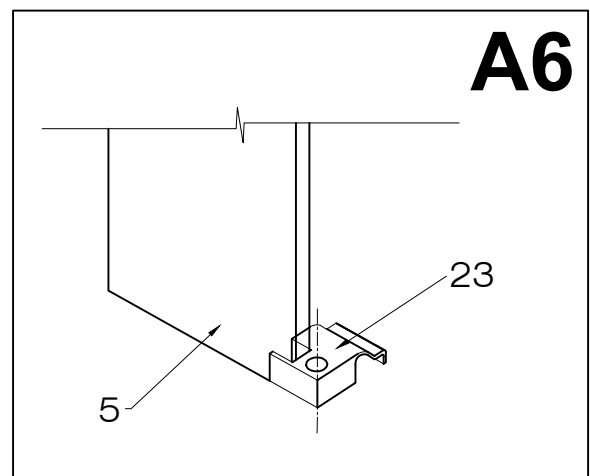


7. Remove the left threshold extended clip (#23). Move the big fixed panel (#5) out of the way and drill a hole into the respective mark then put a plastic anchor (#14) in it.
⚠ Not necessary if installing into studs. Studs are the preferred means of installation, anchors can pull out of the wall causing property damage and bodily harm.

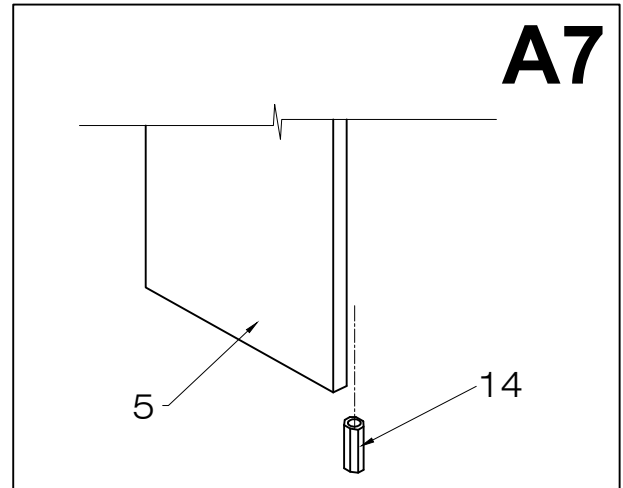

8. Replace the left threshold extended clip (#23) and fixed panel (#5) to the proper position. Screw it into the floor with a 3/4" Phillip screw (#10).

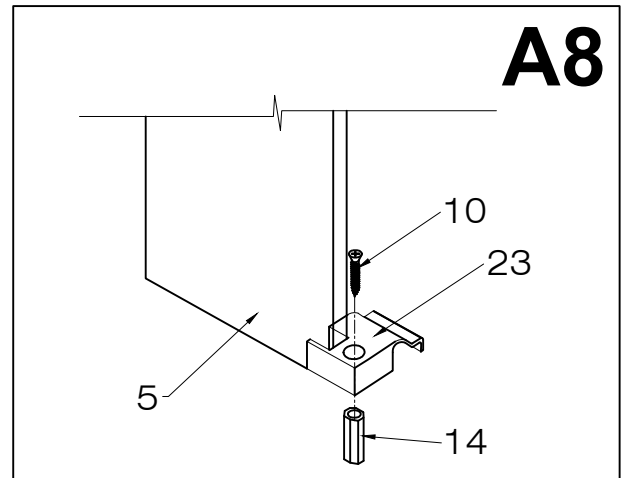


9. Clean the big fixed panel (#5) where the side seal strip with flange (#8) is to be installed with rubbing alcohol. Install the side seal strip with flange (#8) to the hinge side of the big fixed panel (#5). The flange should face towards the inside of the shower cabin and the bottom should rest on the left threshold extended clip (#23).

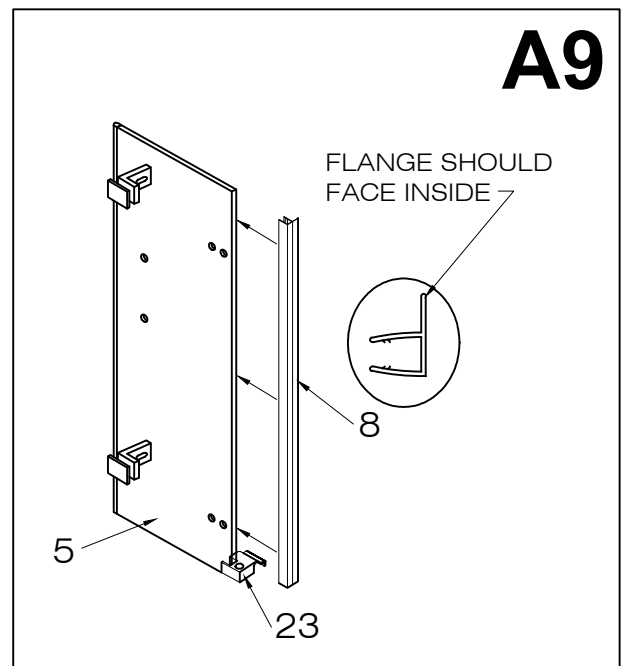


B. INSTALLING THE GLASS SHELVES


1. Unthread the shelf glass holder cap (#18), insert threaded portion of shelf glass holder into the hole of the big fixed panel (#5) and then thread the holder cap back on. The upper glass shelf should be installed first.

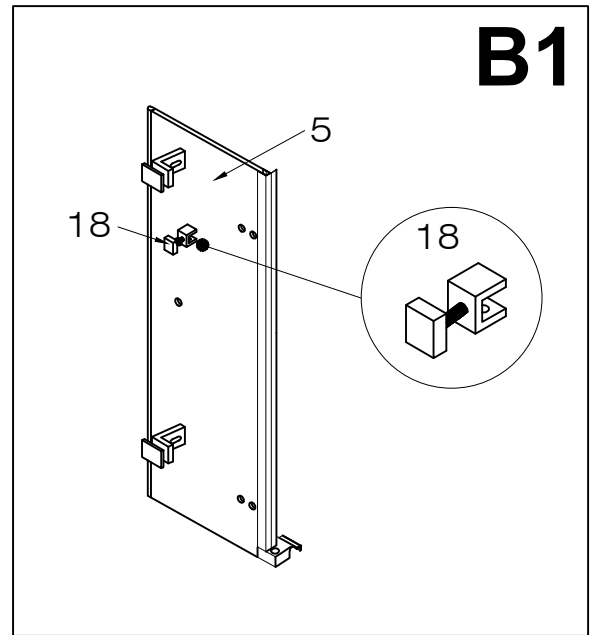


2. Slide the glass shelf (#19) into the holder and tighten the screw from underneath part (#18) to firmly hold the glass shelf in place.

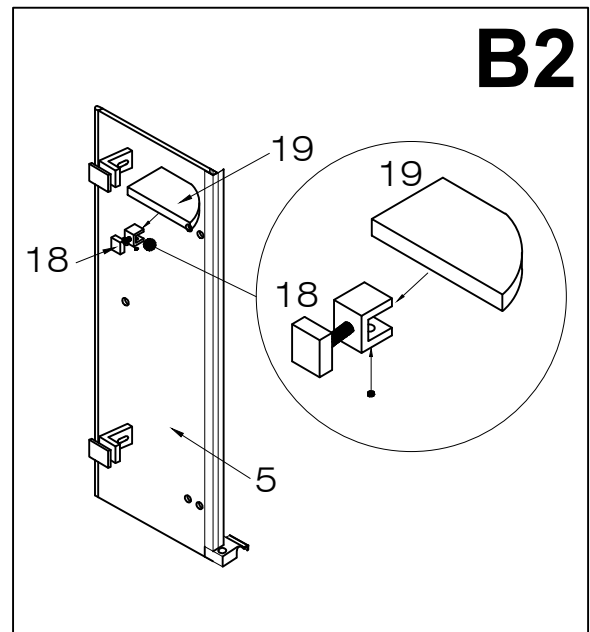


3. Use a level to make sure that the glass shelf is level against the wall. Mark holes on the wall for the mounting screws for the glass shelf holder (to wall) (#20).

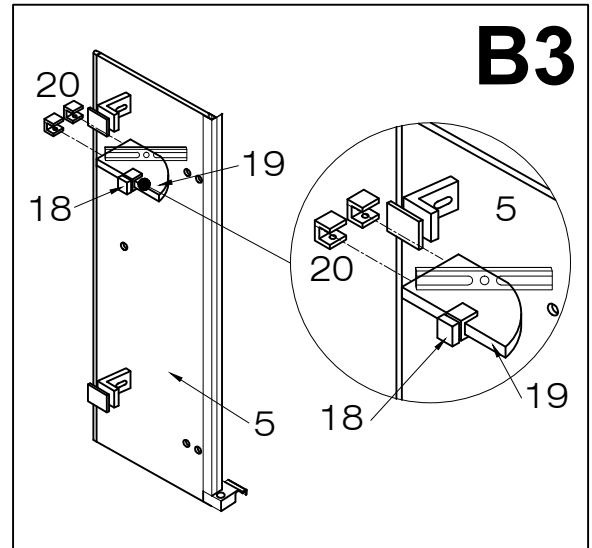


4. Loosen the screw of the shelf glass holder (#18) from underneath and remove the shelf glass (#19) from the big fixed panel. Drill holes into the wall where you marked. Insert plastic anchors (#14) into the holes.

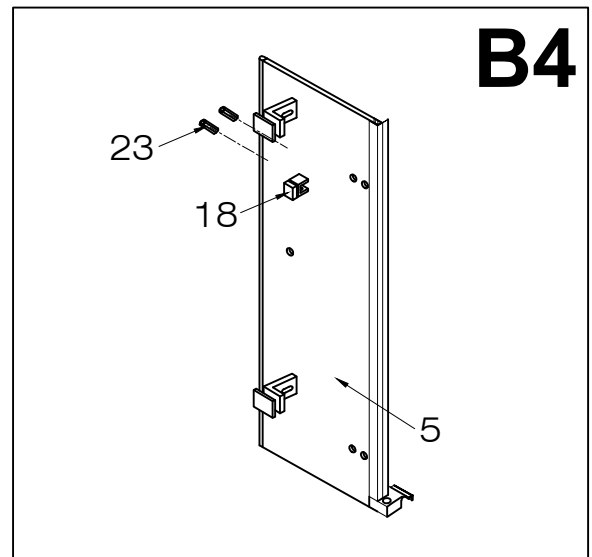

5. Install two shelf glass holders (#20) with 3/4" Phillips screws (#10).

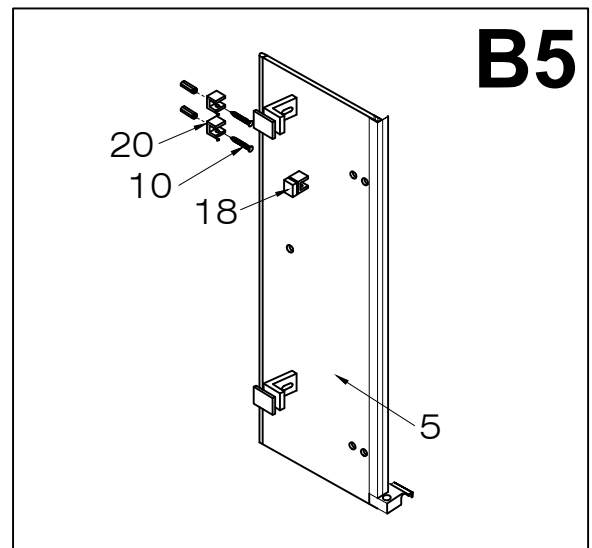


6. Slide the shelf glass (#19) into the three shelf glass holders (#18 and #20) and tighten the set screws from underneath. Repeat steps 1-6 to install the lower shelf glass.

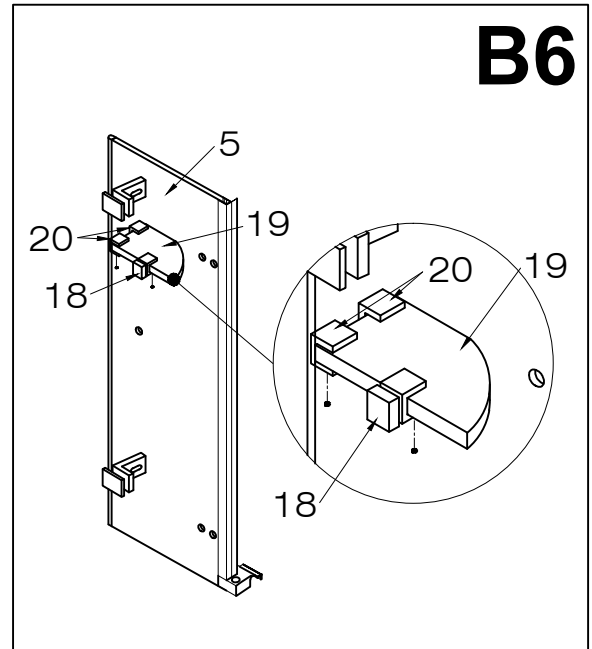


C. INSTALLING THE HINGE

1. Clean the glass surface on the big fixed panel (#5) where the hinges (#6) are to be installed with rubbing alcohol. Place gaskets on each side of the big fixed panel (#5). Position hinges on the big fixed panel (#5) as shown. Do not remove the plastic sleeves from the hinge screws. The metal should not rest on the glass. **There is a 1 1/2 inch horizontal adjustment built into the hinges for minor modifications.**

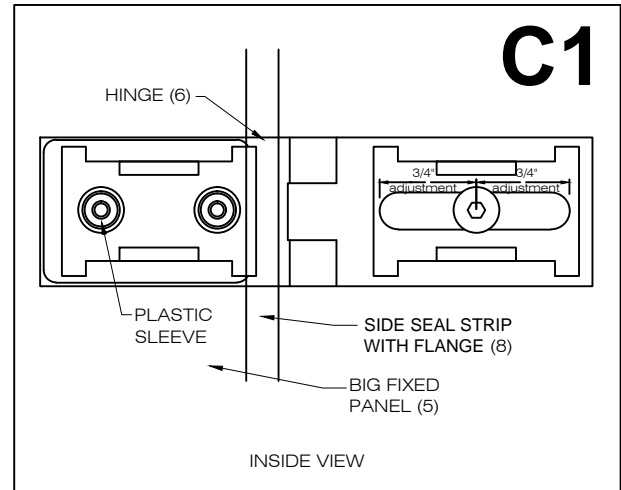


2. Screw the hinges (#6) to the big fixed panel (#5) with the hex key (supplied).

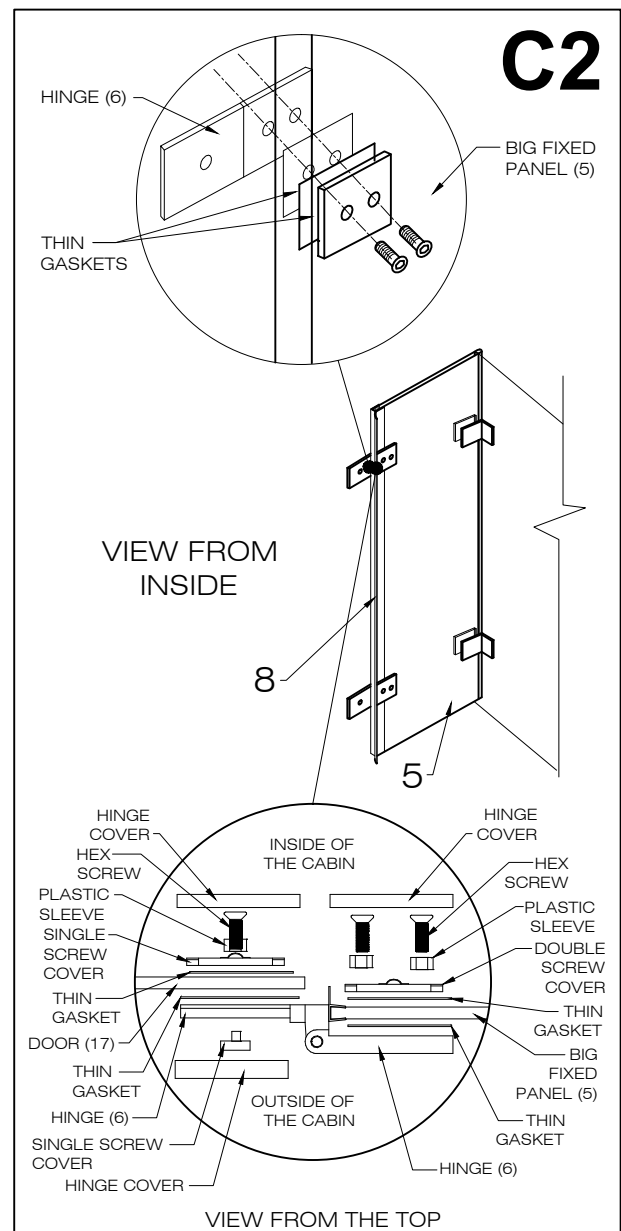


DOOR PANEL INSTALLATION REQUIRES TWO OR MORE PEOPLE TO ASSIST

D. INSTALLING THE DOOR


1. Clean the door panel (#17) edge where the hinge (#6) is to be installed with rubbing alcohol. Open the hinge to a 90° angle and place the door on a 7/8" shim (not provided). Install the top hinge first for safety and ease of install. Position the door onto the hinges. Hold securely in place using shims. The seal (#8) may get stuck between the two panels of glass. Pull the seal out of the groove using your fingers and nothing sharp, making sure not to damage the seal. Install the hinges as illustrated. Tighten hex screw into the plate. Use the allen key supplied. Adjust hinge so the gaps are equal at top and bottom and pull door panel away from big fixed panel (#5) to allow the door to swing freely without crimping seal strip (#8). **There is a 1 1/2 inch horizontal adjustment built into the hinges for minor modifications.**

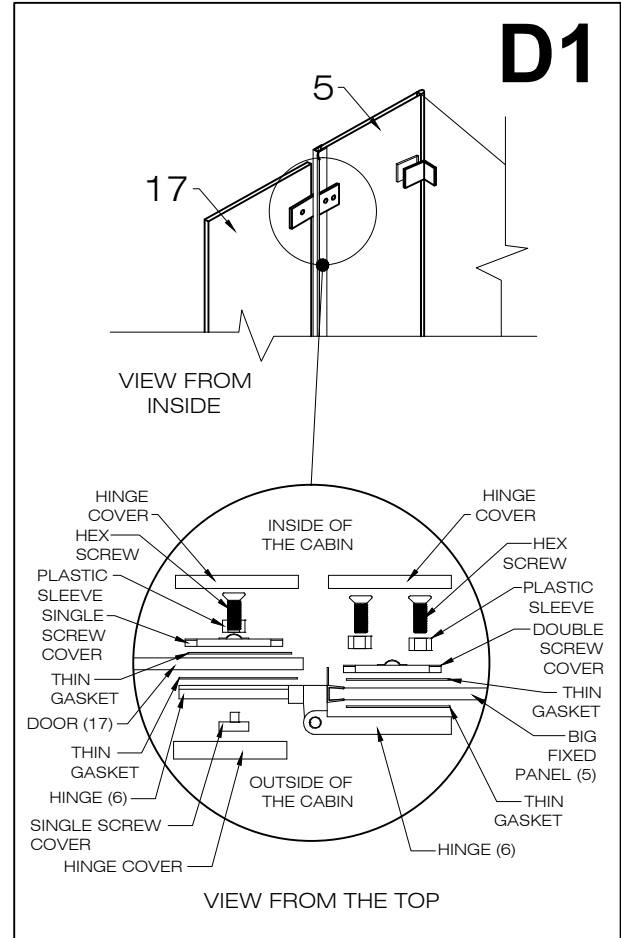


2. Lift door panel to be level with hinge panel.
NOTE - Screws have plastic sleeves to prevent metal to glass contact. Plastic sleeves prevent the door from sagging due to gravity and the weight of the door.
⚠ Never install without plastic sleeves, this can cause the glass to break causing property damage and bodily harm.

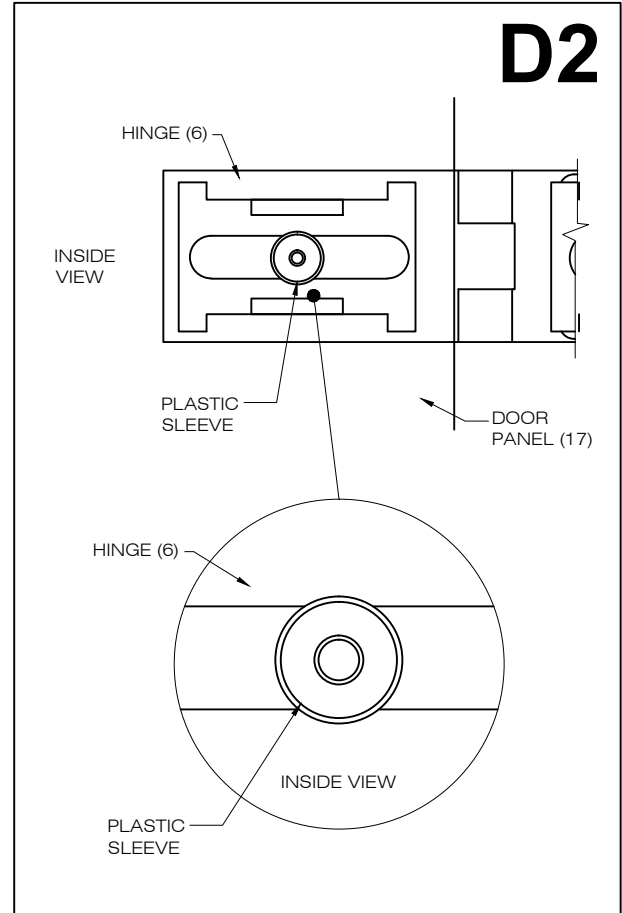

3. Make sure the door is level from the end. If the door is not level, adjust the hinge positions until the door is level. This being level is imperative to the installation and will guarantee a tight seal.

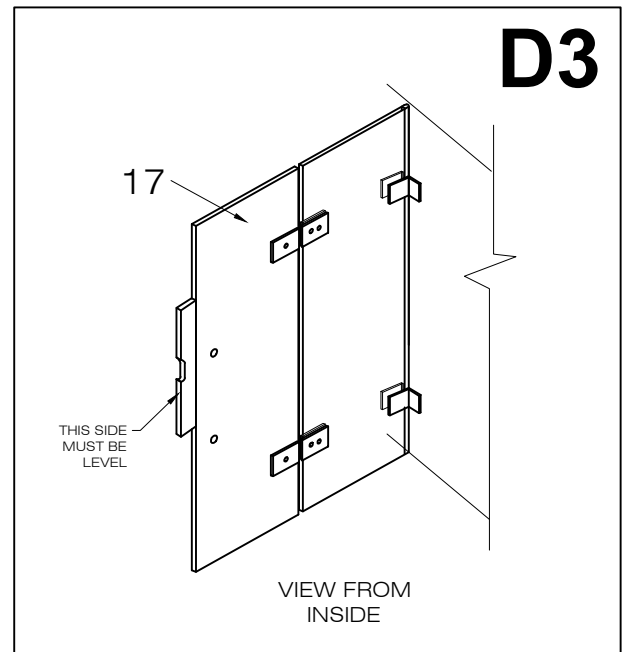


4. Clean the door (#17) glass surfaces where the magnetic seal strip (#16) is to be installed with rubbing alcohol. Place the magnetic seal strip (#16) to the door panel. The magnetic side should be facing the inside and the clear side be facing the outside. **⚠ Do not install the handle first, this is dangerous and may cause the glass to break.**

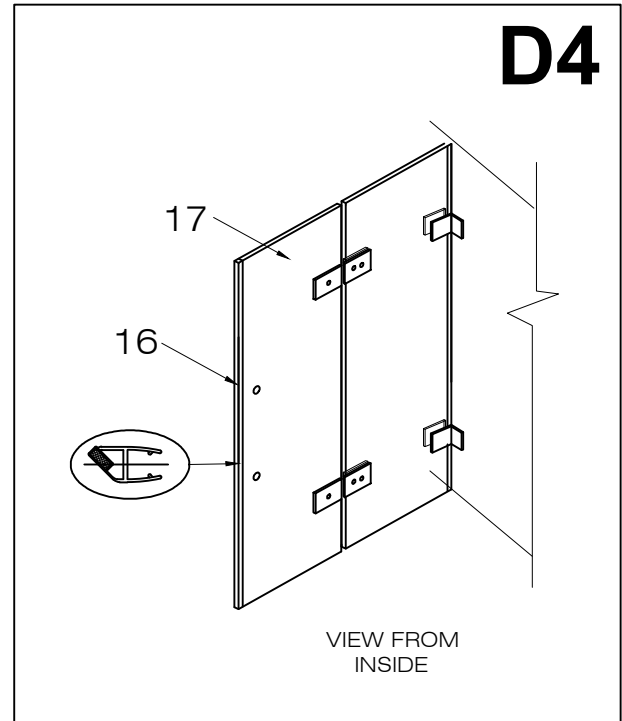


E. INSTALLING THE SMALL FIXED PANEL (#15)


1. Install the side seal strip (#4) to the wall side of the small fixed panel (#15).

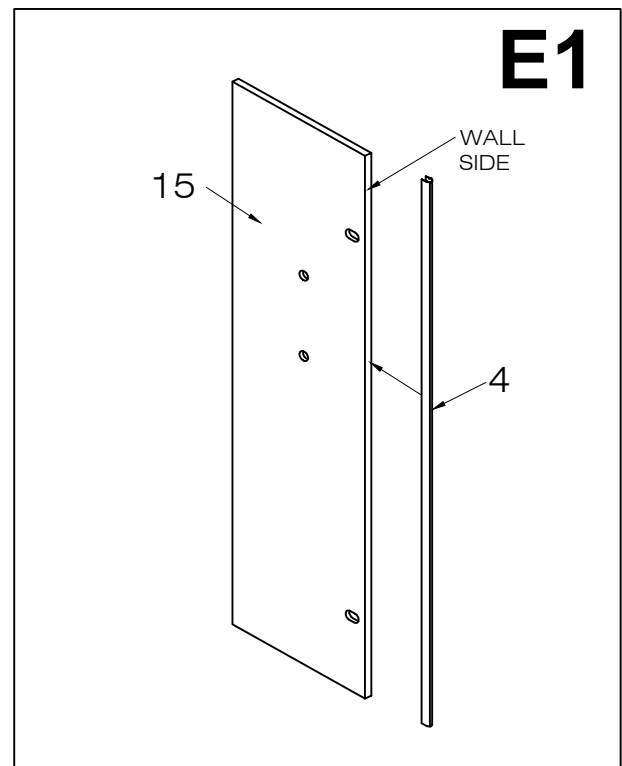


2. Screw in the glass supports (#1) with the hex key to the small fixed panel (#15). Be sure to use washers on both sides of the panel and make sure the glass shelf holes are closer to the top of the panel.

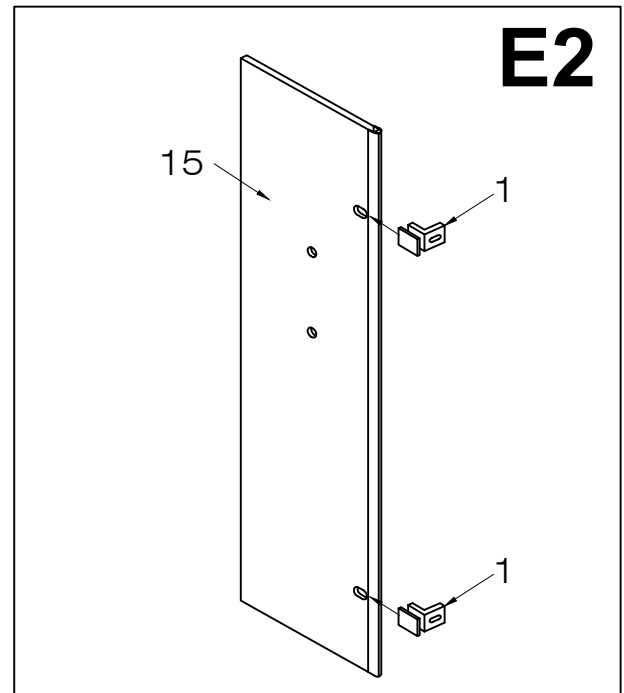


3. Install the magnetic seal strip (#16) onto the small fixed panel (#15). The magnetic side should be facing the outside and the clear side facing the inside.

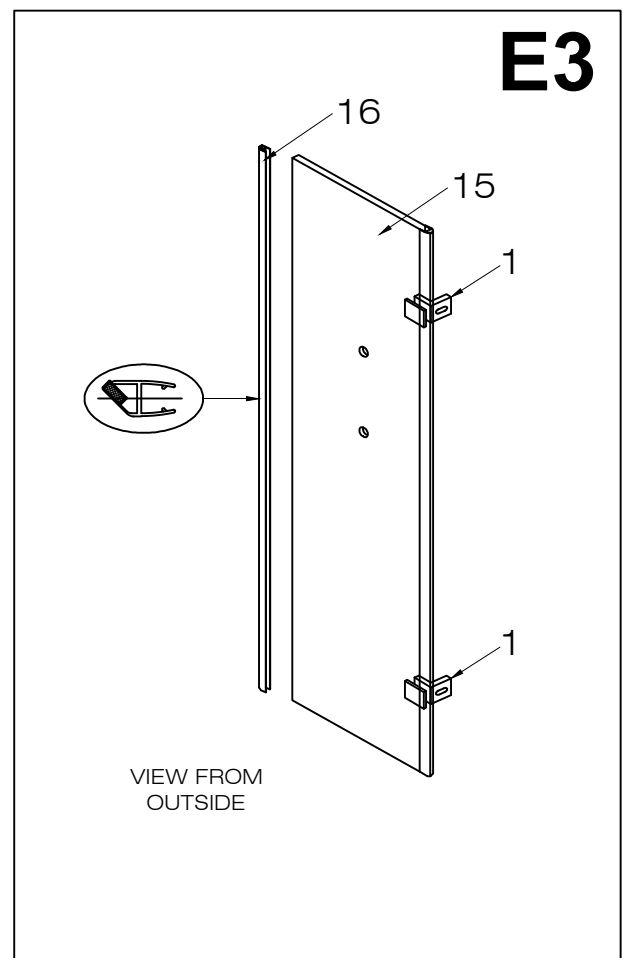


4. Arrange the small fixed panel (#15) in alignment with the door panel (#17) by attaching the magnetic seal strips to one another (#16). Keep both panels perpendicular to the walls. **NOTE: One person should be holding the small fixed panel and door panel closed (with the magnetic seal strips on) while the other person slides them towards the wall until the glass supports meet the wall. This will ensure a proper seal. If the door and small fixed panel pull away at the seal, then it is recommended to modify the position of the glass supports along the glass or thickness of gaskets between the wall and glass supports. This is done by adding or removing the clear PVC gaskets and sliding the glass support, in a perpendicular direction closer or further from the wall.**

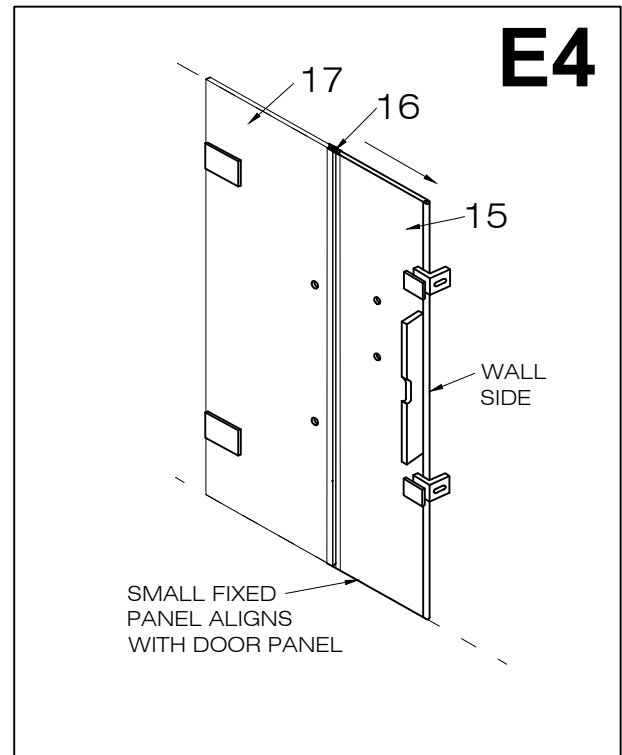


5. Mark holes on the wall for the mounting screws for the glass supports (#1).

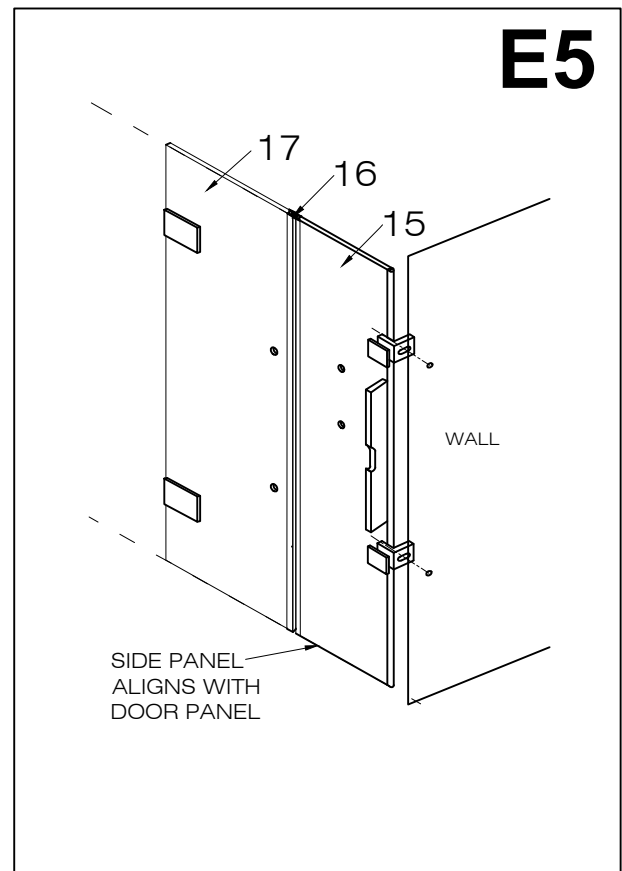


6. Remove the small fixed panel (#15) and drill holes into the wall. Insert plastic anchors (#2) into the holes.

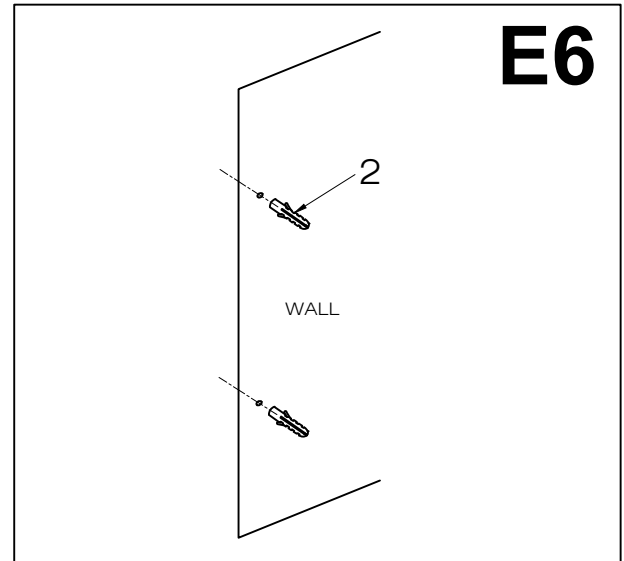

7. Replace the small fixed panel (#15). Screw into the wall with 1 5/8" hex screws (#3).

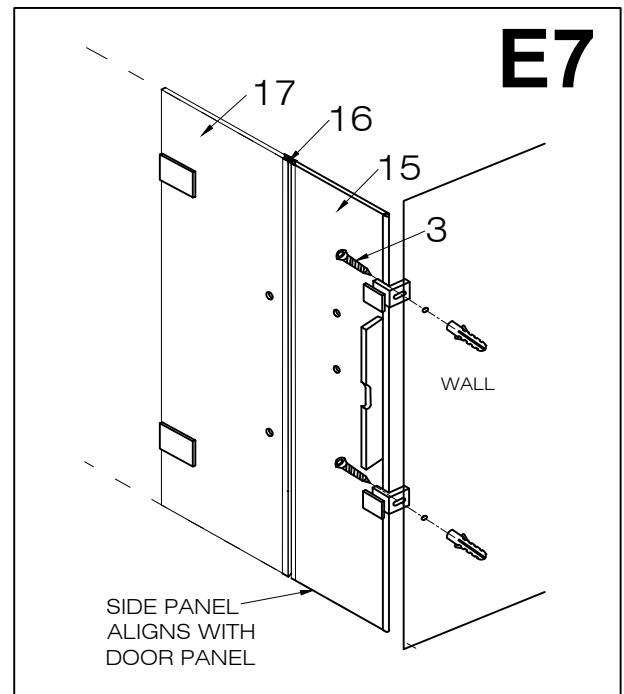


8. Remove the magnetic seal strip (#16) from the small fixed panel (#15) and position the right threshold clip (#12) at the bottom of the small fixed panel (#15). Mark the location for the mounting hole.

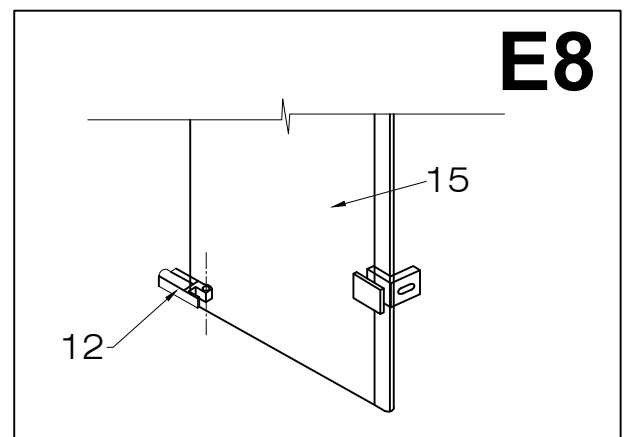


9. Remove the right threshold clip (#12). Move the small fixed panel (#15) slightly out of the way and drill a hole into the respective mark then put a plastic anchor (#14) in it.


⚠ Not necessary if installing into studs. Studs are the preferred means of installation, anchors can pull out of the wall causing property damage and bodily harm.

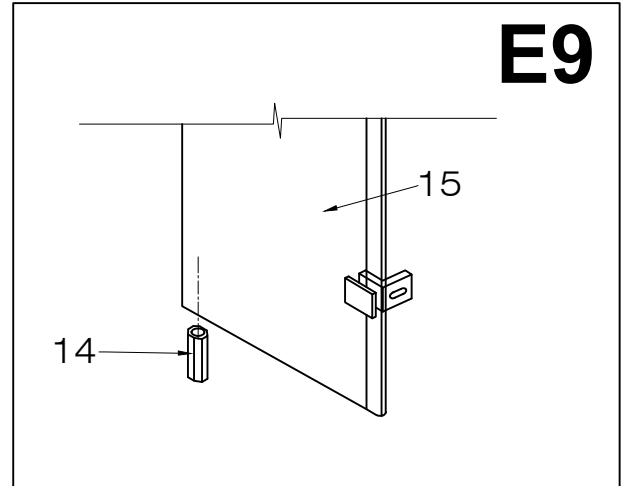

10. Replace the right threshold clip (#12) and small fixed panel (#15) to the proper position. Screw it into the floor with a 3/4" Phillip screw (#10).

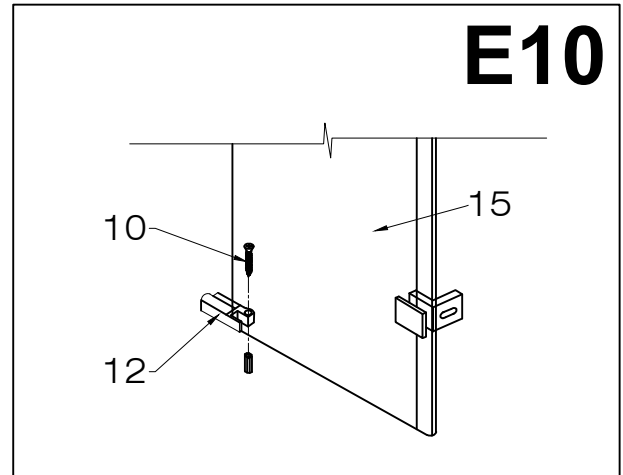


11. Replace the magnetic seal strip (#16) to the small fixed panel (#15). The bottom should rest on the right threshold clip (#12).

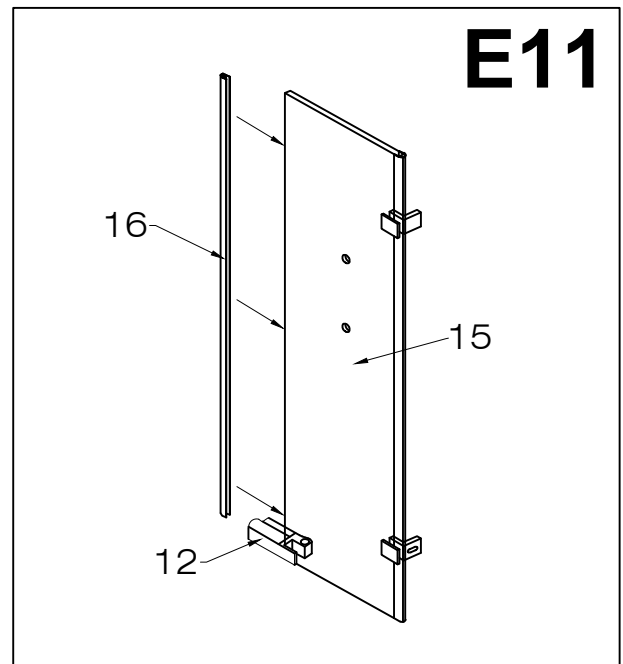


F. INSTALLING THE GLASS SHELVES


1. Unthread the shelf glass holder cap (#18), insert threaded portion of shelf glass holder into the hole of the small fixed panel (#15) and then thread the holder cap back on. The upper glass shelf should be installed first.

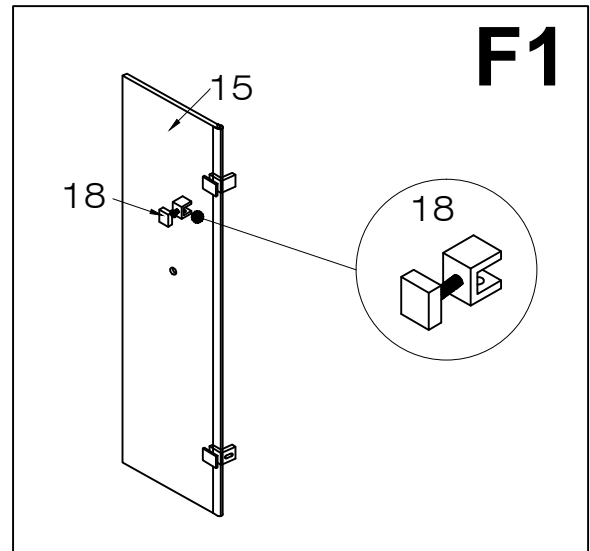


2. Slide the glass shelf (#19) into the holder and tighten the screw from underneath part (#18) to firmly hold the glass shelf in place.

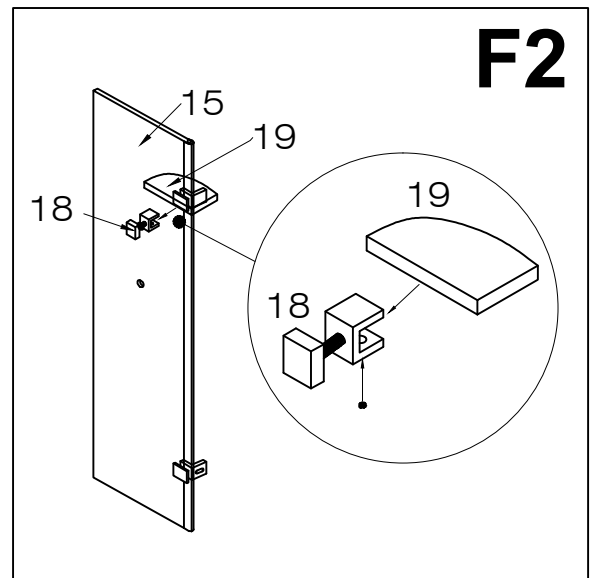


3. Use a level to make sure that the glass shelf is level against the wall. Mark holes on the wall for the mounting screws for the glass shelf holder (to wall) (#20).

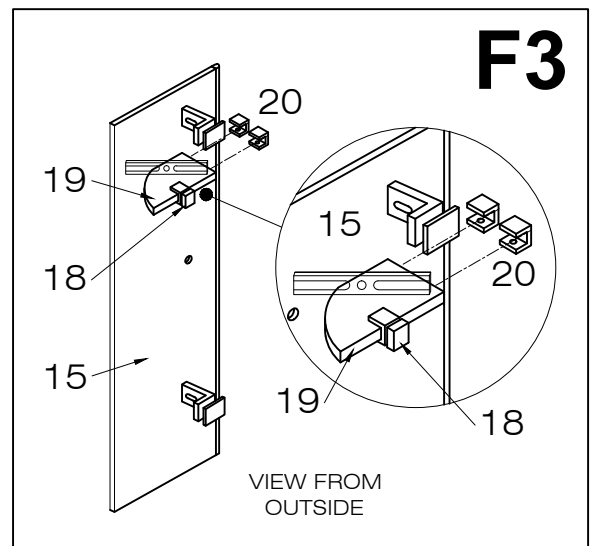


4. Loosen the screw of the shelf glass holder (#18) from underneath and remove the shelf glass (#19) from the small fixed panel. Drill holes into the wall where you marked. Insert plastic anchors (#14) into the holes.

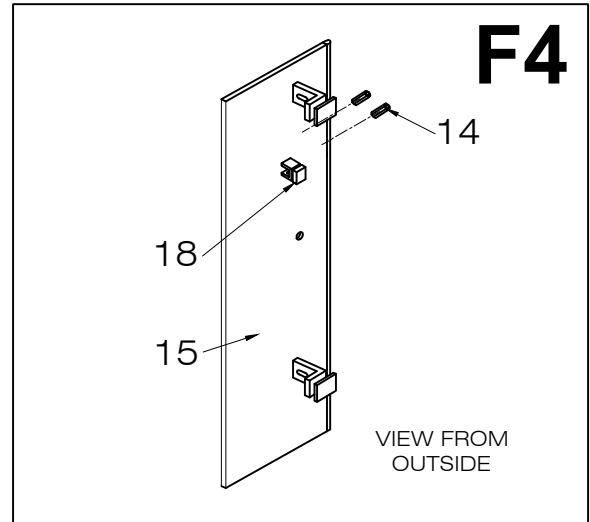

5. Install two shelf glass holders (#20) with 3/4" Phillips screws (#10).

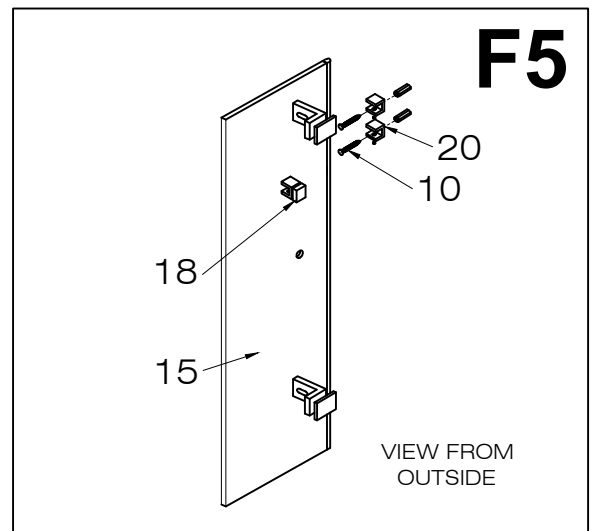


6. Slide the shelf glass (#19) into the three shelf glass holders (#18 and #20) and tighten the set screws from underneath. Repeat steps 1-6 to install the lower shelf glass.

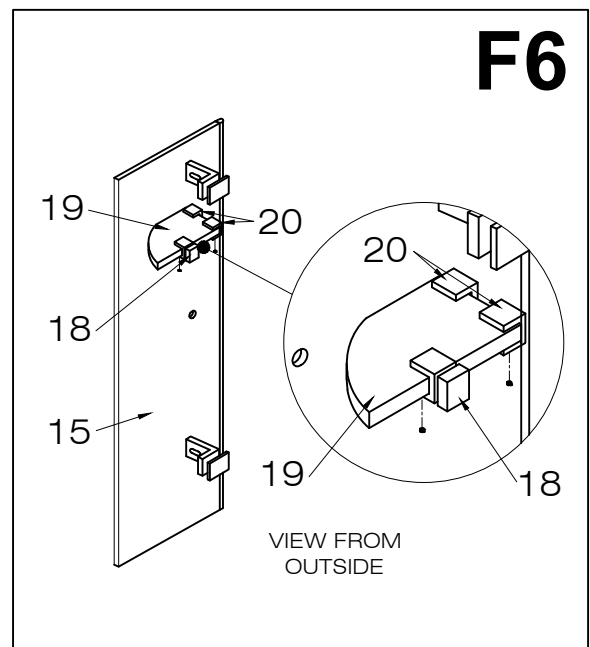


G. INSTALLING THE HANDLE

1. Assemble the door handle (#21) to the door (#17). Place the outside handle on the outside of the door and the inside handle on the inside, making sure to have a clear gasket between each handle and the glass. From the inside, screw the handles together with the provided screw. Once tight, place the plastic cap in the hole to cover the screw.

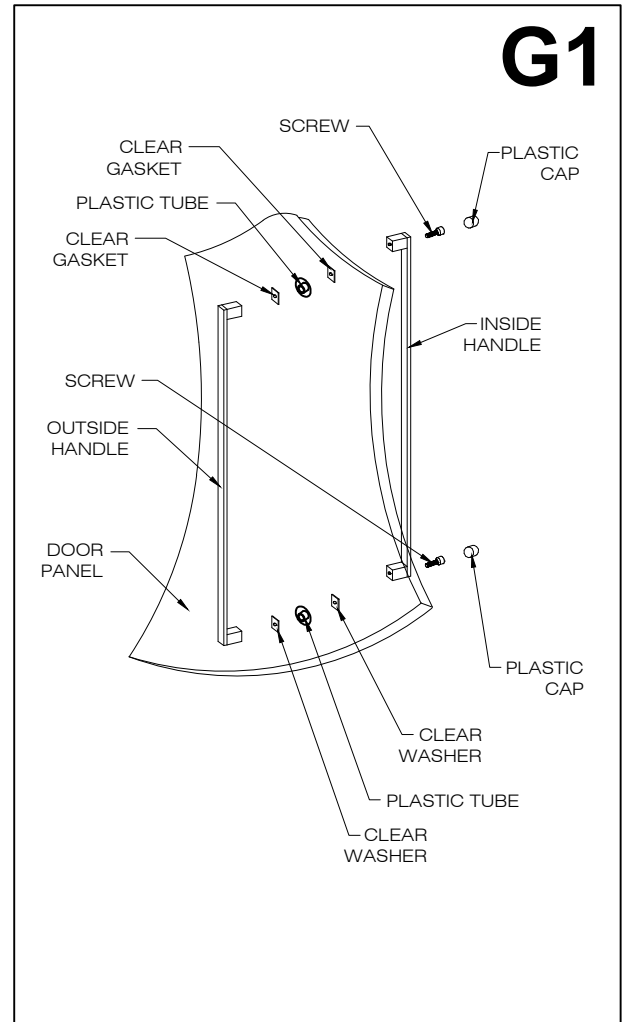

H. INSTALLING THE THRESHOLD

1. Slide the door threshold (#13) into the left threshold extended clip (#23) and right threshold clip (#12). You will have to loosen one clip or the other to get the threshold into both clips. Once the threshold is in place, tighten the clips.

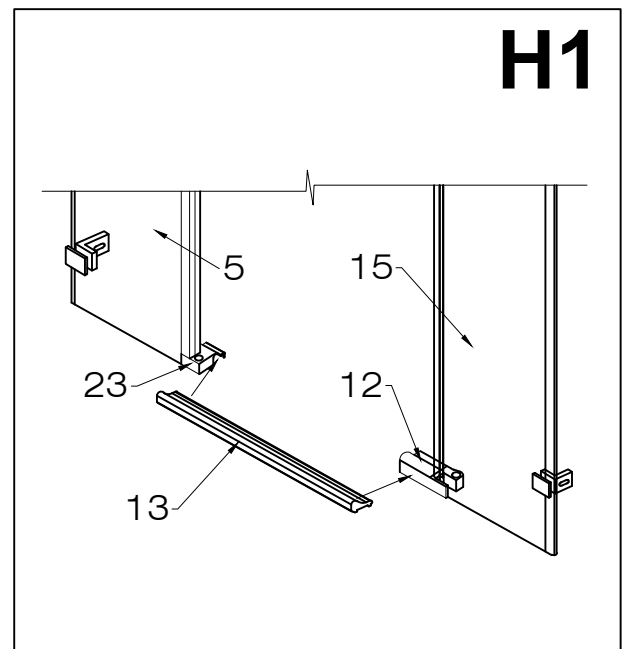


I. INSTALLING BOTTOM DOOR SEAL STRIP

1. Clean the door glass panel (#17) edge where the door bottom side seal strip (#9) is to be installed with rubbing alcohol. Verify that the soft flange of the seal strip faces toward the inside of the shower cabin before seal strip installation.


NOTES:

1. If the seal strip is not flat, use a hair dryer to apply minimal heat and press the seal strip back into position.
2. Adjust the magnetic seal strip (#16) to the correct height over the door bottom seal strip (#9) and cut to the needed height at the top of the panel.

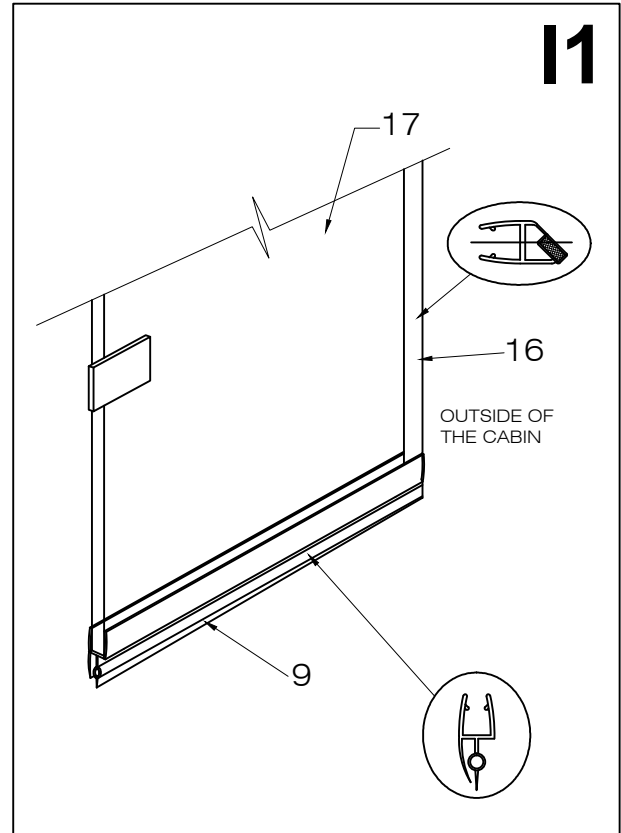


J. INSTALLING COVERS

1. Install the 10mm plastic covers (#22) to the handle (#21) as shown. Install the 8mm plastic covers (#7) to the left threshold extended clip (#23) and the right threshold clip (#12) as shown. Install glass support covers to the glass supports (#1).

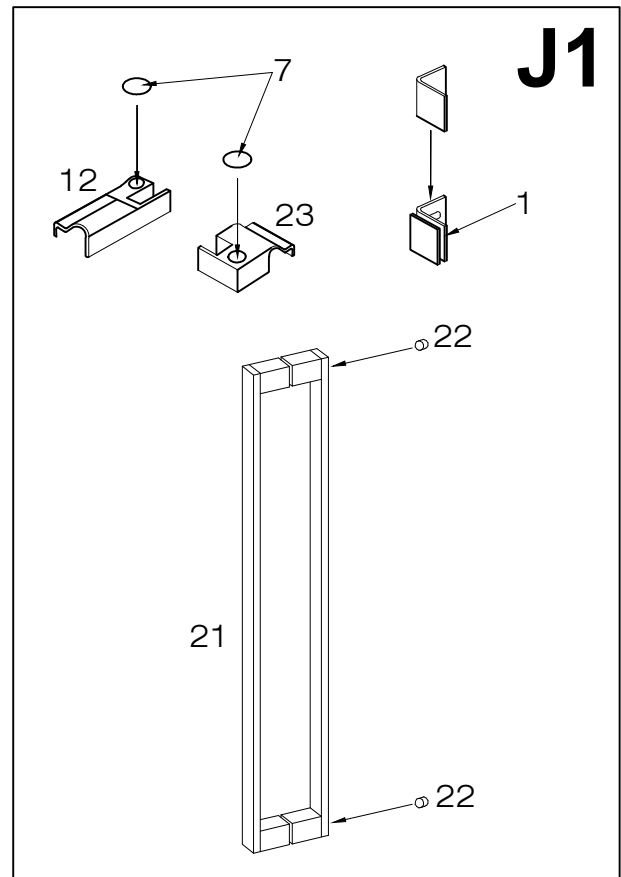

K. APPLYING THE SILICONE

1. Apply clear silicone caulking to the inside between the walls and the side seal strips (#4). Apply clear silicone caulking to the inside between the floor and the big fixed panel (#5) and small fixed panel (#15). Continue applying the silicone caulking along the threshold (#13) to seal any place that may cause leaking.

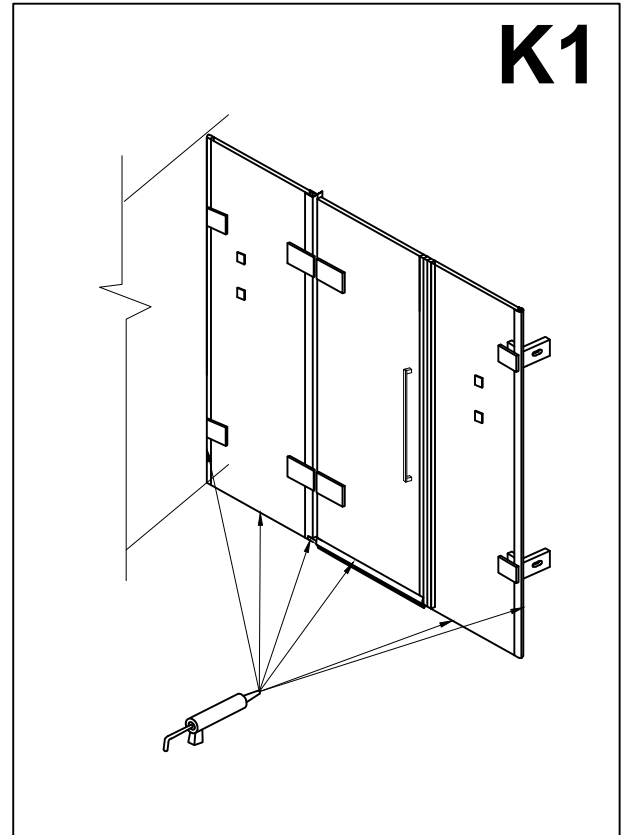

⚠ IMPORTANT

- WAIT 24 HOURS BEFORE USING SHOWER
- DO NOT ALLOW WATER TO DIRECTLY HIT DOOR SEAL STRIPS.

CLEANING INSTRUCTIONS FOR THE SHOWER CABIN AND DOOR PANEL

1. Use a mild liquid household cleaner to keep metal surfaces bright and clean. Rinse well and dry with a soft, clean cloth.
2. Remove dust with a soft, damp cloth.
3. Use a standard household window cleaner to clean the glass panels.
4. A water beading treatment, similar to what you would use on an automobile windshield, can be used on the inside of the glass to keep it looking brand new.
5. Use rubbing alcohol to clean and remove grease, oil, paint and ink.
6. Should you accidentally scratch or stain your shower enclosure, use a liquid automobile polish to remove.

⚠ IMPORTANT

1. DO NOT use abrasive cleaners, scrapers, metal brushes or any items that could scratch or dull the surface.
2. DO NOT allow surface to come in contact with acetone (nail polish remover), dry cleaning solution, lacquer thinner, gasoline or other similar products.

REGULAR CARE AND MAINTENANCE OF YOUR VIGO SHOWER ENCLOSURE

Your home is a moving entity, shifting and settling over time. Vigo understands this and has designed their shower enclosures with this in mind. It is the responsibility of the homeowner or end user to maintain the integrity of their newly installed enclosure, using the integrated adjustability features. In order to keep your shower enclosure in optimal working condition, Vigo recommends regularly inspecting your enclosure and tightening any hardware that may have loosened during use. This simple step will insure optimal results from your Vigo shower enclosure for many years to come.

EFFECTIVE JANUARY 1, 2010

VIGO offers the following limited warranty on each of its Shower Enclosure products* (the "Product") and the components thereof. This warranty extends only to the original owner or end-user for personal household use. For commercial uses, additional limitations apply.

VIGO warrants the structural glass component of the Product to be free from defects in workmanship and materials under normal use and service for the period commencing from the initial date of purchase by the owner or end-user, contractor, or builder, from VIGO or an authorized VIGO dealer, through the lifetime of the original owner or end-user.

VIGO warrants the hardware components of the Product to be free from defects in workmanship and materials under normal use and service for a period of two (2) years from the initial date of purchase by the owner or end-user, contractor, or builder, from VIGO or an authorized VIGO dealer.

VIGO warrants the seal strip components of the Product to be free from defects in workmanship and materials under normal use and service for a period of one (1) year from the initial date of purchase by the owner or end-user, contractor, or builder, from VIGO or an authorized VIGO dealer.

Subject to the Warranty Service provision below, any product reported to the authorized dealer or to VIGO as being defective within the warranty period will be repaired or replaced (with a product of equal value) at the option of VIGO. This warranty extends to the original owner or end-user and is not transferable to a subsequent owner.

Neither the distributor, authorized VIGO dealer, nor any other person has been authorized to make any affirmation, representation, or warranty other than those contained in this warranty. Any affirmation, representation, or warranty other than those contained in this warranty shall not be enforceable against VIGO or any other person.

VIGO reserves the right to modify this warranty at any time, it being understood that such modifications will not alter the warranty conditions applicable at the time of sale of the products in question.

Limitations

This warranty shall not apply to instances of incorrect operating procedures, breakages, or damages caused by fault through improper installation, carelessness, abuse, misuse, misapplication, improper maintenance, or alteration of the Product, as well as chemical or natural corrosion, accident, fire, flood, an act of God, or any other casualty. Avoid abrasive cleaners, steel wools, and harsh chemicals as these will scratch, damage, and / or dull the product and / or finish and void this warranty. The owner/end-user of the Product covered by the present warranty is entirely responsible for its proper installation and any applicable plumbing or electrical wiring. VIGO neither installs nor supervises the installation nor hires a contractor for this purpose; consequently, VIGO cannot be held responsible for any default, breakage, or damages caused thereby or resulting thereof, either directly or indirectly.

The owner/end-user must provide access to the components of the Product as described in the installation guide so that VIGO can execute the warranty specified herein. If such access is not available, all expenses to provide said access will be the responsibility of the owner/end-user.

This warranty does not apply to Products that have not been installed or operated in accordance with instructions supplied by VIGO and all applicable rules, regulations, and legislation pertaining to such installations.

This warranty does not apply unless the VIGO Product is installed by fully insured licensed professionals. VIGO strongly recommends that such licensed professionals have experience in the installation of bathroom and kitchen products. Installation of certain products, including, without limitation, glass products (i.e., shower doors and glass sinks) by an inexperienced person may result in glass breakage and, consequently, cause personal injury or death.

VIGO is not liable for personal injuries or deaths to any persons or for any direct, special, incidental, or consequential damage, loss of time, loss of profits, inconvenience, incidental expenses, labor or material charges, or any other costs resulting from the use of the product or equipment or pertaining to the application of the present warranty, or resulting from the removal or replacement of any product or element or part covered by this warranty.

EXCEPT AS OTHERWISE PROVIDED ABOVE, VIGO MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE OR COMPLIANCE WITH ANY CODE.

In any case, VIGO cannot be held liable for any amount over and above the purchase price paid for the Product by the owner/end-user, contractor, or builder.

Commercial Limitations

In addition to the above conditions and limitations, the warranty period for products installed for commercial applications or used in commercial ventures is one (1) year from the initial date of purchase by the owner/end-user, contractor, or builder from an authorized dealer. VIGO is not responsible for loss of use or profit under any circumstances. If the product is used as a display, the warranty period begins when the product is placed on display. This warranty gives the owner/end-user specific legal rights. The owner/end-user may also have other rights which can vary from one state or province to another.

Warranty Service

In order to obtain service provided under this warranty during regular business hours, contact the dealer or distributor who sold the unit, or contact VIGO directly. VIGO will provide the warranty service described above when the following conditions have been met: the failure is of the nature or type covered by the warranty; the user has informed an authorized VIGO Agent or VIGO's warranty service department representative of the nature of the problem during the warranty period; conclusive evidence (e.g., proof of purchase or installation) is provided to the foregoing by the user proving that the failure occurred or was discovered within the warranty period; an authorized independent service person or company representative has been permitted to inspect the product during regular business hours within a reasonable time after the problem was reported by the user. VIGO's warranty obligation shall be discharged upon tender of replacement or repair. The customer's refusal to accept the tender terminates VIGO's warranty obligations.

*Certain models are pending approval.

Certification may be ended by VIGO or certification agencies without notice.