


Assembly Instruction Sheet #IS-5635P21ST For Style 5635P21ST


Tools Required: Flathead screwdriver, Phillips screwdriver, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (3) 120V LED 62W DIMMABLE (4000K)
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Warnings and Cautions
 Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.
 These instructions are provided for your safety. It is very important you read them completely before installing the fixture.
 We strongly recommend that a licensed, professional electrician perform the installation.
 Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.



Package Contents

STEP 2 – Attach Crossbar to Outlet Box.
 Attach the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box (CC) with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.




Supply Wires with Outlet Box Screws Ground Wire


Hardware Contents

PART	DESCRIPTION	QUANTITY
BB	Electrical Nuts	2pcs
CC	Outlet Box Screw	2pcs
EE		CC


STEP 1 – Attach Mounting Screws, Lock Washers and Hex Nuts to Crossbar.
 A. Line up a set of holes on Mounting bracket (EE) and Holes on the ceiling canopy. Thread Mounting Screws (DD) into the holes on the Mounting bracket (EE). Pass Lock Washers and thread Hex Nuts onto the Mounting Screws (DD). Hand tighten until snug.




STEP 3 – Fit Ceiling Canopy to Crossbar Assembly
 A. Fit the ceiling canopy to Mounting Screws (DD) and secure with Decorative Caps (AA). Note: The ceiling canopy should be snug against the ceiling and the Decorative Caps (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the ceiling canopy is secure, remove the Decorative Caps (AA) and ceiling canopy and proceed to Step 4.



STEP 4 – Wire Connections
 A. Use standard wire connectors (not included) to make all wire connections. Twist each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

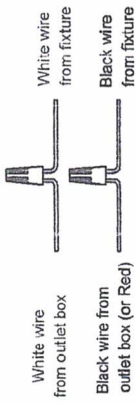


White wire from outlet box
 Black wire from outlet box (or Red)
 White wire from fixture
 Black wire from fixture

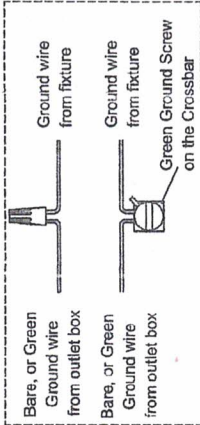

Bare, or Green Ground wire from outlet box
 Bare, or Green Ground wire from fixture
 Green Ground Screw on the Crossbar

STEP 5 – Install Ceiling Canopy to Ceiling

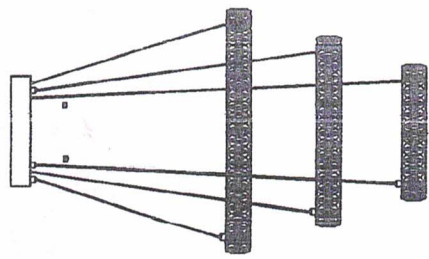

WARNING
THIS FIXTURE IS VERY HEAVY AND NEEDS TO BE REINFORCED ACCORDINGLY