

PRODUCT NAME: Meteor ITEM NUMBER: 32505BCPC

## Please consult your electrician for hanging fixture and wiring.

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

The above belongs in box with recommended drivers.

Below is a list of recommended dimmers:

Lutron MACL-153M

Lutron DVL-153P

Lutron SCL-153P

Leviton IPL06-10Z


Leviton 6674-POW


Due to inrush current wattage should not exceed 150 watts of product a 600 watt dimmer.

WARNING:WIRES NEED TO BE CONNECTED TO DRIVER FOUND IN CANOPY AND SHOULD NOT CONECT DIRECTLY TO POWER SOURCE OR A SHORT MIGHT OCCUR.


20W LED


IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation






Locate all hardware & components before discarding packaging

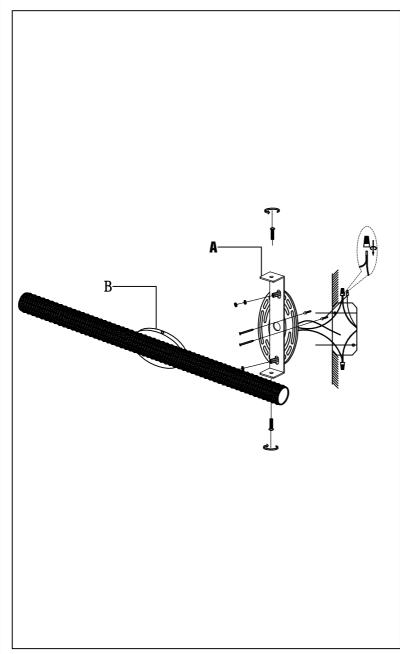




Step.1: Remove mounting bracket (A) from fixture and install to electrical box.



Step.2: Wire fixture to wires in outlet box. Install green wire is for Ground.



Step.3: Install Body(B) to Canopy(A) and tighten screws at the ends of the canopy to secure.

Cleaning & Care:

Clean with soft cloth and a mild detergent.

Do not use abrasive cleaner.