

Features

- 1/2" NPT connections
- 2.5 gallons (9.5 L) per minute maximum flow rate at 80 psi (552kPA)
- Available as a 54-nozzle with soothing spray [K-8002] or a 22-nozzle with stimulating spray [K-8003]
- Low profile design complements any décor
- Fully adjustable, pivoting MasterClean™ sprayface

Recommended Products/Accessories

K-8002 54-Nozzle Body Spray

K-8003 22-Nozzle Body Spray



Codes/Standards

ASME A112.18.1/CSA B125.1












DOE - Energy Policy Act 1992

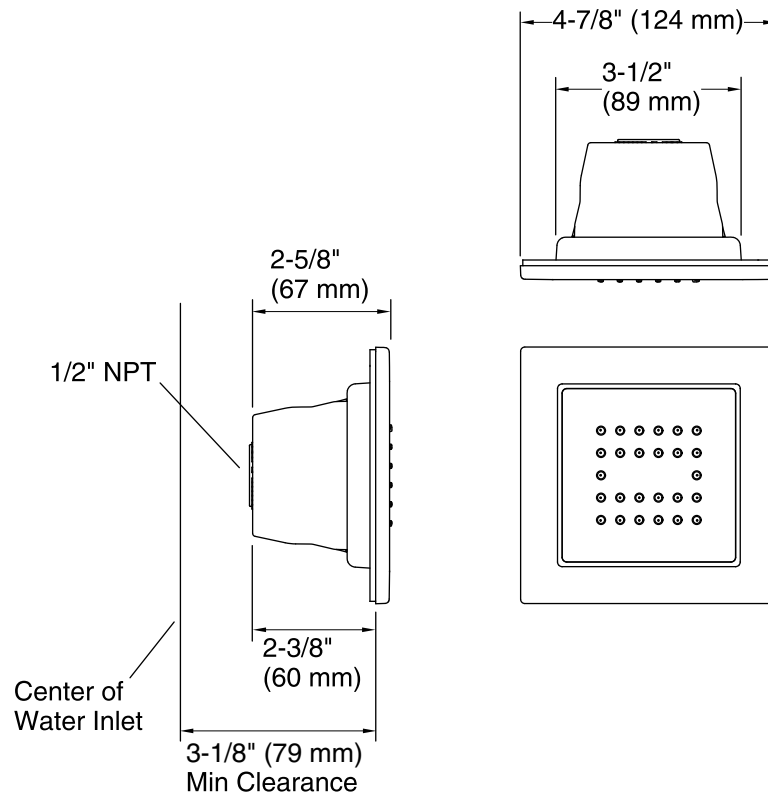
KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	PGD	Vibrant® Moderne Polished Gold
	BGD	Vibrant® Moderne Brushed Gold
	G	Brushed Chrome
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze
	TT	Titanium
	VNT	Vintage Nickel



Technical Information

All product dimensions are nominal.

Notes

Install this product according to the installation instructions.