










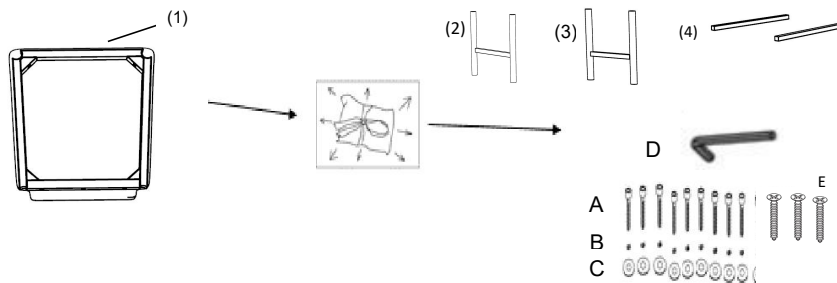
ASSEMBLY INSTRUCTIONS

3900095


Item	Parts	Picture	Qty
1	Seat		1
2	Back Legs		1
3	Front Legs (with metal foot plate)		1
4	Side rail		2

Item	Hardware	Picture	Qty
A	Bolt	 $\phi 5/16'' \times 2''$	9
B	Spring washer		9
C	Flat washer		9
D	Allen wrench		1
E	Screw	 M5x50mm	4

Step 1 : Take off the hardware bag from the bottom of seat.



Step 2 : Using bolts (A), spring washers (B), flat washers (C) to connect seat (1) to Back leg (2) and front Leg (3). Pls do not tighten bolts (A) with Allen Key (D) very well.

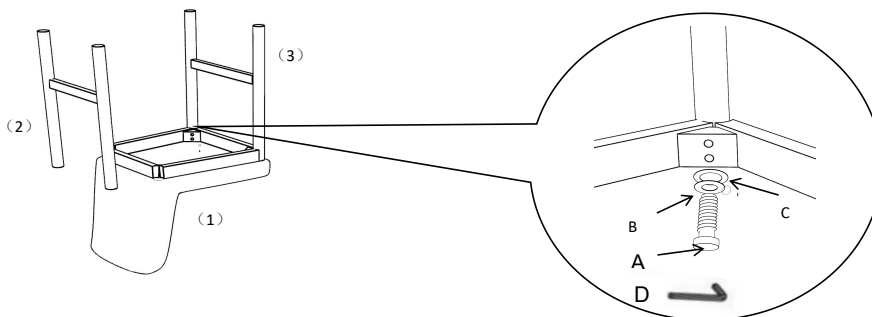

Step 3 : Insert the side rail (4) between the front leg (3) and back leg (2) , Tighten the all the Bolts (A) in the step 2 well. Then use the driver to tighten the screws (E).

