


Diagram A

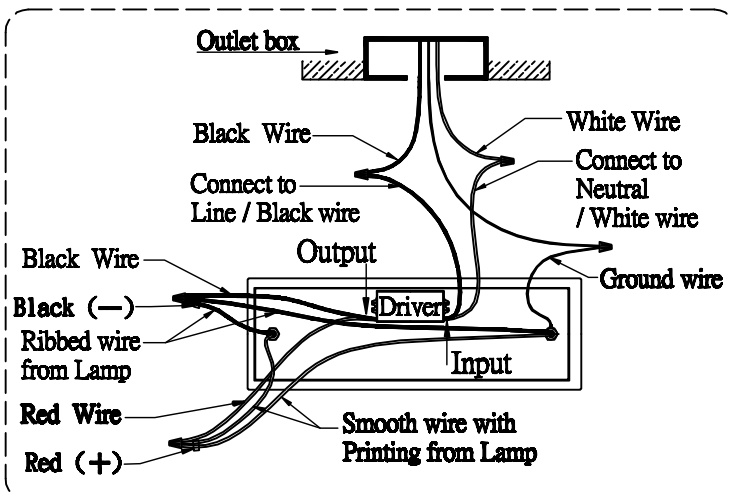

Turn off power at breaker for outlet fixtures is being installed to.

1. Install Crossbar Assembly to outlet box using Machine screw
2. Assemble the fixture per Diagram B.
3. Add 6" and 12" rod to the fixture to your desire height
4. Wire fixture assembly per Diagram A
5. Install fixture assembly to Crossbar assembly and secure with Hex Nut and finial per Diagram B
6. Install bubble glass into glass holder and tighten plastic screw to secure
7. Insert glass holder into fixture casting
8. Insert glass cylinder into fixture casting*

*Pull out tension tabs to increase stability of glass cylinder if necessary

Diagram B

