

Project:

Type:

Quantity:

Note:

SKU#: NAN - 36 -      -      - 30K -     

## Description

Nano vanity lights represent extraordinary value. The super-efficient LED light source inside the minimal geometric form illuminates the white frosted acrylic diffuser.

## Features

- Stamped steel construction
- Frosted acrylic extruded diffuser
- Driver located in backplate of fixture
- Damp location rated
- JA8-2016 listed



**QUICK  
SHIP** | AVAILABLE  
IN 2 WEEKS  
Deep Backplate  
Polished Chrome or Satin Silver  
12T Triac  
Option Only


## Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Fixture Wattage: 28W
- Input Voltage: 120VAC 50/60Hz
- Delivered Lumens: 1279 Lm (measured at 3000K)
- Fixture Weight: 8.4lb (3.8kg)
- Backplate: DB - Deep backplate (standard) 4.6"H, 4.6"W, 1.3"D
- Dimming: TRIAC dimmable
- For recommended dimmers, see <http://www.blackjacklighting.com>


## Options

- Upgradable to 120-277V input driver with Universal Dimming
- Available in 2700K, 3000K, 3500K, and 4000K Color Temperatures
- Standard Finishes: PC - Polished Chrome, SN - Satin Nickel
- Special Order Powder Coat Finishes: BL - Matte Black, BZ - Bronze, SG - Satin Gold, or SS - Satin Silver
- Backplate: S4 - Shallow backplate 4.6"H, 4.6"W, .5"D

## Dimensions

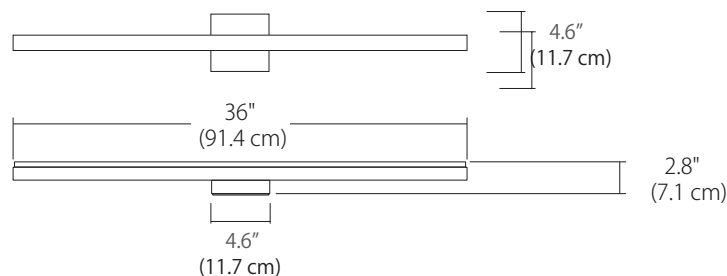

(Shown above with standard Deep Backplate)

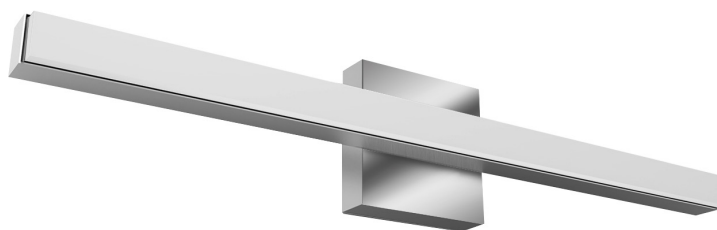


NAN-36V-PC-12T-30K-SO-DB

## ORDERING GUIDE

Family	Size	Finish	Volts/Dimming	Color Temp.	Backplate
<b>NAN</b>	<b>36V</b>			<b>30K</b>	
NAN Nano	36V 36" Vanity	<b>Standard</b> <b>PC</b> Polished Chrome <b>SN</b> Satin Nickel <b>Special Order</b> <b>BL</b> Matte Black <b>BZ</b> Bronze <b>SG</b> Satin Gold <b>SS</b> Satin Silver	<b>12T</b> 120VAC TRIAC Dimming <b>27U</b> 120-277VAC Universal Dimming  <b>(12T Standard)</b>	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K  <b>(30K Standard)</b>	<b>DB</b> Deep Backplate (Standard) (Driver located in backplate) <b>S4</b> 4.6" Shallow Backplate (Driver located inside junction box)  <b>(DB Standard)</b>

Example: NAN-36V-PC-12T-30K-S4

## Finish



PC SN BL BZ SG SS

## Standard Finishes



**PC**  
Polished Chrome



**SN**  
Satin Nickel



**BL**  
Black



**BZ**  
Bronze




**SG**  
Satin Gold



**SS**  
Satin Silver

## Special Order Powder Coat Finishes

## Volts/Dimming



12T 24U

**12T** Input: 120V, Dimming: TRIAC (Standard)

**27U** Input: 120–277V, Dimming: TRIAC / ELV / 0–10V (Special Order)

## Color Temperature



27K 30K 35K 40K



**27K** 2700K

**30K** 3000K (Standard)

**35K** 3500K

**40K** 4000K


## Front Plate

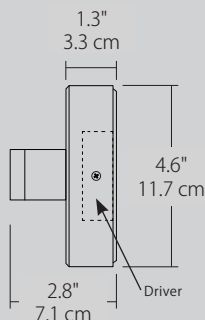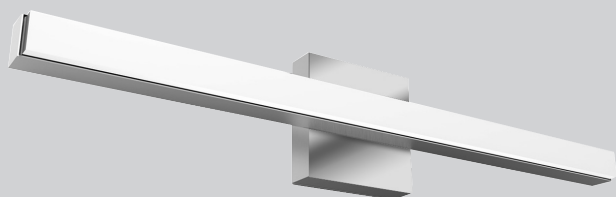



### DB - Deep Backplate (Standard)

4.6" H, 4.6" W, 1.3" D

Driver located inside Backplate

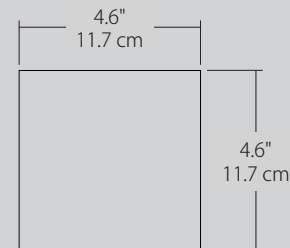

## Front Plate

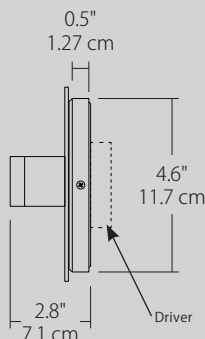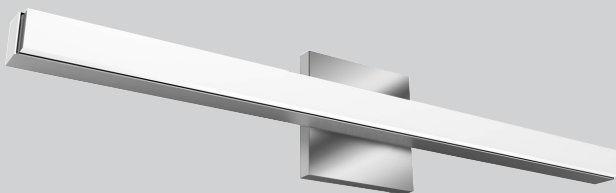

### S4 - Shallow Backplate (Optional)

4.6" H, 4.6" W, .5" D

Driver located inside J-Box

