

RUBIX - model: WS-W25

LED Wall Mount

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in reflector for superior optics; An appealing cylindrical profile with a powerful LED down light perfect for accent and wall wash lighting. PD-W2605 is supplied with 3 x 12" and 1 x 6" stems and the canopy has a hang straight swivel mount for sloped ceilings.

FEATURES

- Mounts up or down
- IP65 Rated, ETL & cETL Wet Location Listed
- Die-Cast Aluminum Construction
- Universal Voltage Input (120V - 277V)
- Dimming: ELV (120V) or 0-10V

SPECIFICATIONS

Construction: Aluminum with etched glass.

Power: Integral driver in luminaire. 120V - 277V input.

Light Source: High output LED

Mounting: Mounts directly to junction box

Dimming: 0-10V Dimming: 100%-10%

ELV Dimming: 100%-15% (120V only)











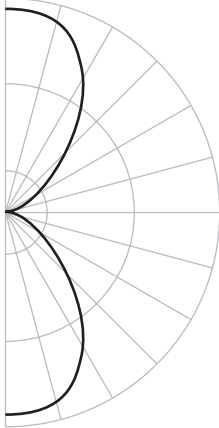
Finish: Brushed Aluminum (AL), Black (BK), Bronze (BZ), Graphite (GH), White (WT)

Color Temp: 3000K

CRI: 90

Rated Life: 70,000 hours

Standards: IP65 Rated, ETL & cETL Wet Location Listed, Dark Sky Friendly.

	Beam	Photometry	Voltage	Watt	Lumens	Finish
 <p>Single Light</p>  <p>WS-W2504 Dark Sky Friendly 86°</p>			120V - 277V	16W	750	AL Brushed Aluminum  BK Black  BZ Bronze  GH Graphite  WT White 
 <p>Double Light</p>  <p>WS-W2505 86°</p>			120V - 277V	30W	1400	

-

Example: **WS-W2504-GH**

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585