

Place Wall Mount (7A) onto wall and insert Mounting Screws (7B) through Wall Mount Holes (7C) and tighten until Wall Mount (7A) is flush with the wall. Do Not Over Tighten!

8A


8D

8B

8C

Insert Front Cover (7D) into Wall Mount (7A).


1/4-3/8

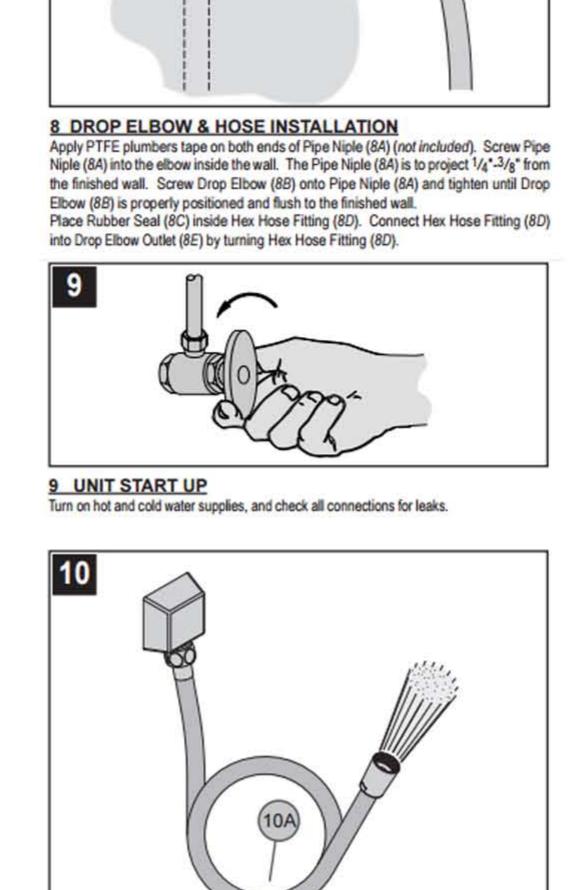

For final flushing, turn valve on and allow water to run through the Hose (10A) for several minutes. Allow water to run for several minutes untill all foreign matter clears the line.

11B

10 FINAL FLUSHING

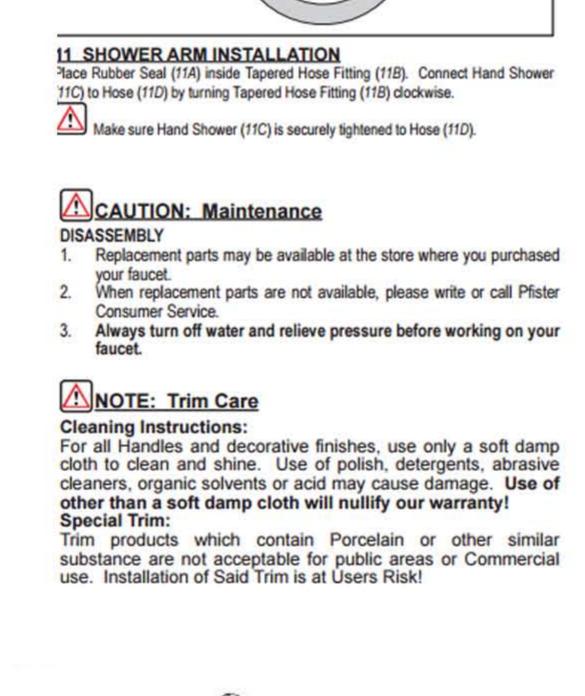

29)

(30)

6 5

(31)

39)

(24)

(22)



model, but is presented as a general guideline for Installations!

8

5