

## One-Light Pendant

 Ceiling cord mounted • Dry location listed **PROGRESS LED**


### Description:

One-light LED industrial style warehouse cord-hung pendant with spun metal shade. Gloss white inside shade for reflectivity. 3000K, 90CRI, 1,211 lumens 71.2 lumens/watt per module (source).

### Specifications:

- Venetian Bronze (-74) (plated)
- Steel Construction
- Spun metal shade, White acrylic diffuser
- LED Module is replaceable (part # 93053641)
- One-light LED industrial style warehouse cord-hung pendant.
- Spun metal shade.
- Gloss white inside shade for reflectivity.
- 3000K, 90CRI, 1,211 lumens.
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 10 feet of wire supplied
- ENERGY STAR® qualified

### Performance:

|                        |                                                      |
|------------------------|------------------------------------------------------|
| Number of Modules      | 1                                                    |
| Input Power            | 17w                                                  |
| Input Voltage          | 120 V                                                |
| Input Frequency        | 60 Hz                                                |
| Lumens/LPW (Source)    | 1211/71.2 (LM-82)                                    |
| Lumens/LPW (Delivered) | 788/50.5 (LM-79)                                     |
| CCT                    | 3000 K                                               |
| CRI                    | 90 CRI                                               |
| Life (hours)           | 60,000 (L70/TM-21)                                   |
| FCC                    | Meets FCC Title 47, Part 15 Class B                  |
| Min. Start Temp        | -30 °C                                               |
| Max. Operating Temp    | 30 °C                                                |
| Warranty               | 5 year warranty                                      |
| Labels                 | cCSAus Dry location listed<br>ENERGY STAR® qualified |

## P5094-7430K9

### Images:



### Dimensions:

Diameter: 16"  
Height: 8"  
Overall Ht. W/Cord: 129"

Glass 2  
Width: 5-13/16"  
Length: 5-13/16"  
Height: 0-1/2"

**Photometrics:**

**P5094-7430K9**

|                        |                                     |
|------------------------|-------------------------------------|
| <b>ELECTRICAL DATA</b> | <b>P5094-7430K9</b>                 |
| Input Voltage          | 120 V                               |
| Input Frequency        | 60 Hz                               |
| Input Current          | 0.142 A                             |
| Input Power            | 17                                  |
| Power Factor           | Greater than 0.90                   |
| THD                    | <20%                                |
| FCC                    | Meets FCC Title 47, Part 15 Class B |
| Operating Temperature  | -30 °C to 30 °C                     |
| Dimming                | Yes*                                |

\*See Dimming Notes for more information

**P5094-7430K9**


LED Light Engine: 3000 K 90 CRI  
 System Wattage: 17  
 Fixture delivered lumens: 788  
 Fixture Efficacy: 50.5  
 Spacing Criteria: 1.2

**CANDELA DISTRIBUTION**

| DEG | CANDELA | LUMENS |
|-----|---------|--------|
| 0   | 321     |        |
| 5   | 319     | 30     |
| 15  | 304     | 86     |
| 25  | 280     | 129    |
| 35  | 246     | 154    |
| 45  | 212     | 163    |
| 55  | 155     | 138    |
| 65  | 62      | 64     |
| 75  | 16      | 17     |
| 85  | 6       | 7      |
| 90  | 0       |        |

**ZONAL LUMEN SUMMARY**

| ZONE   | LUMENS | %FIXT |
|--------|--------|-------|
| 0-30   | 245    | 31.1  |
| 0-40   | 399    | 50.7  |
| 0-60   | 700    | 88.8  |
| 0-90   | 788    | 100.0 |
| 90-180 | 0      | 0.0   |
| 0-180  | 788    | 100.0 |

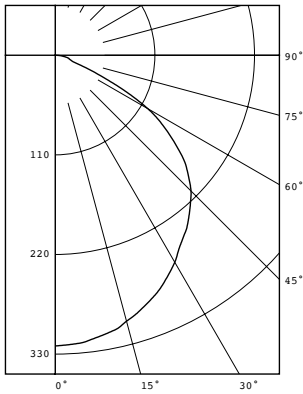

Test 9030 Test Date 05/12/14



## P5094-7430K9

### Dimming Notes:

---

P5094 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

### Dimming Controls

---

|         |               |            |
|---------|---------------|------------|
| Lutron  | Nova T        | NTELV-300  |
| Lutron  | Vierti        | VTELV-600  |
| Lutron  | Maestro       | MAELV-600  |
| Lutron  | spacer/system | SPSELV-600 |
| Leviton | Renoir II     | AWRMG-EAW  |

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.