



ITEM# RV-CC1185232

IMPORTANT SAFETY INSTRUCTIONS


- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box. Note: Some types of fuses must be unscrewed to shut the power off.

! For any replacement parts or installation issues, please email service@revel-home.com

*** Connect the ground wire (bare copper or green) from your fixture to the ground wire (copper or green) or ground screw in the electrical outlet box.**

*** We highly recommend that this chandelier is installed by two people.**



Unpack the Fixture: Check the contents of the box. Box should contain all items below.

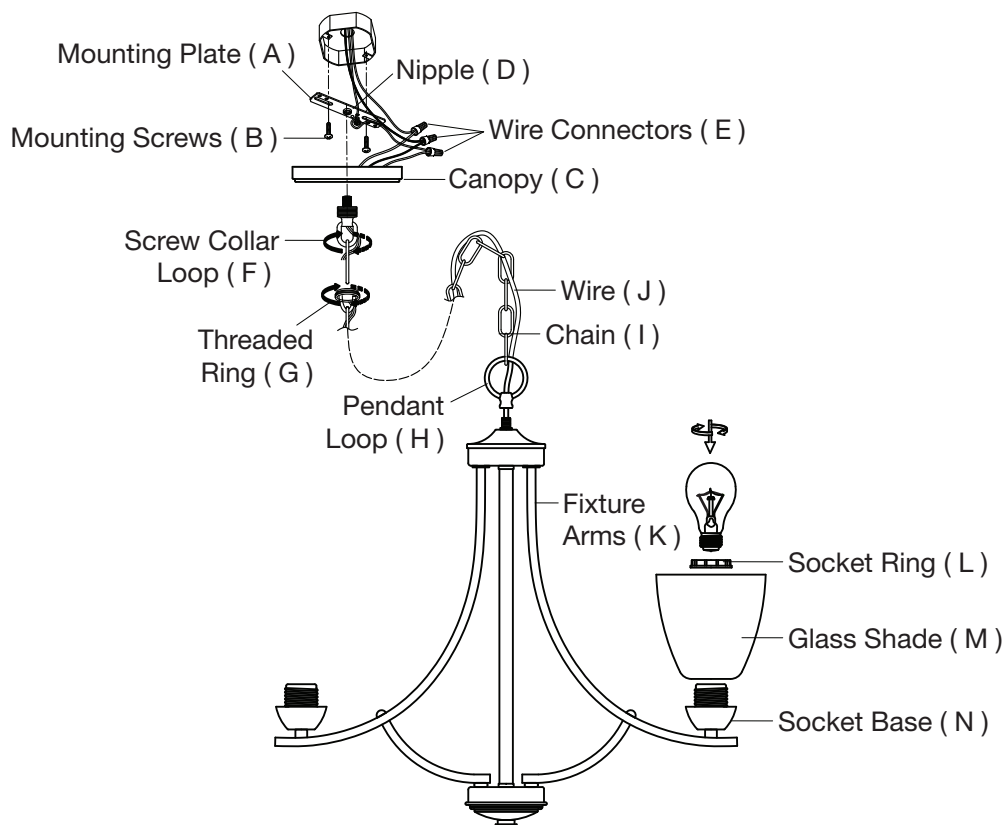

ASSEMBLY:

- 1** Fasten Mounting Plate (A) to the junction box using Mounting Screws (B) provided.
- 2** Remove Threaded Ring (G) from Screw Collar Loop (F).
- 3** Place Canopy (C) against the ceiling and adjust Screw Collar Loop (F) along with the hex nut above it, until 3/8" of the threaded portion is visible. Remove Canopy (C) after Screw Collar Loop (F) has been properly adjusted.

- 4 Spread out Fixture Arms (K) to create the chandelier design.
- 5 Secure Glass Shades (M) onto fixture.
 - a. **Socket rings should be on the sockets. Remove socket rings from the sockets.**
 - b. Place Glass Shade (M) on Socket Base (N).
 - c. Screw Socket Ring (L) onto Socket Base (N) to securely tighten Glass Shade (M) to the fixture.
 - d. Repeat for each of Fixture Arm (K).
- 6 Attach Pendant Loop (H) to the fixture.
- 7 Assemble one end of Chain (I) to Pendant Loop (H) by opening the chain link and closing it around Pendant Loop (H) with pliers.
- 8 Cut Chain (I) and Wire (J) to desired hanging length, leaving an additional 10" of Wire (J) beyond Chain (I).
- 9 Weave Wire (J) through every 5 links on Chain (I). Slide Threaded Ring (G) down Chain (I) making sure the flange (raised end) is facing up. Slide Canopy (C) down Chain (I).
- 10 Attach top end of Chain (I) to Screw Collar Loop (F) by lifting the fixture, opening the chain link, and closing it around Screw Collar Loop (H) with pliers.
- 11 Insert Wire (J) through the hole in Screw Collar Loop (H) and Nipple (D) into the junction box.
- 12 Using the wire graph below, connect the appropriate wires with Wire Connectors (E) provided, to the corresponding wires in the junction box. Place all wires and connectors back into the junction box.

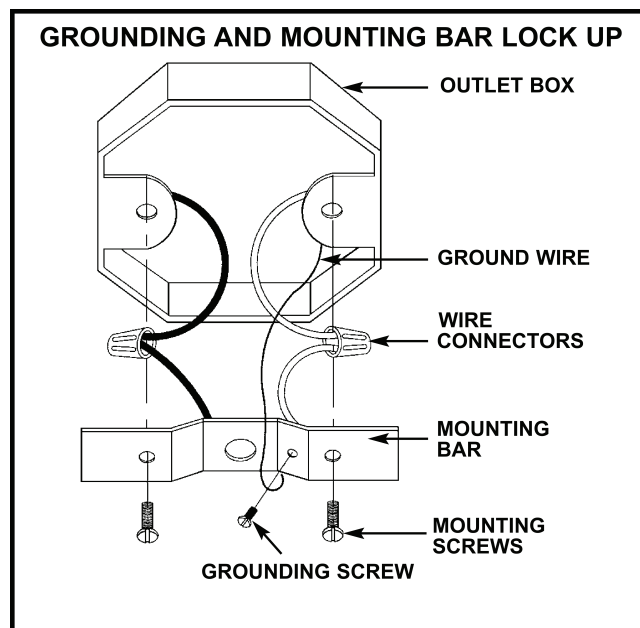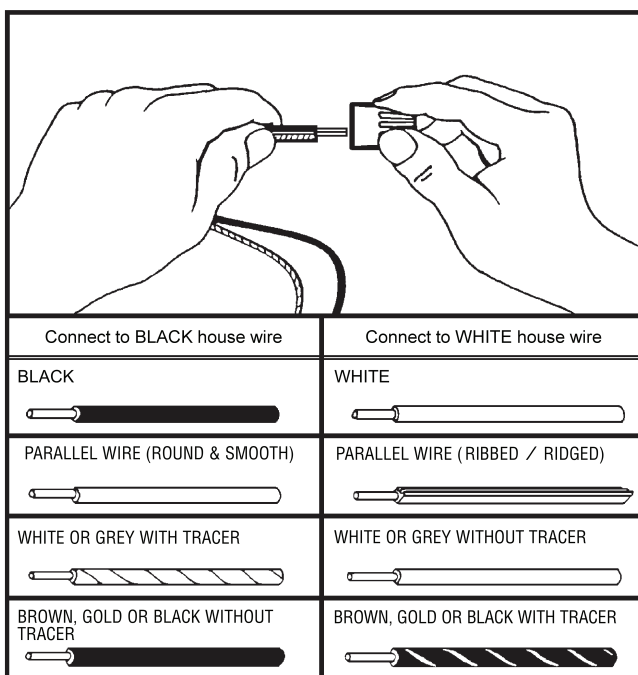

- 13 Slide Canopy (C) up Chain (I) and place it against the ceiling. Slide Threaded Ring (G) up Chain (I) and screw it onto Screw Collar Loop (F), holding Canopy (C) in place.

Enjoy your new fixture!