


Assembly Instruction Sheet #IS-9972 P47
For Style 9972P47


Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (20) E12 Candelabra Base Bulbs 60W (Manufacturer Include).
Estimated Assembly Time: 20-30 minutes
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions
Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.
These instructions are provided for your safety. It is very important you read them completely before installing the fixture.
We strongly recommend that a licensed, professional electrician perform the installation.
Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.


Package Contents




A Fixture Body x1




E Ceiling Canopy x1




E Chain x2




D Ceiling Canopy x1




E Side Arm x2




E Side Arm x4




G Connecting pipe x3




H Connecting pipe x3




I Socket sleeve x12




J Drycell Ball x3



K Lamp holder x1




L Lamp holder x3




M Pin x3

Hardware Contents

PART	DESCRIPTION	QUANTITY
BB	Wire nut	2pcs
CC	Screw	2pcs



BB



CC

STEP 1- Install (F) Connecting pipe to (I) lamp holder.

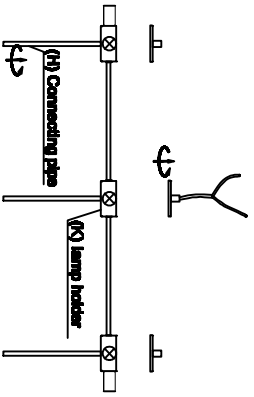


Figure 1

STEP 2- Install (L) lamp holder to Connecting pipe.


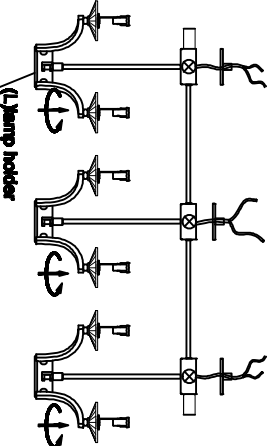


Figure 2

STEP 3- Wire Connections .

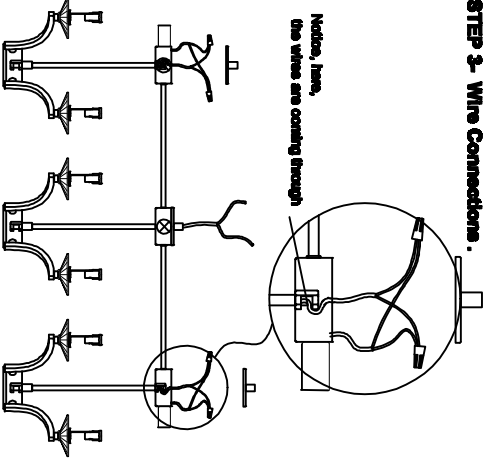

Notice, lamp, the wires are coming through

Figure 3

STEP 4- Install (G) Connecting pipe to (I) lamp holder .


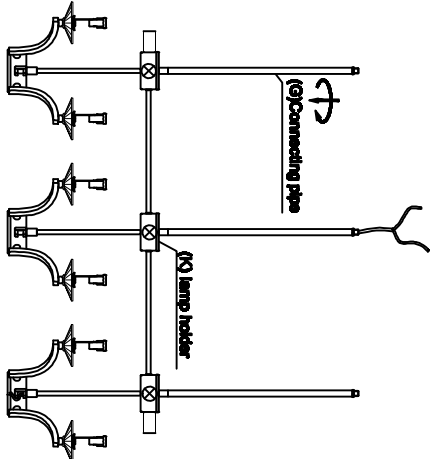


Figure 4

STEP 5- Install (D) Ceiling Canopy to (G) Connecting pipe.

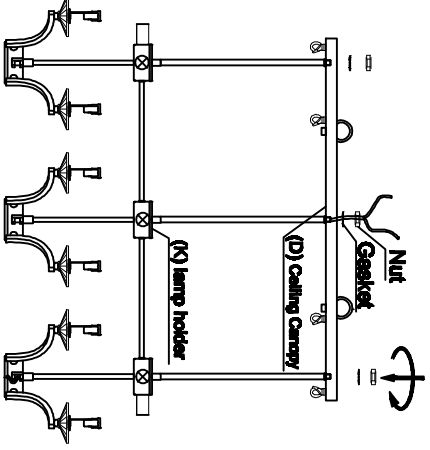

Nut
Washer
(D) Ceiling Canopy
(I) lamp holder

Figure 5

STEP 6 - Install Side Arm .

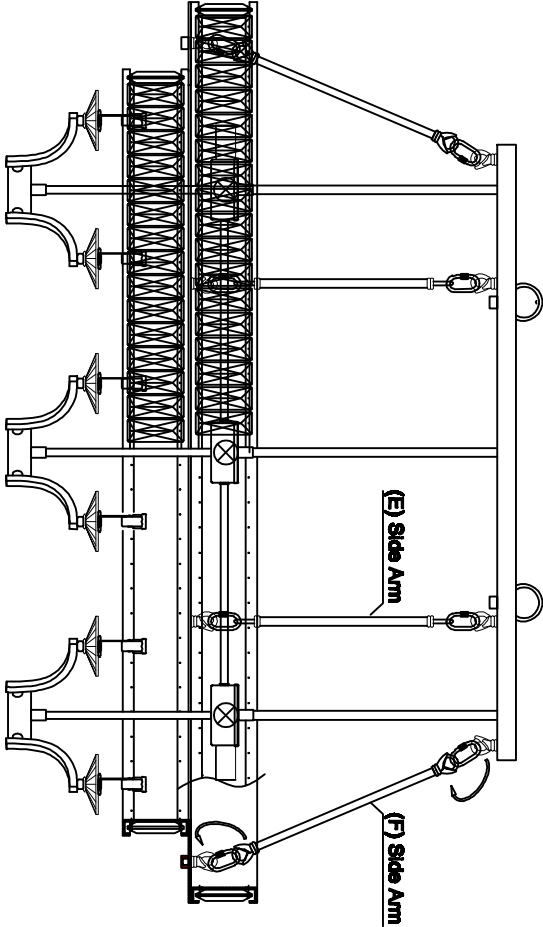


Figure 6

STEP 7 - Release Mounting bracket from Ceiling Canopy .




Figure 7

STEP 9 - Attach Mounting bracket to Outlet Box

A. Pass the supply wires through the Mounting bracket(EE), Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (CC). Tighten until snug.

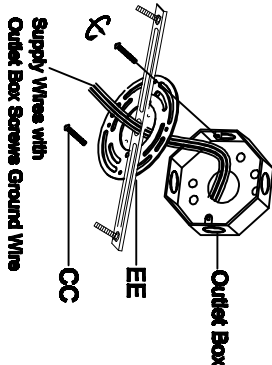


Figure 9

STEP 8- Install Ceiling Canopy and Chain.

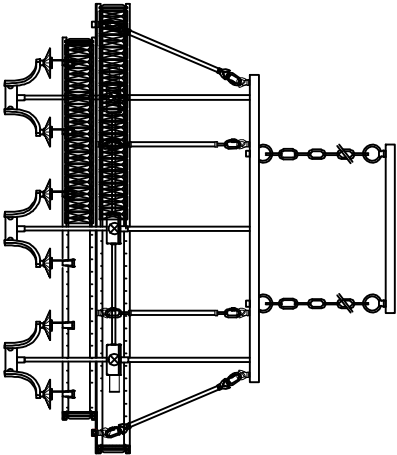


Figure 8

STEP 10 - Install Ceiling Canopy to Ceiling

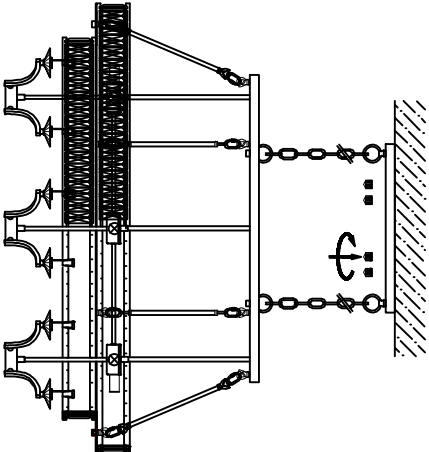


Figure 10

STEP 11 - Install Crystal Ball,Socket sleeve and Bulbs.

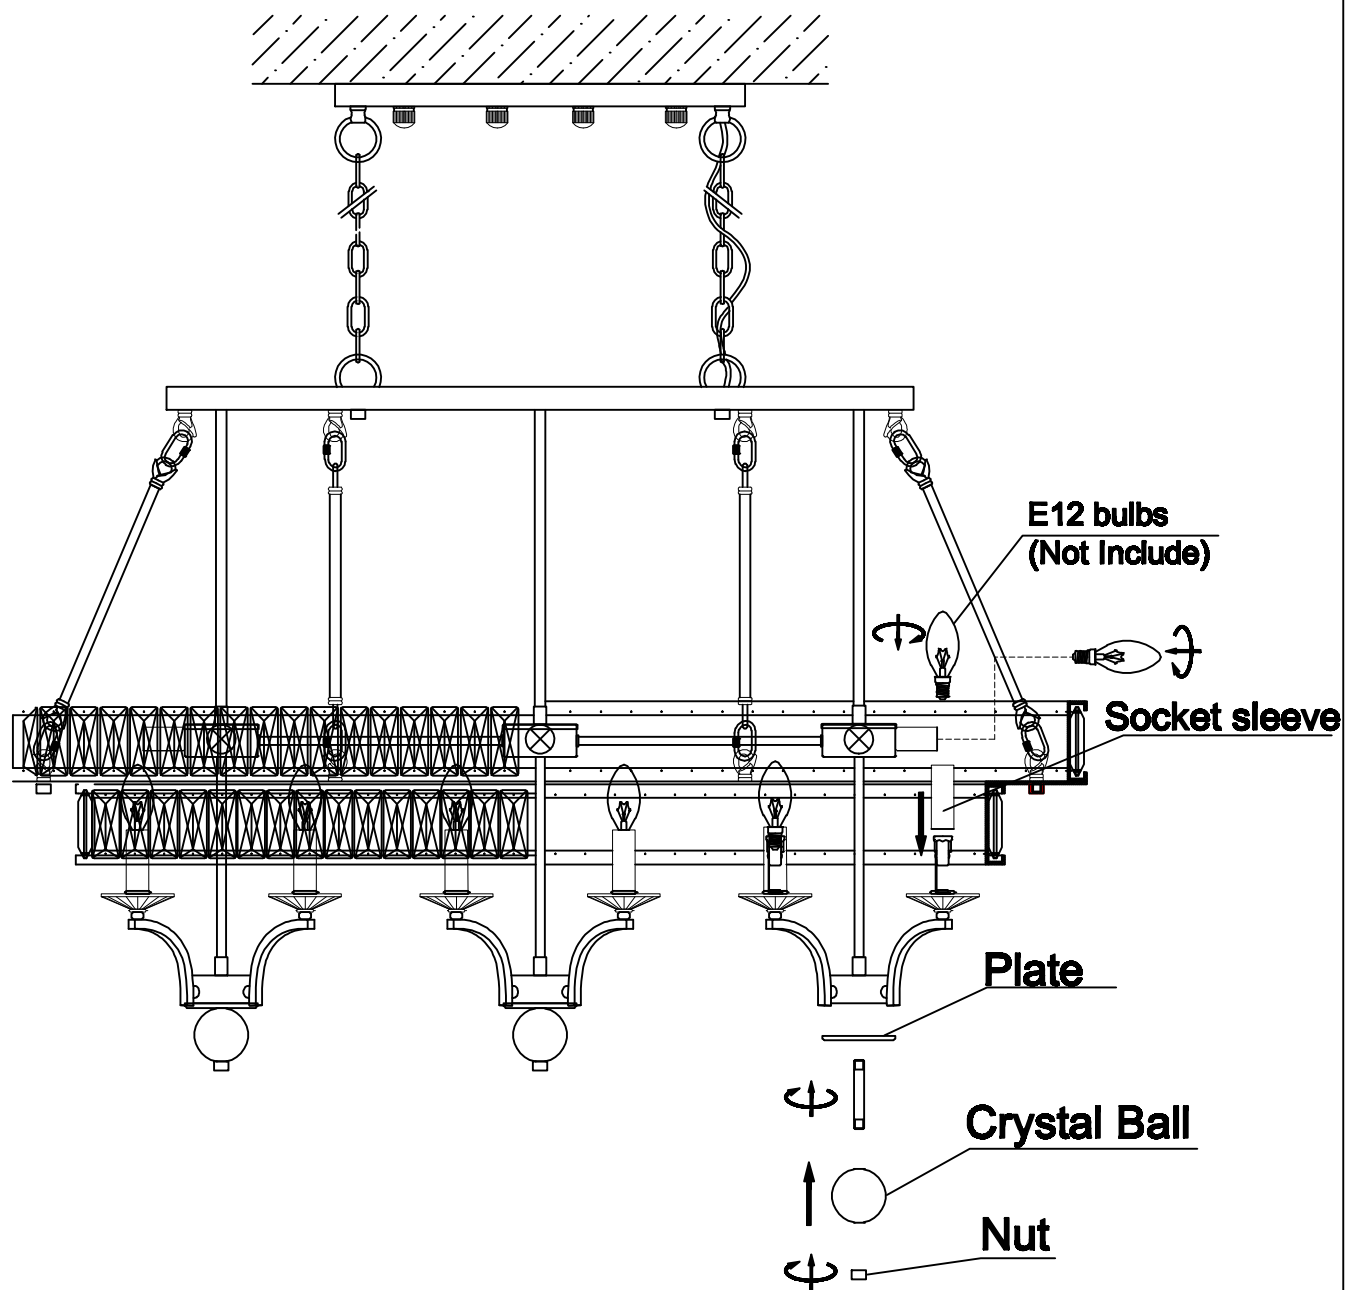


Figure 11