


### STANDARD SPECIFICATIONS:

- Two lever handles precisely adjust flow and temperature.
- Maximum handle rotation angle is 90° for full-on water flow.
- The ceramic disc cartridge has been tested to withstand 500,000+ cycles and effectively resists leaks.
- Includes two flexible 23-5/8" PEX hoses for hot and cold water supply.
- 1.2 GPM (gallons per minute) maximum flow rate at 60 PSI.
- Durable stainless steel 360° swivel spout.
- Corrosion-resistant zinc alloy handles.
- The removable aerator provides a soft and splash-free water stream.
- Please note that the pop-up drain assembly is not included.

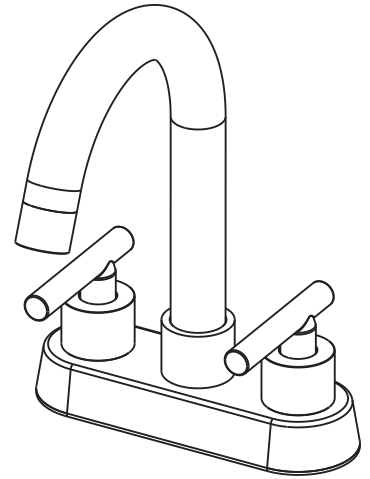

### COLORS/FINISHES:

Color tiles intended for reference only.

Color	Code	Description
	BK	Matte Black
	CH	Polished Chrome
	GD	Brushed Gold
	NK	Brushed Nickel

### INSTALLATION:

- Two-hole or three-hole mount.
- For 4" centerset deck mounting.

### MAINTENANCE AND CARE:

Use a soft cloth and a mild detergent to wipe the surface. Avoid abrasive tools or scrubbing to prevent scratches.

### WARRANTY:

EVERSTEIN offers a limited lifetime warranty that covers defects in materials and workmanship under normal residential use. This warranty excludes coverage for damages resulting from misuse, improper installation, or accidents. A valid proof of purchase is required to process any warranty claims.

