

# ASSEMBLY INSTRUCTION

Item#: 5107-75001 BASE (C)  
5107-75002 TOP (C)

**\*\* Please make sure you have all parts indicated below prior to assembly.  
This unit is heavy and can best be assembled with the help of two or more persons.**

NO.	HARDWARE LIST		Q'TY
A		FLAT WASHER	4
B		LOCK WASHER	4
C		BOLT	4
D		ALLEN WRENCH	1
E		DOWEL	2

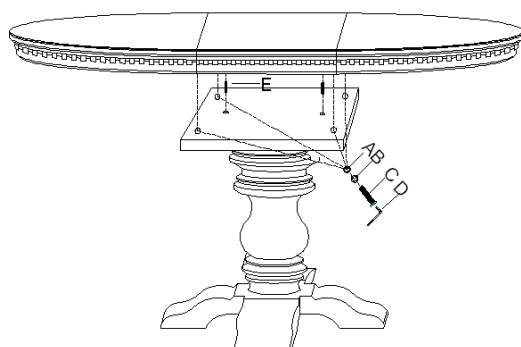
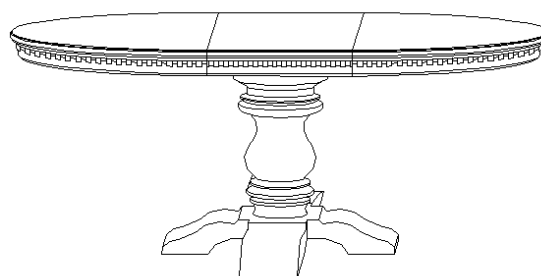


Diagram 1

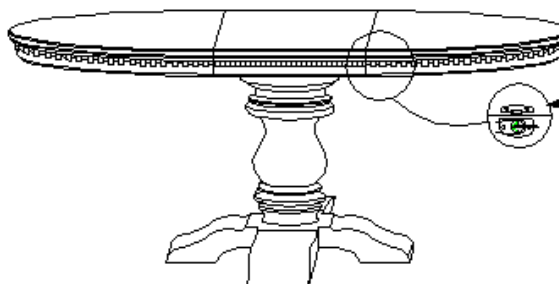


Diagram 2

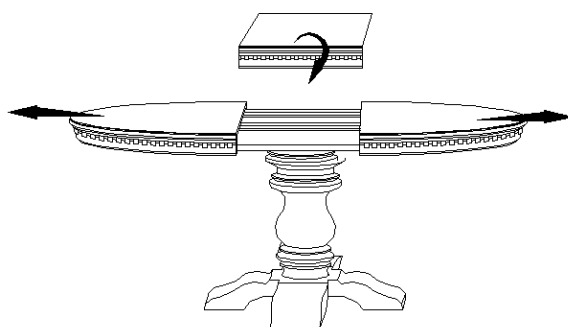



Diagram 3

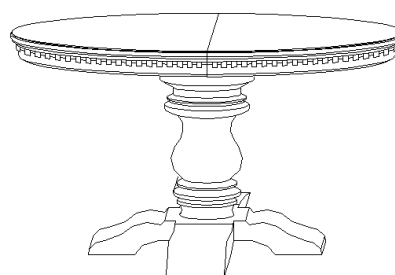


Diagram 4

## Assembly Steps:

1. Insert dowels (E) to the holes of bridge, align dowels on bridge to the holes on top panel, attach top panel to base using bolts (C), lock washers (B), flat washers (A), secure all with allen wrench (D) in a clockwise direction (See Diagram 1).
2. If you want to remove leaf from the top, please turn the switch to “off” position underneath the top panel(See Diagram 2).
3. Pull out two ends of top panel and remove it away, then push top panel together and turn the switch to “on” position. (See Diagram 3& Diagram 4).

***Cleaning Instruction: Clean finished parts with a damp cloth using a mild dishwashing liquid and water solution. Polish the finish with soft cloth and an industry recognized furniture polish.***