

Lights | Remote Heads | Exit Signs | EM-Drivers | Outdoor
LED Emergency Series



More Choices for **More Applications**

EOF LED Emergency Outdoor Full Cutoff

The LED Emergency Outdoor Full Cutoff combines 90-minute emergency lighting with a low-profile, architectural design. The EOF is designed for outdoor use, with an optional cold-weather kit for added reliability in northern climates. The EOF comes standard with a photocell, with an optional motion sensor adding even more energy efficiency. An internal selector switch allows bypassing the photocell to control the unit from a wall switch. A nonemergency unit is available for locations not requiring battery-backup, providing a uniform look for all fixtures.

Construction

IP65 Rated enclosure
Durable die-cast Aluminum body
Separable backplate for easy installation and maintenance

Optical System

Polycarbonate lens
Utilizes advanced LED technology with CCT of 3000K and 5000K
CRI 70+

Electrical

Input voltage of 120/277
Maintenance-free NiCad battery provides 90-minute emergency operation
LED indicator light & test button with self-testing, self-diagnostic option
Photocell standard with selectable wall switch control
Motion sensor option for additional energy saving
Operating Temperature:
EM: 32°F to 122°F (0°C to +50°C)
Non-EM and EM Cold Weather: -13°F to +122°F (-25°C to +50°C)

Mounting and Installation

Fixture mounts directly to J-Boxes and walls with screws
Wiring possible through backplate or 1/2" conduit knockout
For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Finish


Fine-textured, UV-stabilized powder coat
bronze, white, black, or silver finish

Listings

LM-79, LM-80 testing performed in accordance with IESNA standards.
UL & cUL 924 Listed
Meets or exceeds requirements of NFPA 70 & NFPA 101
Meets FCC Part 15, Subpart B, Class B standards for conducted and radiated emissions
TM-21 Projected L70(9k) life >72,000 hours

Warranty

2-year limited system warranty standard
Warranty does not cover product failure due to an overvoltage event (power surge)

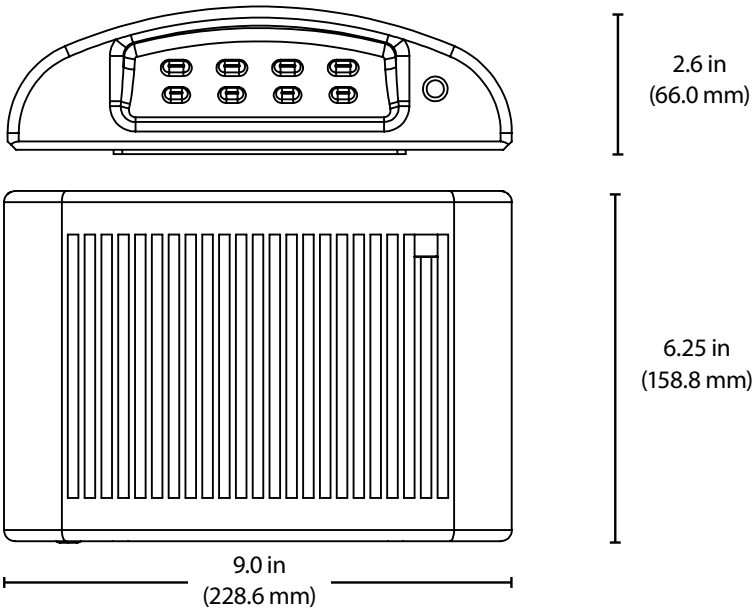

Product Information	
Input Voltage (VAC)	120/277
Power Draw (W)	17
Delivered Lumens - Standard Operation (Lm)	1555
System Efficacy (Lm/W)	92
Correlated Color Temp (K)	3000K or 5000K
Color Rendering Index (CRI)	72
Delivered Lumens - Emergency Operation (Lm)	560
Emergency Operation	Minimum 90 minutes



Applications



The EOF series can be installed in many outdoor applications such as warehouses, parking structures, apartments, multi-family, etc.

Installation



Fixture mounts directly to wall or J-boxes via screws. The backplate makes wiring possible with conduit and wiring knockouts.

The EOF is equipped with a photocell standard with selectable wall switch control.



EOF Ordering Information									
Series	Version	Voltage	CCT	Housing Color	Photocell	Motion Sensor	Testing	Cold Weather	Emergency
EOF	1	MV (120/277VAC)	3K (3000K)	BZ (Bronze)	P (Photocell)	_(No Sensor)	_(Manual)	_(Standard)	_(Emergency)
			5K (5000K)	WH (White)*		M (Motion Sensor)	S (Self-Diagnostic)	C (Cold Weather)	AC (Non-EM)
				BK (Black)*					
				SV (Silver)*					

*Consult manufacture for availability

Warehouse Locations

Albuquerque, NM
Atlanta, GA
Detroit, MI
Houston, TX
Indianapolis, IN

Lombard, IL
Miami, FL
Syracuse, NY
Van Nuys, CA

T 800.821.6283

F 800.892.8393

www.nicorlighting.com

2200 Midtown Pl. NE

Albuquerque, NM 87107 USA



LIT-EMFB-10PK

©2019 NICOR® • ALL RIGHTS RESERVED



NICOR®  **LED**