



## Novara LED NVS/NVV Series

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

### Features

Stylish, geometric design can be mounted vertically or horizontally. Shallow width is ideal for mounting in areas where space is limited. Use in hallways, corridors, bath or restrooms. Mounts to standard junction box (not included).

### Construction

Back pan and mounting plate are die-formed steel. Standard mounting holes and hardware included, power supply connection must be made inside junction box (not included).

### Finish

Plated satin nickel finish with clear top coat.

### Diffuser

White acrylic.

### Electrical

Direct wired with a constant current low voltage electronic LED driver rated at 120 VAC. The driver is dimmable down to 10% of full scale with a 2-wire (Triac) or electronic low voltage (ELV) dimmer switch.

### Lamping

Fixture includes a LED modules capable of producing:  
 13" - 15.5W, 1200 source lumens  
 25" - 31W, 2400 source lumens  
 37" - 46.5W, 3600 source lumens  
 49" - 62W, 4800 source lumens  
 3000K (CCT). Rated for 50,000 Hrs. 90 CRI.



### Certification

ADA  
 cETLus listed for damp locations.

### Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

**Specifications and dimensions  
 subject to change without notice.**

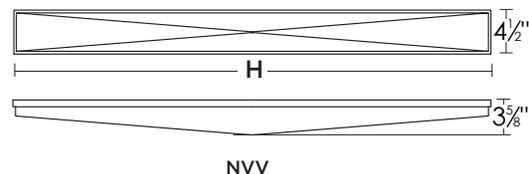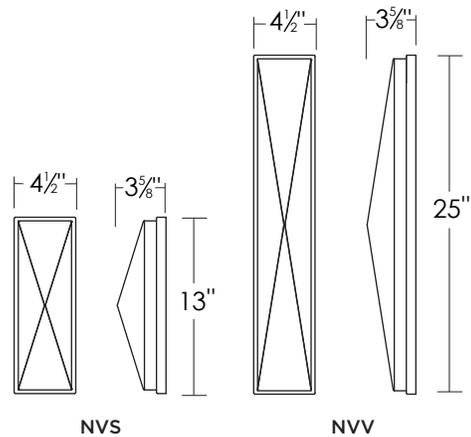

### Ordering Information:

Satin Nickel	Source			H	W	D
	LED	Lumens	CCT			
NVS5131200L30D1SN	15.5W	1200	3000K	13"	4-1/2"	3-5/8"
NVV5252400L30D1SN	31W	2400	3000K	25"	4-1/2"	3-5/8"
NVV5373600L30D1SN	46.5W	3600	3000K	37"	4-1/2"	3-5/8"
NVV5494800L30D1SN	62W	4800	3000K	49"	4-1/2"	3-5/8"