

### Features

- Molded lumbar support offers extra comfort while bathing.
- Slotted overflow allows for deep soaking.

### Material

- Acrylic.

### Installation

- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately).
- Drop-in or undermount.

### Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

### Recommended Products/Accessories

K-550 Under-Mount Installation Kit  
K-1491 Bath/Whirlpool Pillow  
K-1601 Bath/Whirlpool Footstop  
K-24916 Wireless Music Kit  
K-1177 Vinyl Tiling-in Bead  
K-23726 Drain treatment  
K-23732 Tub & shower cleaner



### Codes/Standards

CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2


### KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.




### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color  | Code | Description   |
|--|------|---------------|
|  | 0    | White         |
|  | 96   | Biscuit       |
|  | 47   | Almond        |
|  | NY   | Dune          |
|  | 95   | Ice™ Grey     |
|  | G9   | Sandbar       |
|  | K4   | Cashmere      |
|  | 58   | Thunder™ Grey |
|  | 7    | Black Black™  |

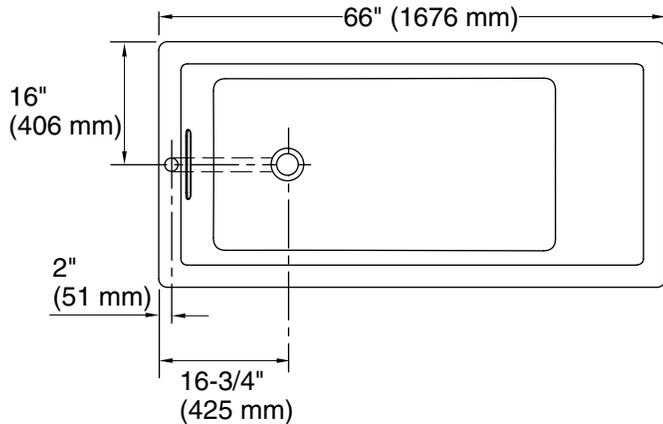

No change in measurement if connected with drain illustrated. (K-7272)

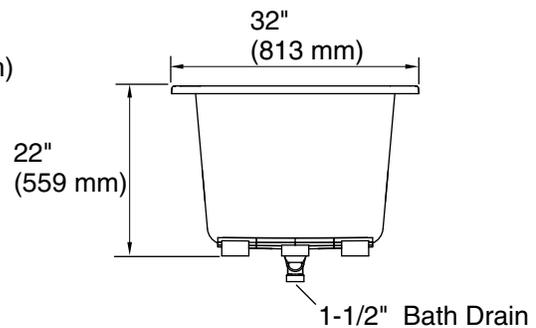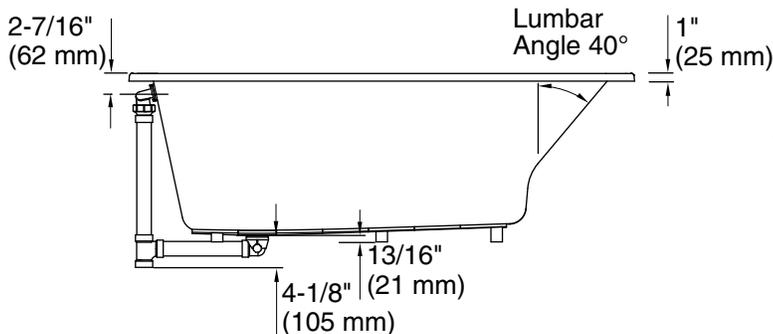

### Technical Information

All product dimensions are nominal.

|                        |   |
|------------------------|---|
| Installation:          | Drop-in, Under-mount                              |
| Drain location:        | End   |
| Basin area, bottom:    | 44-1/2" x 22-5/16" (1130 mm x 567 mm)             |
| Basin area, top:       | 59-5/8" x 25-1/2" (1514 mm x 648 mm)              |
| Weight:                | 86 lbs (39 kg)                                    |
| Minimum floor load:    | 50 lbs/ft <sup>2</sup> (244.1 kg/m <sup>2</sup> ) |
| Water depth:           | 18" (457 mm)                                      |
| Water capacity:        | 85.8 gal (324.8 L)                                |
| Cutout:                | Drop-in, 64-1/2" x 30-1/2" (1638 mm x 775 mm)     |
| Minimum flat for door: | 2-1/2" (64 mm)                                    |

### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).