


ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0112 / C0258

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.


Hardware Package (included):

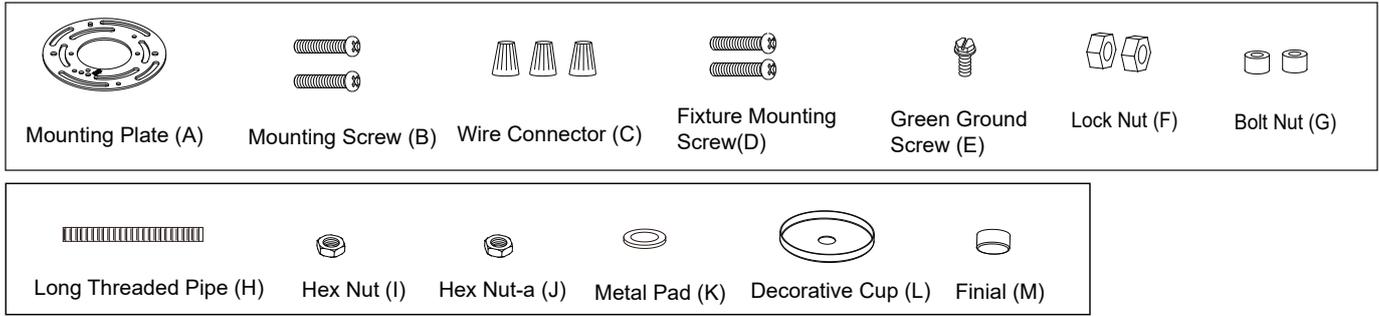

Installation Steps

Turn off the power at fuse or circuit box

1. Thread the fixture mounting screws (D) through mounting plate (A), and then secure them with two lock nuts (F). Adjust the length of fixture mounting screws (D) if necessary.
2. Attach mounting plate (A) to the outlet box using two mounting screws (B).
3. Thread the fixture wire through the tube and the canopy.
4. Attach one end of the tube to the canopy, and the other end to the threaded pipe of the fixture.
5. Attach the long threaded pipe (H) to coupling, and then secure the preinstalled hex nut (I).
6. Attach the hex nut-a (J) and the metal pad (K) to the long threaded pipe (H), slip the plastic plate and decorative cup (L) up through the long threaded pipe (H), and then secure them with the finial (M).
NOTE: The depth of the lower hex nut-a (J) and the metal pad in long threaded pipe may need to be adjusted to properly fit the plastic plate. The plastic plate should be flatly laid on three brackets, and the frosted side of the plastic plate should be faced down.
7. Install bulbs (not included). Check relamping label at socket area or packaging for maximum wattage allowed.

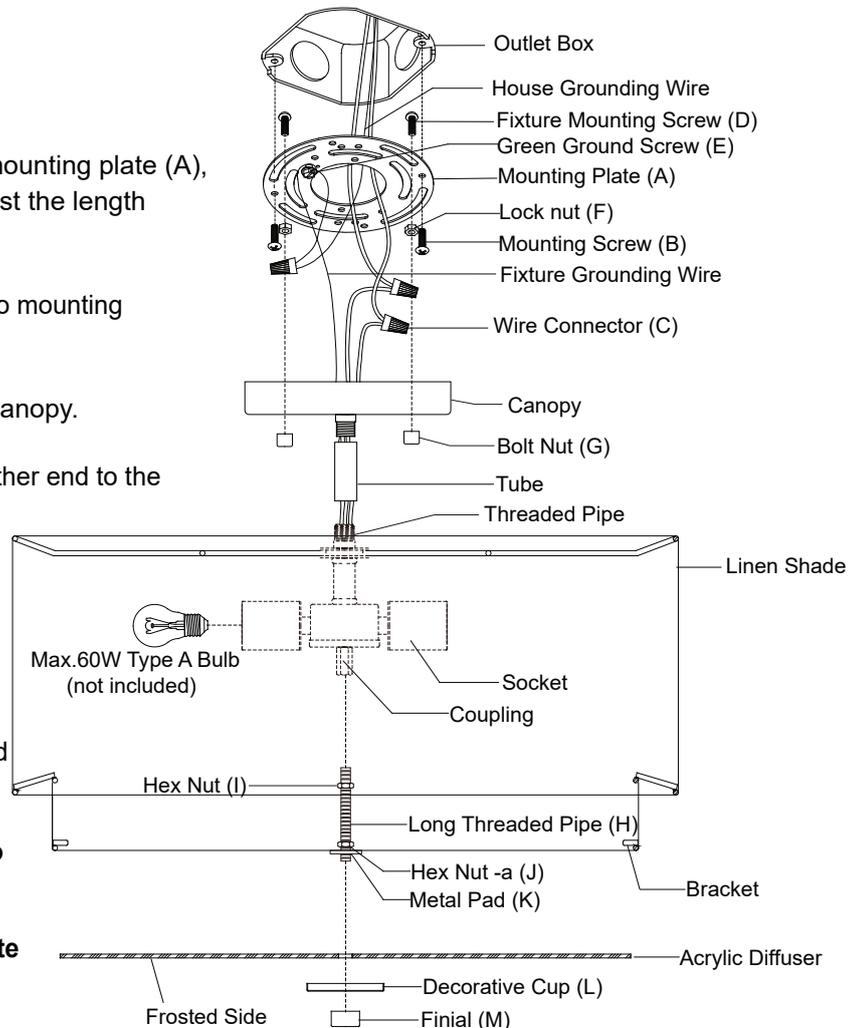

8. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire (green insulation or bare wire) to the mounting plate (A) with the green ground screw (E), and then connect it to the house ground wire with the wire connector (C).
 Carefully put all of the wires back into the outlet box.
9. Attach the canopy to the mounting plate (A) by inserting the fixture mounting screws (D), and then secure it with two bolt nuts (G).


Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

The Spare Parts List is organized into three main sections:

- Mounting Hardware:** This section includes a Mounting Plate (A), Mounting Screws (B), Wire Connectors (C), and Fixture Mounting Screws (D). It also includes a Green Ground Screw (E), Lock Nuts (F), and Bolt Nuts (G). Arrows point from this section to the following part numbers:
 - 5454MM (1 SET) for C0112
 - 6443MM (1 SET) for C0258
- Assembly Kit:** This section includes a Long Threaded Pipe (H), Hex Nut (I), Hex Nut-a (J), Metal Pad (K), Decorative Cup (L), and Finial (M). An arrow points from this section to the following part numbers:
 - 5455AA (1 SET) for C0112
 - 6444AA (1 SET) for C0258
- Other Components:** This section includes a Linen Shade (1107S) and a Plastic Plate (7195PP).

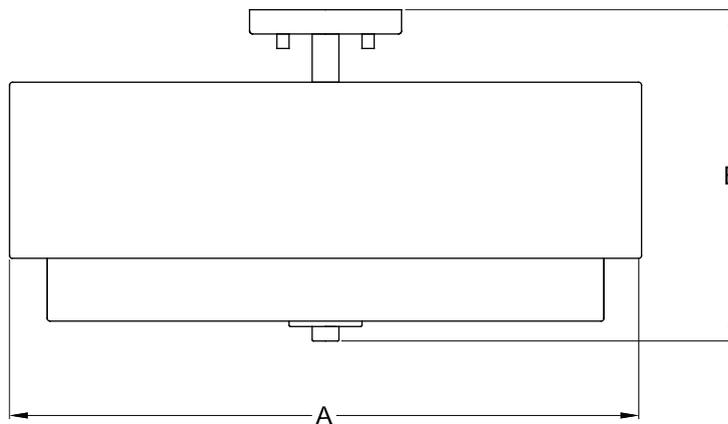

A: 20-1/2"

B: 10-3/4"