


ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0129

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

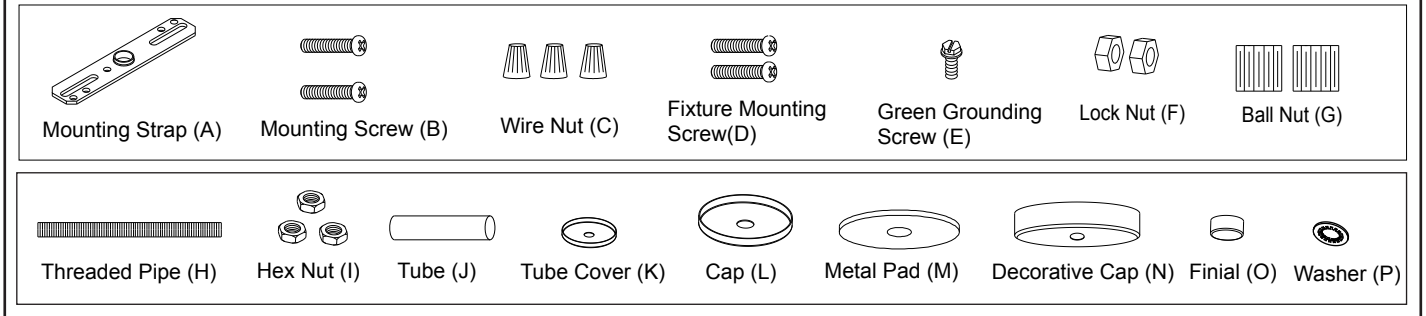

Installation Steps

Turn off the power at fuse or circuit box

1. Attach two fixture mounting screws to the mounting strap, and then secure it with two lock nuts. Adjust the length of the fixture mounting screws if necessary.
2. Attach the mounting strap to the outlet box using two mounting screws.
3. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
 - Connect the black wire from the fixture to the black wire from the power source.
 - Connect the white wire from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with a wire nut.
- Carefully put the wires back into the outlet box.
4. Attach the canopy to the mounting strap by inserting the fixture mounting screws, and then secure it with two ball nuts.
5. Install the bulbs (not included). Check relamping label at socket area or packaging for maximum allowed wattage.
6. Attach the threaded pipe into the coupling of fixture, and secure it with the washer and hex nut.


Note: Depth of the threaded pipe may need to be adjusted to properly fit glass shade, decorative cap and finial.

7. Attach the tube onto the tube cover above the coupling and another tube cover and cap onto the bottom of the tube. Then tighten them with the hex nut.
- Make sure the opening side of cap facing down.**
8. Slip the glass shade and metal pad through the threaded pipe and upward the socket base. Then tighten them with the hex nut.

Caution: Do not over tighten, breakage of glass shade could be occurred.

9. Slip the the decorative cap up through the threaded pipe, secure it with a finial.

Turn on the power at fuse or circuit box

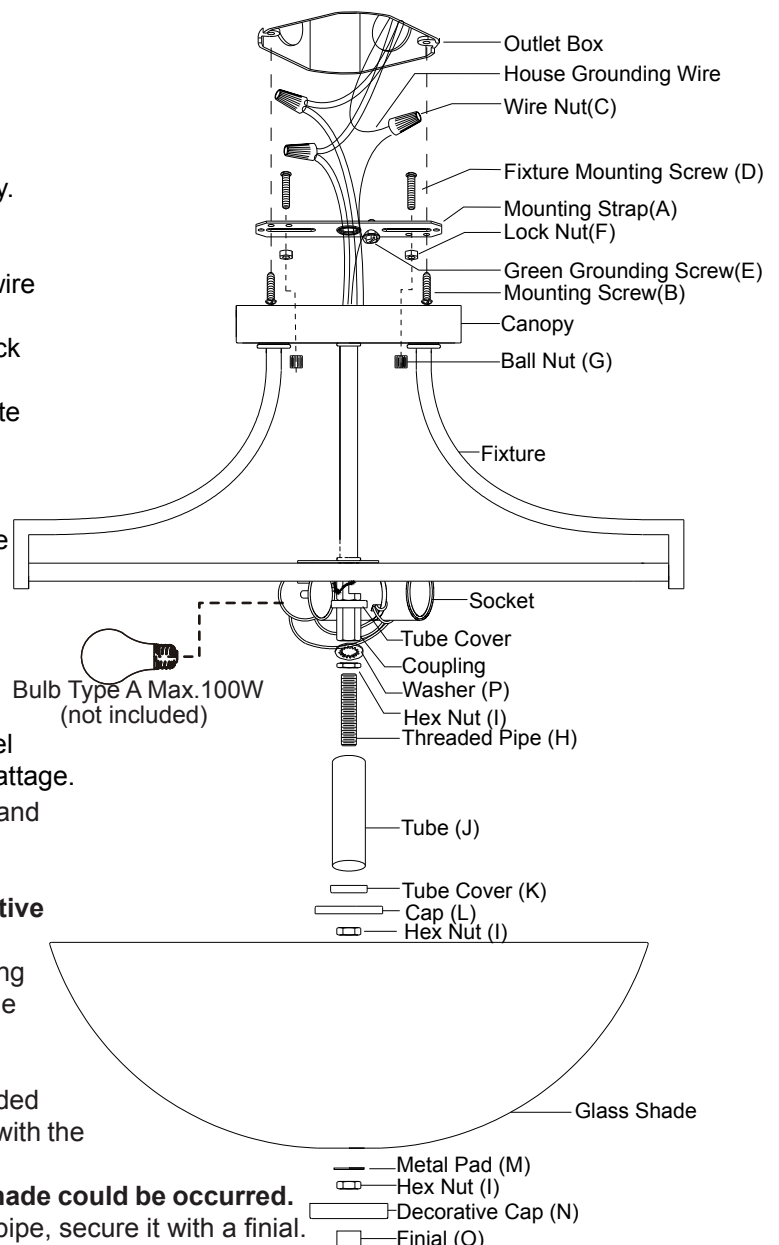


VAXCEL


161013

The following parts are available for re-order if damaged or missing.


Spare Parts List:




Mounting Strap (A)




Mounting Screw (B)




Wire Nut (C)




Fixture Mounting Screw (D)



Green Grounding Screw (E)




Lock Nut (F)




Ball Nut (G)


← Mounting Hardware 5616MM (1 SET)




Threaded Pipe (H)




Hex Nut (I)




Tube (J)




Tube Cover (K)




Cap (L)




Metal Pad (M)



Decorative Cap (N)




Finial (O)



Washer (P)


← Mounting Accessory 5617AA (1 SET)

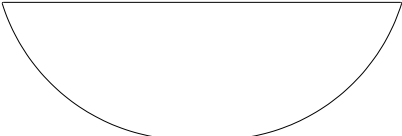

Glass Shade 9843EW

The diagram shows a side view of a pendant light fixture. It consists of a mounting bracket at the top with three vertical support tubes. Two curved arm tubes extend from the bracket to a horizontal metal pad. A glass shade is mounted below the pad. Dimension 'A' is the width of the fixture at the base of the glass shade. Dimension 'B' is the height from the base of the glass shade to the top of the mounting bracket.

A: 17-1/4"
B: 12-1/2"

VAXCEL

161013