

### Important safety instructions:

- Please read carefully all instructions before assembly.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

### Pre-assembly:


- Do not discard any content until assembly is complete to avoid accidentally discarding small parts or hardware.
- Take out all parts and hardware from box.

### Parts List

Item	Description	QTY
P1	Chair Back	1
P2	Seat Cushion	1
P3	Front Legs	2

### Hardware List

Item	Description	QTY
H1	Long Bolts $\phi 5/16"$ *3-1/4"L	4
H2	Medium Bolts $\phi 5/16"$ *2"L	4
H3	Short Bolts $\phi 5/16"$ *1-3/4"	1
H4	Lock Washers 5/16"	9
H5	Flat washers 5/16"	9
H6	Allen Wrench 5/16"	1

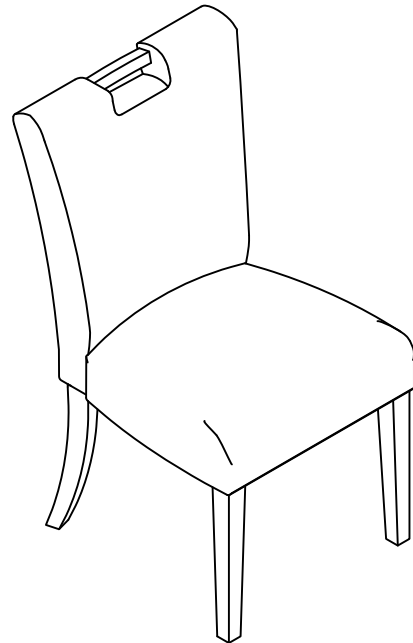


### DISCLAIMER:

**WHEN PROPERLY ASSEMBLED, THIS ITEM IS SAFE FOR INTENDED USE. SELLER IS NOT LIABLE FOR ANY DAMAGES RESULTING FROM ITEM BEING IMPROPERLY ASSEMBLED AFTER PURCHASE.**





### Assembly Procedures:

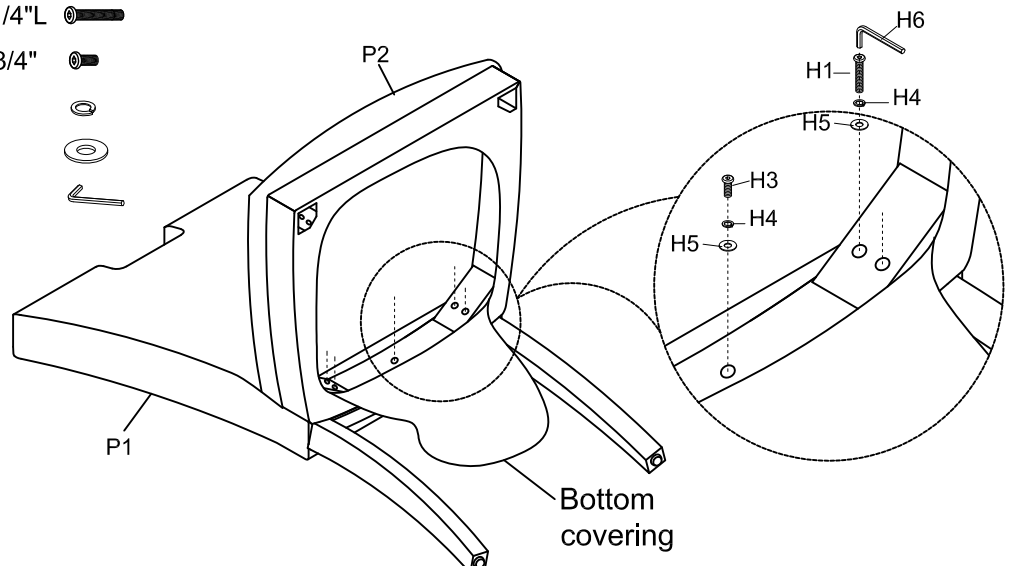
Step 1. Assembly the chair on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Open the bottom covering, then loosely attach seat cushion (P2) to a chair back (P1) using long / short bolts (H1, H3), lock washers (H4) and flat washers (H5) as shown below.

- (H1)x4 Long Bolts  $\phi 5/16"$ \*3-1/4"L
- (H3)x1 Short Bolts  $\phi 5/16"$ \*1-3/4"
- (H4)x5 Lock Washers 5/16"
- (H5)x5 Flat washers 5/16"
- (H6)x1 Allen Wrench 5/16"




**Step 2.** Attach each front leg (P3) to seat cushion (P2) using medium bolts (H2), lock washers (H4) and flat washers (H5) as shown below.

- |        |                                |   |
|--------|--------------------------------|---|
| (H2)x4 | Medium Bolts $\phi 5/16"$ *2"L |  |
| (H4)x4 | Lock Washers 5/16"             |  |
| (H5)x4 | Flat washers 5/16"             |  |
| (H6)x1 | Allen Wrench 5/16"             |  |

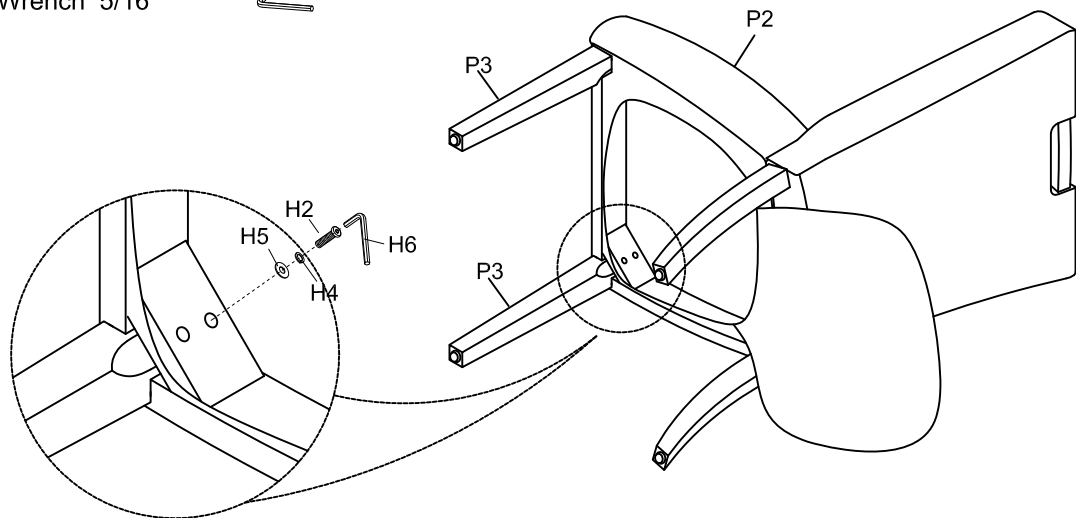

**Step 3.**

- 1) Make sure the chair is level and securely tighten all the bolts with Allen wrench (H6).
- 2) Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

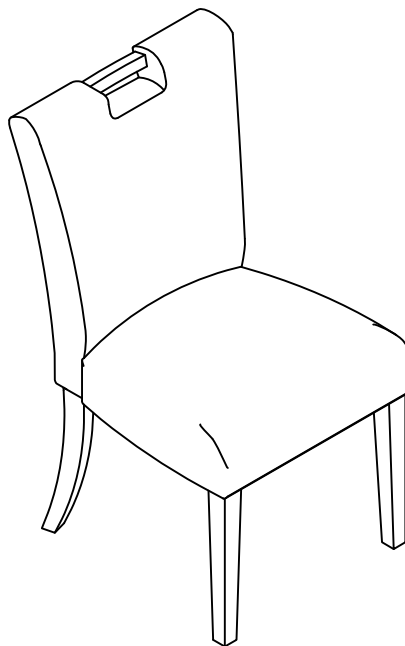

**ADDITIONAL NOTE ABOUT SAFETY:**  
BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE.  
THEY SHOULD BE INSPECTED AT LEAST EVERY 3 MONTHS AND RE-TIGHTENED AS NEEDED TO PREVENT DAMAGE OR INJURY,  
AND ENSURE STABILITY.

Thank you for your purchase