

AIRFUSION CLIMATE LIGHT KIT

SKU# 21024901, 21025001, 21025101, 21025201 Rated Voltage 120V~ 60Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before using the product. Please keep instructions for future reference.

Warranty

- This fitting is covered by a 2 year warranty from the date of purchase. Please retain proof of purchase.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.


Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This product is suitable for indoor use only.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears
 damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF.

Installation directions

- 1. Remove all packaging material from the product.
- 2. Remove the fan bottom cover from the shaft of the fan.
- 3. Remove the shrinkable sleeve from light wires connector (B).
- 4. Remove the lamp shade (G) from the light base (C) by turning it from anticlockwise.
- 5. Connect the light wire connectors (B) together.
- 6. Lift and align the base of the light (C) to the light base bracket (A), allow the bolt go through the keyhole slots and turn the light base anticlockwise. Align the screw holes between the light base (C) and the light base bracket (A) and use the 3 mounting screws (F) to secure.
- 7. Install the bulbs (E, not included) into the lamp holders (D). Do not exceed the maximum wattage rating.
- 8. Reposition the lamp shade (G).
- 9. After the installation, switch on the fitting to test and enjoy your new lighting product.



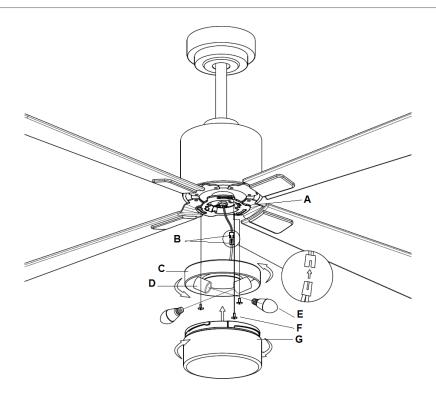

Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or adjustment to the fitting.
- Do not touch the globe with bare hands. Use a clean cloth, gloves or a tissue.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

Specifications

SKU#	21024901	21025001	21025101	21025201
Color	White	Brushed Chrome	Antique Brass	Charcoal
Rated Voltage	120V~ 60Hz			
Rated Wattage	Max.40W x 2			
Lamp Holder	Type B, E12			
Weight	1.34 lb			
Dimensions	H:3.74 inch Dia: 6 inch			
Bulb	Bulb not included			